

*Proceedings of the 5th
US/German Workshop
on Salt Repository
Research, Design, and
Operation*

Fuel Cycle Research & Development

*Prepared for
U.S. Department of Energy
Used Fuel Disposition Campaign
Francis D. Hansen, Christi Leigh
Sandia National Laboratories
Walter Steininger, Karlsruhe Institute
of Technology/ Water Technology and
Waste Management
Wilhelm Bollingerfehr and Thilo von
Berlepsch, DBE TECHNOLOGY GmbH*

*January 30, 2015
FCRD-UFRD-2015-00514
SAND2014-XXXX*



DISCLAIMER

This information was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness, of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. References herein to any specific commercial product, process, or service by trade name, trade mark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the U.S. Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the U.S. Government or any agency thereof.

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the US Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government, nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, make any warranty, express or implied, or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represent that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof, or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof, or any of their contractors.



Sandia National Laboratories

FCT Quality Assurance Program Document**Appendix E
FCT Document Cover Sheet**

Name/Title of Deliverable/Milestone

Proceedings of 5th US/German Workshop on Salt Repository
Research, Design and Operation

Work Package Title and Number

DRSALT-R8D FT-13SN081802

Work Package WBS Number

M3FT-15SN08180210

Responsible Work Package Manager

Robert J. MacKinnon

Date Submitted

(Name/Signature)

Quality Rigor Level for
Deliverable/Milestone QRL-3 QRL-2 QRL-1 N/A* Nuclear Data

This deliverable was prepared in accordance with


Sandia National Laboratories

(Participant/National Laboratory Name)

QA program which meets the requirements of

 DOE Order 414.1 NQA-1-2000**This Deliverable was subjected to:** Technical Review Peer Review**Technical Review (TR)****Peer Review (PR)****Review Documentation Provided****Review Documentation Provided** Signed TR Report or, Signed PR Report or, Signed TR Concurrence Sheet or, Signed PR Concurrence Sheet or, Signature of TR Reviewer(s) below Signature of PR Reviewer(s) below**Name and Signature of Reviewers**

KRIS KUHLMAN



*Note: In some cases there may be a milestone where an item is being fabricated, maintenance is being performed on a facility, or a document is being issued through a formal document control process where it specifically calls out a formal review of the document. In these cases, documentation (e.g., inspection report, maintenance request, work planning package documentation or the documented review of the issued document through the document control process) of the completion of the activity along with the Document Cover Sheet is sufficient to demonstrate achieving the milestone. QRL for such milestones may be also be marked N/A in the work package provided the work package clearly specifies the requirement to use the Document Cover Sheet and provide supporting documentation.

ACKNOWLEDGEMENTS

We are delighted with the organization and assembly of these Proceedings provided by Laura A. Connolly of Sandia National Laboratories. LeAnn Mays, Shannon Casey and V. Dina Howell of Sandia National Laboratories were instrumental in organizing and facilitating the workshop in real-time. Of course, the value of this workshop is measured by advancement of the safety basis for salt disposal. To that end, the authors of these Proceedings owe a debt of gratitude to contributing researchers, who continue to illuminate the path of excellence.

ABSTRACT

The 5th US/German Workshop on Salt Repository Research, Design, and Operation was held in Santa Fe New Mexico September 8-10, 2014. The forty seven registered participants were equally divided between the United States (US) and Germany, with one participant from The Netherlands. The agenda for the 2014 workshop was under development immediately upon finishing the 4th Workshop. Ongoing, fundamental topics such as thermomechanical behavior of salt, plugging and sealing, the safety case, and performance assessment continue to advance the basis for disposal of heat-generating nuclear waste in salt formations. The utility of a salt underground research laboratory (URL) remains an intriguing concept engendering discussion of testing protocol. By far the most interest in this years' workshop pertained to operational safety. Given events at the Waste Isolation Pilot Plant (WIPP), this discussion took on a new sense of relevance and urgency.

The Proceedings summary is divided into a four major areas of discussion, which include operational safety, geomechanics issues, URL concepts, and capturing early evolution of excavation in salt. Performance assessment and the safety case are also central and ongoing themes of these workshops and have been summarized in previous Proceedings. Details can be found in Appendix E, where all presentations and abstracts are available.

1. **Operational Safety.** Operational safety was undertaken as a new topic. The workshop agenda was established before the incidents at the WIPP occurred: a truck fire on February 5 and a radiological release on February 14, 2014. However, these serious operational events provided sharp focus and tangible reality to the topic of operational safety. Participants gained deeper appreciation for the seriousness of operational safety and the complexity involved with recovery from off-normal events. Design of salt repository for high-level waste and spent nuclear fuel takes into account retrievability and safety requirements. Examples are provided in the main text as well as a synopsis of material presented on this topic at the 5th Workshop.
2. **Geomechanics Issues.** As the participants continue collaboration we examine the scientific basis for disposal of heat-generating nuclear waste in salt. With an abundance of scientific information in hand, the group is challenged to articulate remaining geomechanics issues for this purpose. The scientific technical foundation supporting a licensed salt repository has been developed in the US and Germany for many years. Although the level of effort has been inconsistent and discontinuous over this period, site characterization activities, laboratory testing, field-scale experiments, and advanced computational capability provide information and tools required for a license application, should any nation make that policy decision. Ample scientific bases exist to develop a safety case in the event a site is identified and governing regulations promulgated. Some of the key remaining geomechanics issues pertain to application of advanced computational tools to the repository class of problems, refinement of constitutive models and their validation, reduction of uncertainty in a few areas, operational elements, and less tractable requirements that may arise from regulators and stakeholders. These issues pertaining to salt repositories are being addressed in various research, development and demonstration activities in the US and Germany, including extensive collaborations. Research areas such as constitutive models and performance of geotechnical barriers have industry applications beyond repositories. The workshop context pertains to development of a license application, rather than an exploration of the entire breadth of salt research. While esoteric salt-specific phenomenology and micromechanical processes remain of interest, they are not specifically examined in these collaborations to date. The importance of various geomechanics issues and their associated prioritization are subject to ongoing discussion.
3. **Underground Research Laboratory.** Evaluating the basis of need for a URL for salt science and engineering is imperative because of the significant commitment of time and money required.

Decades of salt repository studies, numerous experiments, and sophisticated modeling capabilities underpin the scientific basis that supports safe disposal of nuclear waste in salt. The safety case for disposal of non-heat-generating waste such as transuranic waste interred at the WIPP is robust, with the only long-term releases to the environment projected to be by way of human intrusion. The scientific evidence also favors safe disposal of heat-generating waste. Technical evaluations for disposal of heat-generating waste in salt experienced a rather long hiatus in the US subsequent to certification of the WIPP (1999) and issuance of the Nuclear Waste Policy Act Amendment (1987) that ended salt disposal research for the civilian nuclear waste program. Similar salt repository research in Germany was delayed by a ten-year moratorium that ended in 2010. In collaboration with German peers, the US Department of Energy has reviewed and evaluated thermally driven processes in salt disposal and identified key technical areas in which to prioritize resources. The goal for disposal research in salt is to provide sufficient technical information to license a repository successfully. The necessity or utility of a salt underground laboratory is to be evaluated in the context of an overall research agenda that supports a license application. It is to be mentioned that both in the advanced programs and also in the less advanced ones URLs are considered to be indispensable especially to perform experiments and demonstration activities under repository like conditions.

4. **Capturing Early Evolution of Salt Excavations.** In situ tests implemented in a research facility mined from salt deposits, if planned appropriately, provide an opportunity to characterize the evolution of the host rock before, during, and after excavation of test rooms. Characterization of the test bed is essential to interpret structural deformation, formation and evolution of the disturbed rock zone, and measurement of first-order properties as the salt evolves from an impermeable undisturbed state to a more-permeable state. Geophysical measurements are identified to characterize the initial state of a test bed and its evolution over the course of a field test. Discussion includes what measurements could be made, why the measurements would be made, how they are made, and how accurately they need to be made. Quantifiable parameters will establish field-scale boundary conditions and data quality objectives to characterize the test bed in an underground salt research facility. This work ties together model prediction and confirmation of geophysical phenomena that are basic to the goals of the US/German salt workshops.

Principal evolutionary measurements make it possible to monitor geomechanical response and the associated changes in permeability. This progression will help establish boundary conditions for later tests conducted within the excavations. Pretest predictions of the response include strain magnitudes, room closure, and margins of the damaged zone. In turn, evolutionary measurements themselves will allow assessment of the predictive capability. Geomechanics modeling provides a basis for data quality objectives, which help define instrumentation requirements. Sufficient detail is provided to install gauges, conduct tests, and describe applicable functional and test-specific requirements. This type of forward thinking provides a primary means to reach and document consensus on all aspects of a test or experiment, including design, cost, schedule, interface controls, and data management. It might be interesting to consider such activities as a part of a monitoring program.

Collaborators continue to compile an international catalogue for Features, Events and Processes (FEPs) pertaining to the safety case for disposal of heat-generating nuclear waste in salt referring to existing catalogues for domal and bedded salt. Differences and similarities between bedded and domal salt are being examined. The goal is to have available a FEPs catalogue for use by the Nuclear Energy Agency (NEA) Salt Club members. The catalogue will identify and classify FEPs leading to a comprehensive list. A subset of the most important FEPs that individually or in combination contribute to long-term repository performance will be compiled using a new documentation template and numbering system. Overall, this is a large effort that will eventually become a product of the NEA Salt Club.

These Proceedings conclude with certain reflections on progress made. Our focus remains on issues pertaining to salt repository research, design and operation. We continue to challenge ourselves to develop products collaboratively that objectively document progress and deliver resources to external groups. As particular topics mature, new themes are added. In the following Proceedings, four selected topics noted above are developed in detail. Specific additional reference detail can be acquired from the abstracts, source references found throughout, and oral presentation slides included in Appendix D of this document.

CONTENTS

ACKNOWLEDGEMENTS	iv
ABSTRACT	v
CONTENTS.....	viii
TABLE OF FIGURES	ix
ACRONYMS	x
1 STATEMENT OF SIGNIFICANCE	1
2 INTRODUCTION	2
3 DESIGN AND OPERATIONAL SAFETY	3
3.1 Design Safety	3
3.2 Operational Safety.....	5
4 GEOMECHANICS ISSUES.....	6
4.1 Evolution	7
4.2 Modeling.....	9
4.3 US/German Collaboration	11
4.4 Lessons Learned from the VSG.....	12
4.5 Geomechanics Going Forward.....	14
5 A URL IN THE CONTEXT OF SALT DISPOSAL RESEARCH	16
5.1 Discussion.....	17
5.2 Framework	18
5.3 Use of the URL.....	19
5.4 Concluding Remarks on Salt URLs	19
6 CAPTURING EARLY EVOLUTION OF SALT OPENINGS.....	20
6.1 Salt Behavior	21
6.1.1 Geomechanical Measurements	21
6.1.2 Room Closure.....	22
6.1.3 Damage Evolution.....	22
6.2 Structural Analysis	22
6.2.1 Geomechanics Modeling.....	23
6.2.2 Results.....	23
6.3 Permeability Measurements.....	24
6.3.1 Gas Flow.....	25

6.3.2	Brine Flow	25
6.3.3	Data Quality Objectives	26
7	CONCLUDING REMARKS	26
8	REFERENCES	29
	APPENDIX A: AGENDA	33
	APPENDIX B: WELCOME ADDRESS:.....	37
	APPENDIX C: LIST OF PARTICIPANTS AND OBSERVERS FROM 5th WORKSHOP	41
	APPENDIX D: PRESENTATIONS	43

TABLE OF FIGURES

Figure 3.1:	Site-specific design of a repository- drift disposal concept (basis: VSG design) in view of retrievability	5
Figure 4.1.	Creep of rock salt. a) Extension of a power law creep model to low stresses compared to measurements at low creep stresses. b) Creep tests results of WIPP-samples at different temperatures (clean salt strata), approximated with the constitutive Günther-Salzer law.	8
Figure 4.2.	Permeability-porosity data sets for crushed salt and mixtures.....	9
Figure 4.3.	Benchmarking Room D deformation.....	11
Figure 4.4.	Simplified NW-SE geological cross-section of the Gorleben salt dome.	13
Figure 6.1.	Damage contours from Geomechanics models.	23
Figure 6.2	Displacements as a function of position between observation drift and test drift.....	24

ACRONYMS

ABC	Actinide and Brine Chemistry (Workshop)
ARMA	American Rock Mechanics Association
BAMBUS	Backfilling and Sealing of Underground Repositories for Radioactive Waste in Salt / Germany
BGR	Federal Institute for Geosciences and Natural Resources (Germany)
BMU	Bundesministerium für Umwelt (German Federal Ministry for the Environment, Nature Conservation and Nuclear Safety)
BMWi	Federal Ministry for Economic Affairs and Energy (Germany)
BSEP	Brine Sampling and Evaluation Program
DBE Tec	DBE Technology GmbH
DOE	Department of Energy
DOPAS	Full Scale Demonstration of Plugs and Seals
DQO	Data Quality Objective
DRZ	Disturbed Rock Zone
EC	European Commission
EDZ	Excavation Damaged Zone
ELSA	Schachtverschlüsse für Endlager für hochaktive Abfälle (Shaft Seals for Repositories for High-Level Radioactive Waste)
EM	Office of Environmental Management
EPA	Environmental Protection Agency
EWG	Containment Providing Rock Zone
FEPs	Features, Events, and Processes
GRS	Gesellschaft für Anlagen- und Reaktorsicherheit mbH
HLW	High-Level Waste
IAEA	International Atomic Energy Agency
IfG	Institut für Gebirgsmechanik GmbH
IGD-TP	Implementing Geological Disposal of Radioactive Waste Technology Platform
KIT	Karlsruhe Institute of Technology
MoDeRn	Monitoring Development for Safe Repository Operation and Staged Closure
MoU	Memorandum of Understanding
MPBX	Multipoint Borehole Extensometer
NE	Office of Nuclear Engineering
NEA	Nuclear Energy Agency
NRC	Nuclear Regulatory Agency
NWTRB	Nuclear Waste Technical Review Board
OECD	Organisation for Economic Co-operation and Development
PTKA-WTE	Project Management Agency, Water Technology and Waste Management
R&D	Research and Development
RD&D	Research Development and Demonstrations
REPOPERM	Restporosität und permeabilität von kompaktierendem Salzgrus-Versatz
SIERRA	Sandia Integrated Environment for Robust Research Algorithms

SNL	Sandia National Laboratories
THM	Thermal Hydrological Mechanical
TU	Technical University
TUBS	Technical University Braunschweig
URL	Underground Research Laboratory
US	United States
VSG	Vorläufige Sicherheitsanalyse Gorleben (Preliminary Safety Analysis)
WIPP	Waste Isolation Pilot Plant

Proceedings of the 5th US/German Workshop on Salt Repository Research, Design and Operation

Meeting Venue: La Fonda Hotel
Santa Fe New Mexico
September 8-10, 2014

Frank D. Hansen and Christi Leigh, Sandia National Laboratories (SNL)

Walter Steininger, Karlsruhe Institute of Technology (KIT)/(PTKA-WTE)

Wilhelm Bollingerfehr and Thilo von Berlepsch, DBE Technology GmbH

1 STATEMENT OF SIGNIFICANCE

The German Ministry collaborates with the United States (US) salt researchers under a Memorandum of Understanding signed by the US Department of Energy (DOE) and Federal Ministry for Economic Affairs and Energy in Germany (BMWi), a reflection of a long and trusted cooperation. This agreement has allowed salt repository engineers and scientists to advance the basis for salt disposal in the US and Germany.

Through these collaborations, past-present-and-future research is evaluated, which in turn illuminates the frontier of salt repository research, development and demonstration. In addition, collaboration between the US and Germany helps preserve knowledge, while at the same time mentoring the next generation of salt repository scientists. Together, the nations of Germany and the US define and explore salt-repository knowledge established in both countries over many years.

Under the patronage of the Organisation for Economic Co-operation and Development's (OECD's) Nuclear Energy Agency (NEA), recent collaborations have advanced an international Salt Club which permits stewardship of national programs in Germany and the US while providing derivative benefit to the international community.

Building the scientific basis for salt disposal combines the extensive knowledge from Germany on domal salt structures with that from the US on bedded salt formations. Collectively, salt researchers combine the technical basis for salt disposal in either geologic setting as their national site selection programs moves forward.

Partnerships among researchers on salt repositories ensure that science and engineering effective at the state of the art is accomplished. Bringing together the best minds in salt repository research, design and operation addresses a wide breadth of issues and facilitates the capability to dive deeply into selected issues.

Collaboration helps extend budgets of both countries, broadens personnel capabilities, and improves productivity over time. A prime example is a Joint Project (JP) between German and US modelers. This benchmarking exercise tests the best-in-the-world salt constitutive models on high-end computing platforms. This collaboration will identify the best modeling tools for future salt repository design, analysis, and performance assessment.

Although Germany and the US have collaborated for many years, workshop proceedings document solidification of the recent relationships enriched by the historic past and which sets the mutual programs on a productive course.

2 INTRODUCTION

Proceedings of the 5th US/German Workshop on Salt Repository Research, Design, and Operation provide a summary of the sequence of presentations and discussions and deliver a record of our workshop activities. Since restarting close US/German collaborations in 2010, annual workshops have assembled invited key investigators in salt repository science and engineering to address a coordinated research agenda. The authors of these Proceedings have functioned as the primary coordinators of these workshops and they are responsible for the scientific agenda and reporting. The workshops were put together for the mutual benefit of the US and German salt repository programs, which face the challenges of preserving and improving capabilities in salt repository science and technology.

US and German researchers have collaborated in salt repository research since the 1970s, where early collaboration between the US and West Germany involved thermal testing in the Asse Mine. Steininger and Hansen recount a chronology of salt repository research in the first presentation of these Proceedings. Note: all workshop presentations are provided in Appendix E. Techniques for waste emplacement and demonstration have been executed in Germany and the US. Instruments, tools and methodologies for modelling used in the safety assessment have been substantially developed and applied. Scientific work on salt repositories for nuclear waste is augmented by national programs in solution mining, strategic petroleum reserve, and traditional salt and potash mining where real-world applications are proven.

Direct collaborations between Germany and the US on salt disposal of heat-generating waste experienced a ten-year hiatus between 2000 and 2010 owing to political decisions and a formal moratorium in Germany. When the moratorium lifted in 2010, representatives of institutions in both countries wished to renew collaborations and cooperation on overall salt repository science, to coordinate a potential research agenda of mutual interest, and to leverage collective efforts for the benefit of their respective programs. Thereupon, the *first* of the new US/German Workshops on Salt Repository Research, Design and Operation collaboration was organized. Initial intentions were to exchange experiences and know-how to inculcate external expertise and feedback. Perceived benefits were first to make science-based recommendations on the pros and cons of the host rock, to add mutual value while sharing costs, and to garner internationally held opinions as well as facts.

This annual workshop is a poster child of our cooperation. There is a long tradition of co-operation between the US and Germany dating back to the 1970s. Some of our American colleagues were part of the research being done then, especially in the underground laboratory in the Asse research mine in Germany. We well remember the famous “BAMBUS” project, the world’s first long-term demonstration experiment.

Changes in political priorities in both countries repeatedly led to the joint research work being put on hold. However, in the scientific community the view prevailed that it is indeed technically feasible to construct, operate, and safely close final repositories within salt rock formations.

Starting in 2009, both countries have again been more open-minded about rock salt to host final repositories and thus reverted back to the long-standing tradition of German-US co-operation in this area. So far, four workshops have been held as part of the effort to share scientific experience and resume our fruitful co-operation.

Dr. Pape—Welcome Address Excerpt

(Complete Text in Proceedings)

By the time of this 5th Workshop, accomplishments and on-going activities include an impressive portfolio, [Steininger et al. 2013] all recorded and accessible electronically at our website (http://energy.sandia.gov/page_id=17258).

At a high level, US/German collaboration is conducted under a Memorandum of

understanding between our federal agencies. Results of our cooperation contribute to the OECD/NEA Salt Club. Significant reported work thus far includes natural analogues, a FEPs catalogue for salt, a state-of-the-art report on granular salt reconsolidation and a salt knowledge archive.

Engagement between researchers has given rise to many derivative activities. Notable is collaboration in the Joint Project on benchmarking constitutive models for rock salt between Sandia National Laboratories (SNL) and German organizations. Presentations on the third part of the Joint Project (JPIII) are provided by Hampel and Argüello in Appendix E. Collaborators also advance salt science in related conferences and workshops, such as the American Rock Mechanics Association (ARMA) conferences, Mechanical Behavior of Salt Symposia, and the annual Waste Management conference. Reinvigoration of salt research is strikingly apparent at the 2014 ARMA conference, which entertained five sessions on *salt* with many contributions made by US/German collaborators. Collective efforts were completed and reported in the European Commission (EC) Euratom-Project 7th Framework Program called Monitoring Development for Safe Repository Operation and Staged Closure (MoDeRn). Ongoing collaboration and information exchange in the area of safety case encompass a joint activity on *Handling of Uncertainties* in the framework of the IGD-TP (Implementing Geological Disposal of Radioactive Waste Technology Platform <http://www.igdtp.eu>).

This 5th Workshop carries on a content-rich tradition with the addition of the topic of Operational Safety. A keynote address was provided by J. Stephen Rottler of SNL (complete presentation is provided in Appendix E). In addition to JPIII modelling, laboratory testing, repository design, plugging and sealing, safety case and performance assessment, notes from the Salt Club, and other collaboration topics were covered at the 5th Workshop. As always, advanced and mature considerations are documented and published, allowing room for introduction of other relevant areas of mutual interest.

3 DESIGN AND OPERATIONAL SAFETY

In this section, we describe retrievability and safety requirements pertaining to design of a repository for high-level waste and spent fuel (HLW and SF).

3.1 Design Safety

The first generic repository concepts for the disposal of heat-generating waste and spent fuel in salt formations in Germany have been developed on the basis of safety requirements in the 1980s. A continuous improvement process led to a reference concept. Full-scale transport and emplacement technologies have been tested successfully in surface test facilities, again in compliance with safety requirements. In 2010, the Bundesministerium für Umwelt (German Federal Ministry for the Environment, Nature Conservation and Nuclear Safety) [BMU 2010] issued the new *Safety Requirements Governing the Final Disposal of Heat-Generating Radioactive Waste*. The safety requirements focus on retrievability and make it a strict licensing requirement. According to the safety requirements, retrievability is considered as the planned technical option to remove emplaced radioactive waste containers from the repository during the operational period. In order to meet these requirements, adaptations to existing repository concepts must be analyzed. These adaptations and modifications could include

- an optimization of the spacing between waste containers and drifts
- the installation of adequate drift or borehole lining systems where necessary
- adaptions to the ventilation system
- the implementation of cooling systems
- monitoring and radiological protection measures during the retrieval process

As an example for the analysis of the necessary design adaptions the drift disposal concept was considered. It comprises the emplacement of heat-generating radioactive waste and spent fuel in standardized POLLUX® casks (casks with a cylindrical shape, a diameter of 1.5 m and a length of 5.5 m)

on the floor of emplacement drifts of a repository. The layout is characterized by two access drifts from the two shafts. The access drifts are connected by cross-cuts which provide access to the emplacements drifts (parallel blind-ending drifts). The dimension of the emplacement device defines the minimum cross section of 17 m² for the emplacement drifts. Directly after emplacement, the remaining space inside the drift will be backfilled with crushed rock salt. The emplacement equipment (shaft hoisting system, transport unit and emplacement device) was successfully tested by DBE in the mid-nineties. These surface demonstration tests showed the technical feasibility of the emplacement concept and the reliability of the technical devices.

One option to retrieve POLLUX® casks from the emplacement drifts is the re-mining strategy. This strategy includes the re-excavation of the backfilled emplacement drifts, the access drifts and the cross-cuts (Figure 3.1). The new retrieval drifts will be excavated in three steps. First, two small drifts will be excavated at both sides in parallel to the waste containers. They will be connected with the nearest cross-cuts and will provide continuous ventilation and cooling. Afterwards, the remaining pillar between the two drifts will be removed by road headers and modified mining equipment. Eventually, the final retrieval drift provides a cross section sufficiently large to pick up the POLLUX® casks with a modified emplacement device. It is necessary to adapt the supporting frame for lifting and carrying the POLLUX® cask and to change the rail-bound system for retrieval. The modified emplacement device will transfer the POLLUX® cask to a transport cart. The transport back to the shaft and afterwards to the surface will be realized in reverse order to the emplacement process.

However, it is noted that before the POLLUX® casks can be retrieved, a concept for their subsequent handling and storage aboveground must be implemented. In the context of a research and development (R&D) project on behalf of the Karlsruhe Project Management Agency, DBE Tech will analyze in more detail the technical consequences of the retrieval requirement and the subsequent management of waste container. There still is a series of questions to be answered before state-of-the-art system has been achieved. Eventually the retrieval technique has to be confirmed in a series of demonstration tests.

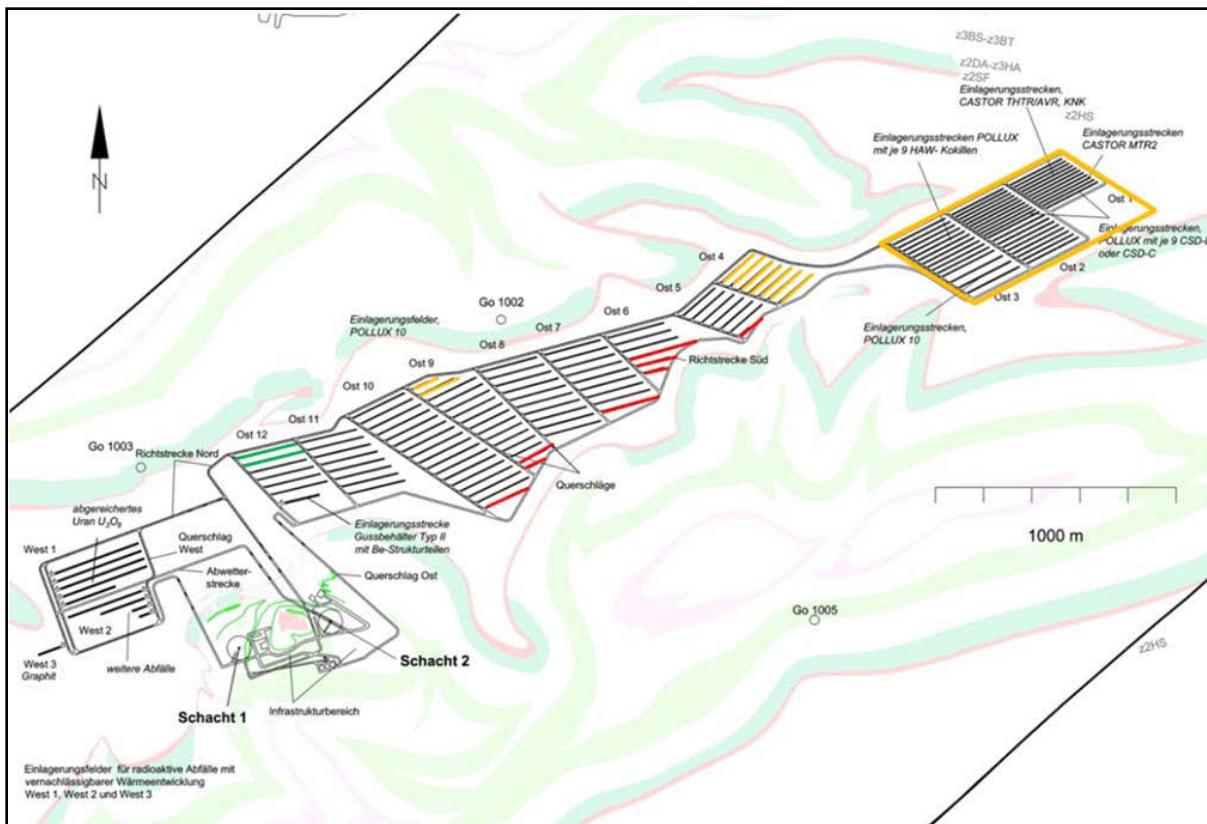


Figure 3.1: Site-specific design of a repository- drift disposal concept (basis: VSG design) in view of retrievability

Detailed planning of retrieval actions:

- green: retrieval drifts
- red: retrieval drifts not connected with a second crosscut
- yellow: retrieval drifts connected with main transport drift North
- yellow frame: prior to excavation start need for geomechanical proof of pillar stability)

3.2 Operational Safety

Operational Safety is an overriding concern from the first design of a repository for HLW and SF in salt formations to the closure phase. As geologic repository projects advance throughout the world, implementors and regulators are increasingly concerned with operational issues. In parallel, regulatory regimes develop further from pure deterministic to probabilistic approaches for nuclear installations in general. At present, only Germany and the US have real experience in the operation of geologic repositories. Hence, at last year's US/German Workshop it was agreed to organize this year a session specifically dedicated to operational safety. The two unfortunate events early in 2014 at the WIPP imparted an unexpected relevance to operational safety.

The relevance became obvious in that a central topic of the keynote address had been precisely operational safety. Insights were given to operational safety across a wide spectrum of activity of SNL. Dr. Rottler highlighted examples spanning a variety of research, design, development, prototype, qualification and production activities, where the breadth of work encompasses micro- to macro-scale efforts with varying levels of complexity. For the 2718 labs located within Sandia National Laboratories, multiple hazards in combination typically have to be considered. To ensure safety in this highly complex environment the approach of Engineered Safety had been developed and introduced at SNL. Engineered Safety means that operational systems are systematically and critically analyzed to identify ways in which they can fail to perform as intended, and, hence, are designed and validated to prevent identified failure modes and to mitigate the consequences of a failure should one occur. At each planning and design step safety is considered by systematically asking guiding questions involving the entire staff and management. How the approach is implemented in reality was explained by Dr. Rottler by means of the examples of a bioremediation project, a polymer R&D laboratory, and the Z-Machine accelerator containment system. A very important basis for gaining safety is implementing a Critical Thinking Mindset which means to encourage critical thinking in daily life.

Concerning geologic repositories, safety is governed by requirements from nuclear regulation, mining regulation, and public law. A similar approach is followed in Germany for geologic repositories as it is the case for SNL. Safety is key for the design of technology and for its operation. But safe designs and procedures must be backed by the right mindset of the staff. If the staff is not fully and wholeheartedly committed to safety, all safety would be ineffective. But even in normal and undisturbed operation the potential occurrence of hazards has to be considered in order to be prepared in case that a hazard actually does happen. Protecting people has highest priority in case of a hazard. Hence, staff has to be sufficiently trained and safety equipment and systems have to be adequately designed.

Developments and changes occur in the approach to safety, and also the evaluation of safety. A very recent and important development is the increasing relevance of probabilistic approaches in the regulation of geologic repositories. The shift from deterministic to probabilistic approaches is clearly exemplified in the US DOE nuclear facility safety analysis (WIPP Documented Safety Analysis) and the Yucca

Mountain License Application. For the Yucca Mountain Project probabilistic requirements have even been formalized in the U.S. safety regulation (10 CFR Part 63). The approach is evolutionary in that event compilation, sequence development, and hazard analysis are performed using traditional methods, combined with probability estimation under uncertainty, and explicit simulation of dose consequences for comparison to quantitative regulatory screening criteria. It can be seen that operational safety analysis is changing, at the same time that safety experience is accumulating at existing facilities. Especially for new systems and technologies, probabilistic approaches provide important supplements for safety demonstration. Nevertheless, since probabilistic approaches for large-scale systems are yet under development it is of vital importance to facilitate an international exchange in order to avoid diverging methodologies, respectively to build up confidence in probabilistic approaches.

Real life implication of operational safety issues could be observed in the unfortunate sequence of events and combination of events which happened in the WIPP facility in February 2014. Two incidents, a truck fire and an apparently unrelated radioactive release, occurred after fifteen years of successful operation. Despite the independence of the two events, a root cause was found to be insufficient safety culture [DOE 2014], which resulted in ineffective nuclear safety, maintenance, radiation protection, and emergency management programs. However, a route to overcome deficiencies and an approach to bring WIPP back into operation has been developed. Despite the unfortunate sequence of events, the idea of isolation of radioactive waste in geologic formations is not questioned.

In addition to the description of the events and the formal criticism, there are also positive findings to be recounted. Warning and mutual assistance of workers underground was effective and personnel exhibited detailed knowledge of the underground and ventilation splits. On-site medical response was effective in treating personnel. Technically, it can be concluded that the mine remains safe and stable. On that basis the main immediate activities have been developed and implemented. Special attention is directed to the evaluation of the situation in the area of the mine in which the radioactive release occurred. A key conclusion, which also closed the loop of the session, was that nuclear safety culture is a driving factor for WIPP's future.

The discussion at the end of the session showed that operational safety considerations are an important contribution to the US/German workshop. While operational safety activities on site are very much dependent on the governing general regulatory regime and existing culture, regulatory requirements and methodologies for the assessment and evaluation of operational safety are still in development. Hence, chances were seen by the workshop participants to fruitfully and constructively contribute to the development by joint activities. Nevertheless, it was also seen as being meaningful to mutually follow operational activities on site as well in the course of the US/German workshop.

4 GEOMECHANICS ISSUES

This section provides several examples of direct collaboration in the area of geomechanics, which advance salt repository science. To capture the extent of the geomechanics issues, background information is provided to demonstrate historic perspective of the research agenda. Geomechanical response of the geologic formation to perturbations caused by excavation, structural evolution over time, subsequent disposal of heat-generating waste, and emplacement of sealing systems are first-order concerns for heat-generating nuclear waste disposal in salt. Use of salt formations for toxic waste and transuranic waste disposal is supported by broad technical understanding and experience gained from operating facilities in the US and Germany. The WIPP in New Mexico represents a successful process of site characterization and licensing of a salt repository in the US, while Germany has compiled the Preliminary Safety Analysis for Gorleben (Vorläufige Sicherheitsanalyse Gorleben or VSG) [GRS 2012]. Sufficient scientific bases exist to develop a viable safety case for heat-generating waste if a national program should decide to move in that direction.

Ongoing collaborations between US and German salt researchers continue to add to the imposing scientific basis for permanent disposal in salt. In this section, it is possible to present only a few highlights

of saltrepository scientific inquiry. Additional detail of the most recent several years of accomplishment can be found on our website [http://energy.sandia.gov/?page_id=17258]. Collaborations facilitate evaluation of many elements of salt research, design and operation, which include testing on all scales, advanced thermal-mechanical modeling and benchmarking, and seal system performance, to name a few. Laboratory and field testing applied to nuclear waste disposal, particularly dealing with temperature effects, has been conducted since the 1960s. Decades of R&D have rendered a mature understanding of salt formation behavior as well as interactions between the salt and engineered and geotechnical barriers. The maturity of the technical basis for salt disposal also facilitates identification of areas where uncertainty can be reduced, areas where advanced computational capabilities can be brought to the problem and areas where operational and long-term improvements can be gained.

The US DOE's goal is to have a repository sited by 2026; the site characterized, and the repository designed and licensed by 2042; and the repository constructed and its operations started by 2048 [DOE 2013]. Given this time line, one daunting challenge will be preservation of accumulated knowledge and competence maintenance over the next 20 years. Ongoing international salt research collaboration is one well recognized development that contributes to knowledge preservation, which is systematically achieved by mentoring the next generation of scientists.

The geomechanical reaction to excavation establishes the starting point for all repository activities that ensue. Section 4.1 provides a brief description of the mechanical response and evolution of the salt underground initiated by excavation. These inescapable developments establish boundary conditions for the concept of operations, long-term repository evolution, and any field-scale testing that might be undertaken. Section 4.1 also provides an overview of ongoing geomechanics matters pertaining to room closure. Section 4.2 reviews code benchmarking of salt constitutive modeling and implementation using large, modern computational capacity. Section 4.3 summarizes progress made through international collaborations, particularly with German research groups. As documented in Section 4.5, the experience of preparing the preliminary safety assessment for Gorleben represents not only a high level of knowledge and advanced long-term safety analyses, but helped also to identify specific areas for additional research. US/German workshops on salt repository research, design and operation have progressively identified and addressed common issues, many of which pertain to geomechanics. Section 4.6 summarizes some of the geomechanics issues that can be constructively addressed in the near future. This section includes information that is being prepared for an invited, external publication [Hansen and Popp 2015].

4.1 Evolution

The technical basis for salt disposal of nuclear waste resides in salt's favorable physical, mechanical and hydrological characteristics. Undisturbed salt formations are essentially impermeable and exist in essentially isostatic equilibrium. When openings are created the state of stress is altered and salt deformation ensues. Understanding the features of salt deformation constitutes the bulk of geomechanics addressed in this section. Salt deformation can occur while preserving constant volume (isochoric) or can include damage, which increases permeability. Salt damage can be reversed under certain stress conditions and fracture healing is a vital feature of operational and long-term salt repository performance. Room closure is a combined result of isochoric creep at some distance from the opening, damaging salt deformation proximal to the free surfaces, and discontinuity contributions from interbeds, such as anhydrite and clay. Depending on design and operational choices, room closure eventually brings formation salt into contact with material placed within the openings, whether it is waste packages, geotechnical barriers, or run-of-of-mine salt used for backfill. Reconsolidation of granular salt constitutes another fundamental process that must be understood to ensure operational and long-term sealing performance. Geomechanics is concerned with all these phenomena, including possible thermal effects.

Accurate prediction of salt repository response is enhanced by a thorough understanding of the mechanistic processes and application of valid models. In the instance of a salt formation providing the host medium, the scientific community has made great strides toward formulating and using models that

capture observed physical phenomena in computational mechanics applications. Incorporation of micro-mechanics helps explain history effects, normal and inverse transient responses, and dependence of creep rate on stress difference and temperature, which are direct consequences of existing and evolving substructures. If one understands the physical processes, operational and long-term predictions can be made with a measure of confidence.

Extension of this principle to micromechanics of deformation at very low stress difference is especially challenging. Minute strain measurements require extreme load and temperature control, although some outstanding experiments have been conducted [Bérest et al. 2005]. Changes to the microstructure would likely be below detection and documentation using normal microscopic techniques. Nonetheless, creep behavior of salt at low stress differences appears to be substantially faster than predicted from extension of power law models based on dislocation creep mechanisms parameterized from tests under repository conditions as shown in Figure 4.1. Conventional laboratory experiments, usually performed at differential stresses > 5 MPa, reflect steady state dislocation creep rate as a function of stress difference raised to a power greater than one, of which 4.9 is typical [Hardin et al. 2014]. When this relationship is extrapolated to low stress levels, the creep rate is much less than measured. Recently, an extensive series of creep lab tests on clean WIPP salt was performed using a new sophisticated creep test approach consisting of a series of single tests with load and unloading steps at overlapping stresses [Günther et al. 2014]. The test results confirm qualitatively the suggested dependence of creep behavior according to different stress regimes and show, in addition, the overlapping effect of temperature. A reasonable approximation of creep behavior is obtained using the advanced Günther/Salzer material law, but the remaining uncertainties at low stresses are obvious. Therefore, further work is needed to evaluate creep at low stress and high temperature levels and to resolve the deformation mechanisms.

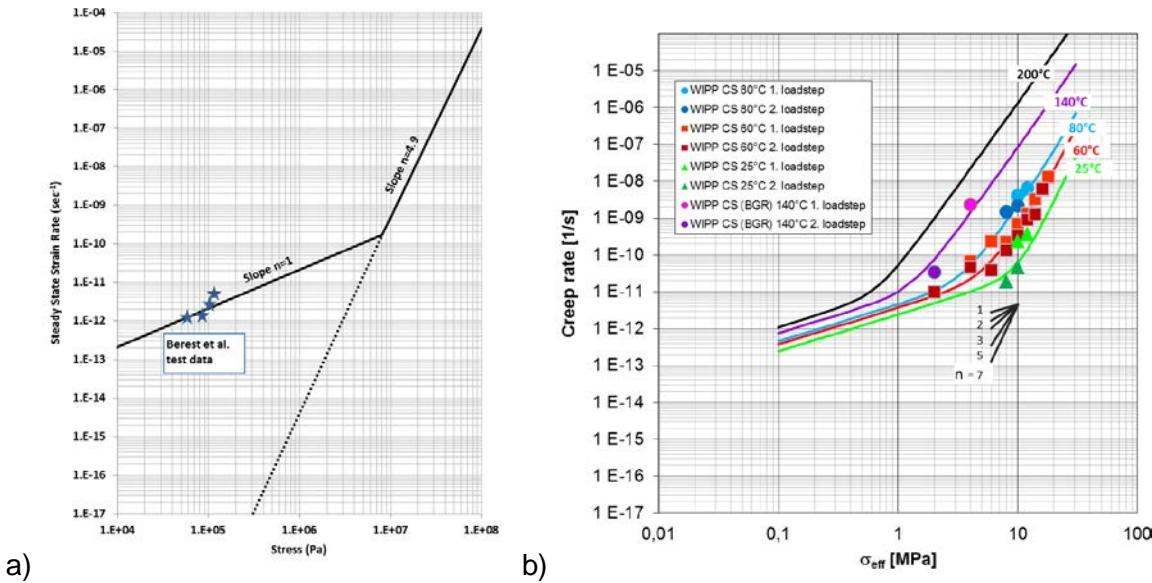


Figure 4.1. Creep of rock salt. a) Extension of a power law creep model to low stresses compared to measurements at low creep stresses. b) Creep tests results of WIPP-samples at different temperatures (clean salt strata), approximated with the constitutive Günther-Salzer law.

Upon mining, a salt formation experiences damage in the near-field rock proximal to the mined opening and salt permeability increases dramatically. The volume of rock that has been altered by such damage is called an excavation damaged zone (EDZ) or disturbed rock zone (DRZ). Creation of the DRZ can enable formation brine to flow into the mined opening via increased permeability. The mechanical response to excavation initiates several important changes to the favorable characteristics that exist in salt formations

before excavation takes place. Investigations that utilize the underground for experimental activities would benefit greatly from the knowledge of initial, undisturbed conditions, the evolutionary changes imparted by excavation, and the boundary conditions extant when field activities are undertaken. This concept is developed further in Section 6 of these Proceedings and is being prepared for external publication [Hansen et al. 2015]. Regulatory compliance of a geologic repository in salt is demonstrated in part by credible representation of DRZ development and healing around panel and shaft seals to prevent this zone from becoming a pathway for radionuclide movement. Understanding DRZ development is essential to design and analysis of waste containment systems during disposal operations as well as to the design and analysis of repository sealing systems to fulfill permanent closure functions. Looking forward, ongoing research in these areas provide the basis for modular repository design, including closure systems in drifts, sectional closure, performance assessment, and input to sequential licensing.

Concepts for disposal operations and seal systems often include elements of crushed salt. Disaggregated salt can reconsolidate to a state approaching the native, undisturbed salt. Mechanical, thermal, and hydrological properties change as a function of porosity. Of these, the permeability/porosity function is the most important in terms of repository performance. Considerable research has gone into illuminating mechanical processes responsible for the observed permeability/porosity relationship illustrated in Figure 4.2 [IfG 2012; Kröhn et al. 2009]. The preponderance of consolidation experimental work, as well as analogue examples, suggest that reconsolidating granular salt will achieve a state of extremely low permeability. Development of the arguments is still advancing, which include new experiments that consolidate salt/bentonite mixtures. How quickly granular salt reconsolidates to performance specifications remains a key question. Construction techniques can utilize research results to place crushed salt seal elements to maximal density using optimal additives.

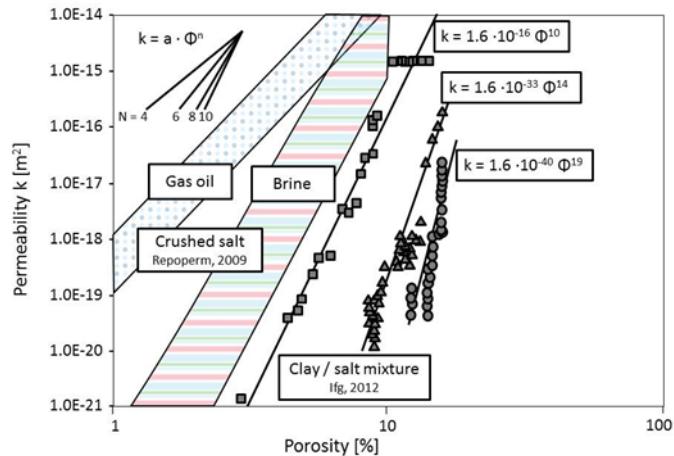



Figure 4.2. Permeability-porosity data sets for crushed salt and mixtures.

4.2 Modeling

Computer-based geomechanical modeling of salt repositories has been one of the most important activities in salt repository science and remains so today. Remarkable progress is possible because computational hardware has advanced significantly over the last 20 years. Modeling capability includes representation of thermal-mechanical behavior over long time periods, appreciable variations of temperature, nonlinear large deformation (finite strain) and other phenomena associated with salt deformation in the repository setting. Integral to modeling studies are conventional issues of discretization, stability, and accuracy. A current research challenge is to identify best-in-class constitutive models, simulation architecture, and solution algorithms appropriate for analyzing the performance of underground salt repositories. To this end, a consortium called the Joint Project between SNL and

German partners is comparing constitutive models and simulation procedures. Modeling will simulate WIPP Rooms B and D, of identical geometry but different thermal loads. Calculations are isothermal, thermal-mechanical uncoupled, and thermal-mechanical coupled. Sandia uses a state-of-the-art Sandia Integrated Environment for Robust Research Algorithms (SIERRA) solid and thermal mechanics computer codes [Argüello 2014], while the German partners use their respective codes and models as described by Hampel et al. [2012; 2013]. All calculations use highly advanced constitutive laws that mathematically describe deformational processes inherent to those found in nuclear waste repository environment. The first goal of the project is to check the ability of numerical modeling tools to correctly describe relevant deformation phenomena in rock salt under various influences.

Twenty years ago or longer, models of WIPP large-scale experiments often matched the field data well [Munson et al. 1988; 1990]. Despite limited discretization, modeling symmetry assumptions, two-dimensional plane strain grids, field test results could be remarkably well reproduced by finite element models. Validation modeling in the Joint Project will include existing ambient and elevated temperature room response data to compare current constitutive models and simulation procedures for calculations of the thermal-mechanical behavior and healing of rock salt. A preliminary example of these benchmarking legacy calculations of WIPP Room D is shown in Figure 4.3. In Figure 4.3a) an all-salt idealization with relatively coarse mesh matched the vertical closure precisely, while a model with more detailed stratigraphy resulted in calculated closures below the measured values. By comparison, using a mesh about 8 times finer, Argüello [2014] obtains the results shown in Figure 4.3b). As Argüello points out, an under-refined mesh is typically stiffer, but it would appear that parameters and features, such as the coefficient of friction of clay seams, were adjusted to match test results in legacy calculations. In lieu of testing, assumptions were made about the clay seam behavior in closure measurements associated with Rooms B and D. These are just examples of challenges being addressed by the Joint Project partners.

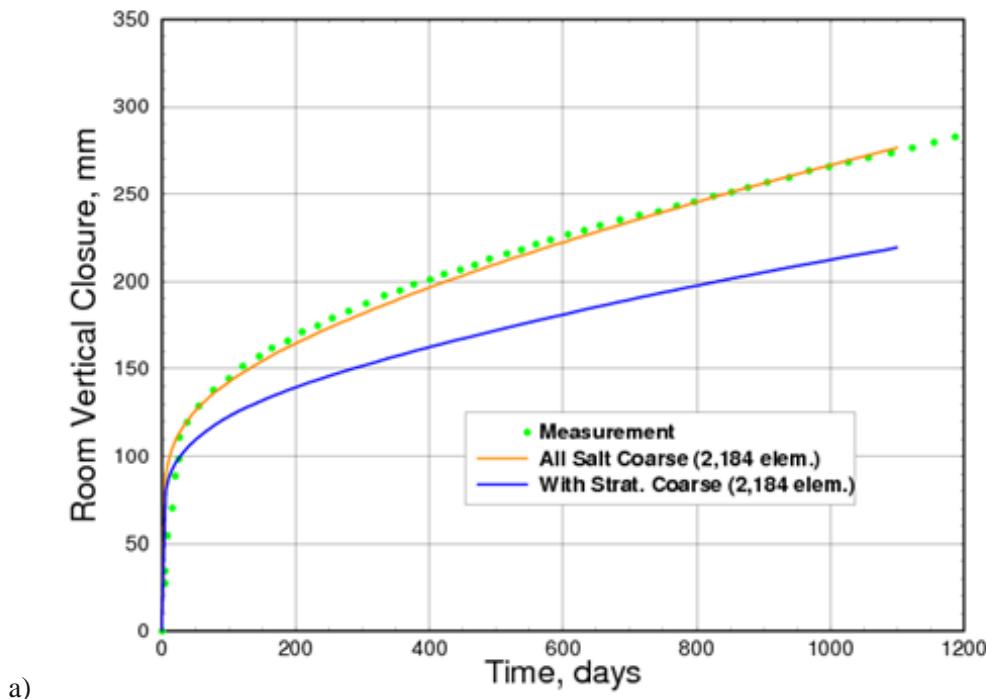

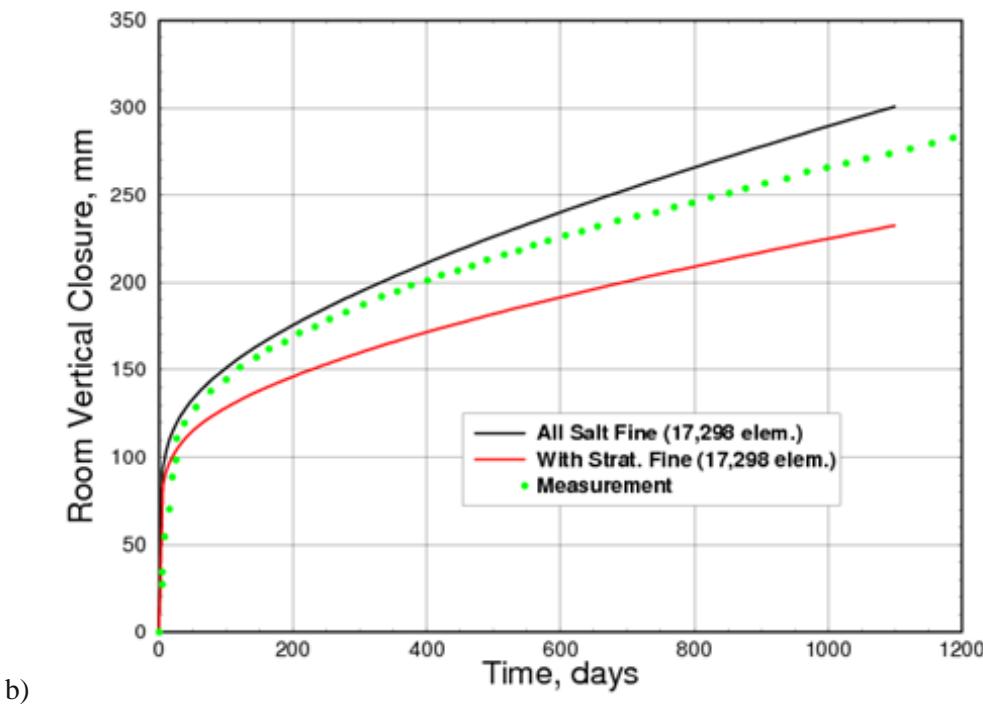


Figure 4.3. Benchmarking Room D deformation.

International collaboration on model benchmarking is complemented immensely by additional testing of WIPP salt cores by German research laboratories. In concert with benchmarking of WIPP in situ experiments, German research groups are parameterizing their respective model variables through a series of special laboratory tests on WIPP salt. Thus their codes and models, which have been thoroughly calibrated against in situ experiments conducted in domal salt formations, will be appropriately parameterized for generic salt repository analysis with the inclusion of parameters representative of bedded salt. The benchmark problem extent, geometry, initial and boundary conditions and history will be established from well-documented technical information from existing WIPP literature. Thus far, preliminary benchmark validation efforts suggest that additional characterization of non-salt elements such as anhydrite and clay seam would improve model fidelity. Results from independent calculations will be compared and critically reviewed to assess how well the respective modeling and simulations capture full-scale field response. Continued work on the leading-edge constitutive models will provide the next generation of modeling capability that would then be applied to salt repository design, operations, seal systems, in situ test prediction, and performance assessment.

4.3 US/German Collaboration

In addition to the specific benchmarking discussed above, German and US salt researchers are addressing numerous salt repository issues, both technical and societal. The US DOE offices of Environmental Management and Nuclear Engineering (DOE/EM and DOE/NE) have collaborated on international salt repository research under the auspices of a 2011 Memorandum of Understanding with the German Ministry. Consistent with this agreement, collaboration in laboratory and field testing and geomechanical modeling has advanced significantly [Hampel et al. 2012; 2013]. This work has ensured validated and verified computational capabilities for both bedded and domal salt are being developed and parameterized. In addition to a technical mission, the scope of international collaborations explores public outreach initiatives implemented successfully in other countries to help frame a societal strategy.

International collaboration on salt repository research, especially between the US and Germany builds and reinvigorates previous partnerships.

Recent developments in Germany and the US have renewed efforts in salt repository investigations. On a yearly rotational schedule, workshops including representatives of institutions in both countries have reinitiated collaborations and cooperation on overall salt repository science. Workshops showcase accomplishment witnessed in several areas, such as repository analogue studies [NEA 2014], treatment of uncertainty, granular salt reconsolidation, seal systems, constitutive modeling, thermal effects on mechanical deformation, knowledge archive, a salt underground research laboratory (URL), an international catalogue for features, events, and processes (FEPs) for a salt repository [Freeze et al. 2014]. Progress made on these also contributes to the OECD/NEA *Salt Club* (<http://www.oecd-nea.org/rwm/saltclub/>). Close technical ties with the international nuclear waste disposal community allow the US salt repository program to capitalize on research being supported by other countries and to develop and have at its disposal the best salt repository capabilities in the world. The scope of these initiatives advances our nation's international repository position by leveraging collaborative salt science at favorable return on investment.

4.4 Lessons Learned from the VSG

In Germany, salt domes have been discussed as possible sites for a repository for heat-generating radioactive waste since the 1960s. As a candidate site, the Gorleben site located in Northern Germany has been investigated since 1979, at first from the surface and since 1986 from underground, when shaft sinking started [Bornemann et al. 2011]. The investigations were ceased between 2000 and 2010 based on an agreement between the German Government and the electric utilities. In 2010 site investigations were resumed and the preliminary safety assessment for the Gorleben site [VSG] was completed.

It should be noted the Project VSG is not intended as a safety demonstration for a possible later licensing procedure, which is still required by the Atomic Energy Act. Rather the objective was to prepare a comprehensive safety analysis for a salt dome with focus on long-term safety. An important part of work was also the identification of needs for future research and development and possible additional Gorleben site investigation. With elaboration of an overall synthesis the project ended in an orderly manner in 2013. A short project overview was given by Bracke and Fischer-Appelt [2013]. The complete reports (written in German) are available from GRS [2012].

The salt dome is 4 km wide and nearly 15 km long. It is composed of different salt rock types of the Zechstein (Upper Permian) series and extends to a depth of more than 3 km (Figure 4.4). As shown by Bornemann et al. [2011], in the course of the salt dome formation the salt was moved and uplifted several kilometers resulting in extensively folded, complex internal structure. During the uplift competent anhydrite layers were broken to isolated blocks. In the core of the salt dome the Hauptsalz forms a homogeneous halite body with a volume of several cubic kilometers. Contemporaneous with the diapiric movement of the salt, the effective stresses repeatedly fractured the rock salt and then healed it again, due to its high creeping capacity. This caused the Hauptsalz to become homogenized into a mixture in which blocks of primary rock salt crystals and shredded anhydrite fragments float in a matrix of recrystallized rock salt. Thus in the central part of the Hauptsalz no lithological or stratigraphical discontinuities such as bedding exist.

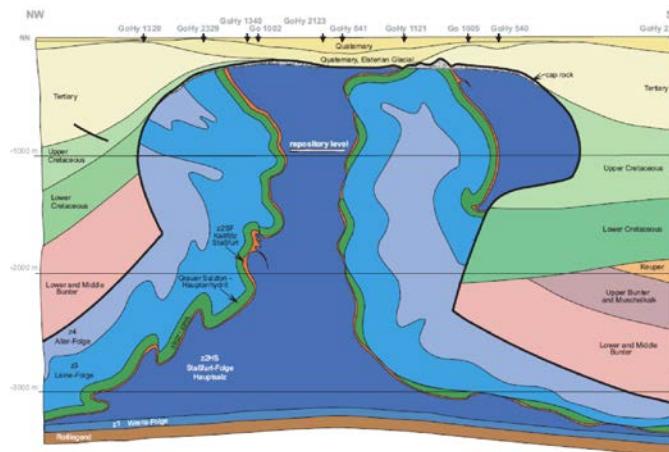


Figure 4.4. Simplified NW-SE geological cross-section of the Gorleben salt dome.

The Hauptsalz contains small amounts of gaseous and liquid hydrocarbons in separated zones of decimeter to meter dimensions. Brine reservoirs with fluid volumes in the range of liters to hundreds of cubic meters exist in certain regions of this part of the salt dome. The average water content of the Hauptsalz is below 0.02 %. Interconnected pores do not exist in the salt rock outside of fluid bearing or fractured area, i.e., the salt rock is impermeable.

Following the German safety requirements, released in 2010 by BMU, initially, a safety concept and a concept for demonstrating long-term safety were developed, that provided the basis for the design of the repository and the safety assessments performed in the Project VSG. Based on the safety concept specific requirements were derived concerning the site, the repository concept, the design of the mine buildings and the assessments to be performed within the Project VSG. The requirements concerning the site have to be fulfilled by the characteristic properties of the host rock and the overall geological situation. The main objective of the disposal is to contain the radioactive waste inside a defined rock zone, which is called containment-providing rock zone (EWG). The radionuclides shall remain essentially at the emplacement site, and at the most, a small defined quantity of material shall be able to leave this rock zone. This shall be accomplished by the geological barrier and a technical barrier system, which is required to seal the inevitable penetration of the geological barrier by the construction of the mine.

The repository is planned in a depth of 870 m below surface and will have a maximum length of approximately 4 km and a width varying between 300 m and 700 m, according to the geology and depending on the emplacement concept. An overview about the technical design of the repository and the detailed design of the geotechnical barriers is given by Bollingerfehr et al. [2013]. In addition to special designed engineered barriers (e.g., dams made of MgO-concrete), implemented in the drifts at selected locations and in the shafts, backfill made out of crushed salt is the main technical long-term barrier. The backfill compacts due to the convergence of the surrounding rock thereby sealing the backfilled drifts. The estimate for the minimum porosity that the backfill can achieve is $1\% \pm 1\%$. Since moisture accelerates the compaction of backfill, slightly moistened backfill is emplaced in the main drifts (0.6 wt-% moisture).

According to the objective of safe waste containment, a crucial part of the Project VSG was to analyze the integrity of the geological barrier in order to determine whether stresses, which occur over time as a result of the forecast behavior of the geologic repository system, could violate the integrity of the barrier over the specified verification period. In other words, it was necessary to investigate whether the properties of the geological barrier forming the effective isolation system are maintained over the verification period. The geomechanical integrity analysis was jointly performed by the Federal Institute for Geosciences and Natural Resources (BGR), Hannover, and the Institute for Geomechanics (IfG), Leipzig, [Eickemeier et

al. 2013], considering two concepts: (1) the emplacement of Pollux casks in drifts and (2) the emplacement of BSK3 fuel element canisters in boreholes [Kock et al. 2013]. Both institutions used different material models, whose parameters were derived from site-specific investigations, according to the different rock units as illustrated in Figure 4.4.

To assess the barrier properties of rock salt layers under the influence of thermo-mechanical effects associated with the release of heat in the emplacement zone, computer simulations are carried out on the geomechanical processes which give rise to the creation of micro-fractures due to mechanical damage or fluid-pressure-driven opening up of grain boundaries. Understanding this process is important because the migration paths created in this way could ultimately cause liquids to penetrate the emplacement zone. This conceptual procedure means that the assessment of the hydraulic barrier properties is undertaken on the basis of mechanical parameters. This involves the use of the dilatancy criterion and the minimal stress criterion as proof of the BMU-safety requirements [BMU 2010] according to the two well-known mechanisms of hydro-mechanical integrity loss:

- deviatoric stress induced growth and connection of intercrystalline and transcrystalline cracks, which is assessed by the dilatancy criterion
- fluid pressure driven crack and grain boundary opening and their interconnection, which is assessed by the minimum (or fluid) stress criterion

2D models (IfG) and 3D models (BGR) were used for the thermo-mechanical calculations, illustrating all relevant loading conditions at different scales, i.e. in the proximal field in the emplacement zone (near field), including the drifts and emplacement containers, as well as to investigate the thermal effects on the salt dome as a whole (far field).

The realized integrity analysis clearly documents the high level of safety analysis based on geomechanical modelling demonstrating the requested geological barrier integrity for the site Gorleben for at least one million years. Additional studies on liquid and gaseous transport of radionuclides [Kock et al. 2013] confirm that the compaction behaviour of crushed salt backfill is one of the most relevant factors for the hydrodynamic evolution of the repository and the transport of contaminants.

Focusing on the geomechanical integrity, future safety analyses should involve more detailed investigations on the pressure-driven infiltration of fluids, e.g., along stratigraphic boundary horizons (bedding) within salt rock masses or zones where the integrity criteria are not fulfilled. Coupled THM calculations on fluid infiltration into the barriers (both geological and technical) require further developments of appropriate numerical tools supplemented by a comprehensive experimental data base, e.g., about discontinuities acting as mechanical and hydraulic weakness planes.

4.5 Geomechanics Going Forward

US scientists continue to cooperate with international peers to establish the integrity of salt repositories. Although a strong basis for salt disposal exists, analysis tools can be improved and updated, special studies to reduce uncertainty can be championed, and process improvements are always possible. This section stresses geomechanics issues, while recognizing importance of societal, stakeholder, operational, and regulatory input to the licensing processes. Confidence toward licensing a salt repository is couched in many instances by our deep understanding of the geomechanical behavior and our ability engineer safe systems.

The Joint Project III [Hampel et al. 2012; 2013] provides a prime example of updating analysis capabilities, which can applied to a salt repository for heat-generating nuclear waste. The best available constitutive models and computational methods provide the tools for next generation of design, analysis, operations, sealing, and performance assessment. New testing of WIPP salt coupled with existing data from bedded and domal salt allow for timely assessment of generic differences and similarities as regards

repository geomechanics. A compendium that compares and contrasts bedded and domal salt as applicable to repositories would be beneficial for US and international salt repository programs.

The Project VSG represents a milestone of extended German research activities aiming toward establishing an underground repository for heat-generating radioactive waste in domal salt formations. The outcome provides convincing results demonstrating not only the highly developed level of safety analyses, but also supporting the general assumption of suitability of salt formations. A homogeneous halite body with a large enough volume was identified as possible host rock unit. The occurrence of fluid inclusions (brine or locally hydrocarbons) of Permian age confirms tightness which was preserved over geological time scales. As major part of the safety analysis the geomechanical modeling demonstrates the integrity of the salt barrier under consideration of likely and unlikely load conditions, especially with respect to heat-generated effects. The overall synthesis confirmed the adequacy of the approach, indicated the compatibility with the German safety requirements, and allowed the interpretation that there are no findings which actually contradicted the suitability of the location. In the VSG report on future R&D, open questions were addressed, i.e., concerning the integrity criteria. This confirms the need for development and improvement of advanced numerical tools for coupled hydro-mechanical calculations of pressure driven fluid transport in the salt mass (and the technical barriers). In addition, crushed salt backfill compaction was identified as one of the most relevant factors for the hydrodynamic evolution of the repository and the transport of contaminants.

Granular salt is likely to be used in the mine design for repository applications to provide structural support and other operational functions, thus reconsolidation processes and properties as a function of porosity continue to be key areas of ongoing research. Analogue evidence of reconsolidation to conditions that mimic native salt is substantial and supports the proposition that granular salt becomes effectively impermeable under many conditions. Owing in part to difficulty in measurement, uncertainty remains concerning flow behavior at very low porosities. Because characteristics that approach undisturbed salt are desired for many repository safety functions, demonstration is potentially more influential in the licensing arena than is model prediction of performance. Repository functions of granular salt can be advanced via analogue studies, evaluation of low porosity characteristics, and enhanced engineering performance attained by additives to the crushed salt. Until recently, most backfill research and design used run-of-mine crushed salt without additives such as bentonite. Evidence suggests that performance characteristics could be improved with admixtures that enable placement at greater density with lower initial permeability and porosity. This engineering achievement reduces uncertainty and perceived reliance on modeling. Repository designs, analyses and performance assessment for heat-generating waste will hinge on our state of knowledge concerning reconsolidation of granular salt.

A salt repository for heat-generating waste should take advantage of experience gained at WIPP, Project VSG and elsewhere. Rooms can be designed structurally stable to minimize geotechnical ground support. Forward looking engineering and performance assessment is likely to require intrinsic modular closure, which will no doubt include drift seal elements comprising reconsolidated granular salt. A recurring debate is the prerequisite that seals need to be demonstrated at full scale. In principle this can neither be attained in any reasonable time nor can the functionality be monitored. On the positive side, multiple construction demonstrations of various seal elements have been completed. In addition to crushed salt, the other most important engineering materials are concrete and bentonite. Looking forward, salt repository collaborators should consider compiling seal-system information into a document nominally called *A Synthesis of Salt Repository Seal Systems*. Such a jointly authored state-of-the-art report could include reconsolidation analogues, experience with bentonite and performance of special concretes. In the meantime, tests with admixtures are further enhancing the database.

A generic description of the evolution of the underground setting expounding upon geomechanics highlights as identified in this section would be of utility for analysts new to the field. The scientific community has firmly established knowledge of salt underground workings that should be recognized by modelers new to the field. Perhaps it would be useful for US and German collaborators to write another

position paper that describes the evolution, properties and mitigation of the salt DRZ. Creation of a DRZ in salt is well recognized and for many engineering purposes sufficiently understood to provide confidence in its forward evolutionary characteristics and its mitigation through healing processes. However, quantification of anisotropic permeability associated with damage levels is elusive. Time-wise healing has little full-scale documentation aside from bulkhead (dammjoch) measurements being modeled in the Joint Project [Hampel et al. 2012; 2013]. It will be mandatory to close a repository; therefore, it is essential to establish that it can be sealed by appropriate and integrity-proven seal systems, including both shaft and drift settings. Fruitful collaboration is ongoing in the US/German workshops.

Salt remains a well characterized material for waste isolation. However, the future path is projected to be very long. The US repository program has identified a goal of 2048—and the German future repository policy is embarking on a review of the site selection process. Considering the very long times projected before a salt repository site is established through a new consent-based negotiated-consultancy siting process, it may be worthwhile for the established salt scientists to write a geomechanics salt repository primer that documents fundamental concepts. Such a book would be useful today as a means of knowledge preservation and for education purposes for the next generation of salt repository scientists and engineers.

5 A URL IN THE CONTEXT OF SALT DISPOSAL RESEARCH

Given the long history and encyclopedic information that underwrites salt repository science, what is the role for a URL at this stage? Salt disposal research provides many of the building blocks for licensing a salt repository. The question pursued in this section is twofold: Does URL testing reach a high priority in today's salt research, development and demonstration program, and if so, how are URL tests to be evaluated and prioritized? As of today, neither the US nor any other country has an operating URL in salt. It is widely believed that further salt testing in a URL is not required to address a perceived technical deficiency to be answered as a prerequisite to preparation of a safety case for salt disposal of heat-generating HLW. The technical basis for salt disposal provides strong and pervasive evidence that radionuclides in a salt repository will not migrate from the disposal horizon. Current knowledge of thermal effects supports viable concepts for disposal operations and underground evolution. The suitability of salt as a disposal medium has been recognized by national and international repository programs. Therefore, the scientific community must balance perceived necessity for field experiments with the recognition that a very strong scientific basis already exists for salt disposal of nuclear waste.

The essence of this section will be prepared as an external publication [Hansen 2015], which sets forth principles as well as a methodology for evaluating proposed URL activities. Because field testing is costly, any such test will necessitate commitment of money and time. Given the vast and compelling basis for successful waste isolation in salt, a choice to perform field-scale tests must be based on merit and a tangible connection to the Safety Case. Scientific investigations to support a license application are broad in scope, including laboratory tests at ambient and elevated temperature that characterize such properties as salt creep, the potential for fracture damage and its mitigation, permeability functionality of seal system components, brine accessibility via induced damage, chemical conditions in the disposal environment, and a host of other primary properties pertaining to performance assessment. The general goals for any future site characterization and laboratory or field investigations should build upon earlier work to reduce uncertainty and to enhance the safety basis for salt disposal. This document briefly discusses characteristics and modeling pertaining to waste disposal in salt with the intent to assess how a salt URL fits into the research agenda.

How then will decisions be made for potential URL activities within a focused salt repository R&D program? In this section, guidelines are put forward that outline a review and prioritization process for large-scale underground testing. Implementation principles include analysis and justification for generic testing or demonstration activities that meaningfully address technical issues in a credible manner. Implementation of demonstration and confirmation activities, integrated with other beneficial uses, could

help establish an expected precondition for public and political acceptance of salt disposal of heat-generating nuclear waste.

5.1 Discussion

In-depth explanation of salt attributes for permanent disposal of heat-generating waste can be found in Hansen and Leigh [2011] and on the SNL website for US/German collaboration (http://energy.sandia.gov/?page_id=17258). A brief review of these characteristics will help clarify the foundation from which salt repository research proceeds. Long-term behavior of salt, fundamental to repository applications, requires detailed understanding of deformational processes, such that extrapolation can be made beyond human experience.

The scale of research to date ranges from a microstructural level to full-scale demonstration in the underground. Under most conditions involving elevated temperature and modest confining pressure, salt deforms plastically. The phenomenon of flow without fracture (isochoric creep) is one of the attractive attributes of salt as a disposal medium. Advanced constitutive models in the US and Europe have been used to describe phenomena associated salt deformation and their dependence on different fundamental mechanisms. These constitutive models are currently being benchmarked in ongoing international collaborations. Advanced modeling capability provides a dual purpose for field testing—modeling can be used to design test configurations at the outset and subsequently validated by test results. Regardless of proposed field activity, structural mechanics modeling has a role in defining the test bed.

Laboratory investigations in Germany and the US have provided the background understanding of salt mechanical and thermomechanical responses to anticipated repository conditions. Temperature has a dramatic effect on salt deformation and, therefore, temperature and associated heat management are first-order concerns for disposal of heat-generating nuclear waste in salt. The importance of heat from radioactive decay depends on the effects that the induced temperature changes could have on mechanics, fluid flow, and geochemical processes within a salt formation.

Salt deformation in the laboratory and in the field can be accompanied by significant fracturing at room temperature, low confinement, and relatively high differential stress, conditions that occur near free surfaces of the repository openings. Under these conditions salt exhibits a measure of brittle deformation near the roof, floor and ribs, but deforms by constant volume processes at depth within the rock formation. The properties that typically define the DRZ include (1) fractures ranging from microscopic to readily visible scales, (2) loss of strength evidenced by rib spall, floor heave, roof degradation and collapse, and (3) increased fluid permeability via connected porosity. Extant DRZ characteristics define boundary conditions for activities conducted within the excavated space. The general setting evolves with time and deformation; however, fracture development near excavations occurs rapidly. Evidence shows that damaged salt can heal under certain conditions, which is another important phenomenon conducive to investigations in a URL.

The Joint Project III collaboration, called *Comparison of Current Constitutive Models and Simulation Procedures on the Basis of Model Calculations of the Thermo-Mechanical Behavior and Healing of Rock Salt* started in October 2010 [Hampel et al. 2012]. This project compares modeling capability for temperature influence on deformation and for sealing and healing of damaged and dilatant rock salt. The research group is in the process of benchmarking salt mechanics codes against WIPP field tests, which were conducted during site characterization. The benchmarking study on sealing and healing comprises all phenomena that result from the elastic closure of open microcracks up to the re-establishment of chemical bonding along fracture surfaces. In the constitutive models of the partners, modeling these effects is based on a description of the healing rate as function of the current dilatancy and the stress state. Differences in the models arise from differing assumptions regarding the healing boundary. This phase comprises performance and back-calculation of specific laboratory tests as well as simulations of selected in situ structures. At the conclusion of this collaboration, the benchmarked codes will thereafter provide analysis tools for any possible test or demonstration in a salt URL.

A salt URL could potentially host a wide assortment of tests to confirm our collective (international) knowledge on the technical basis for salt disposal. Consistent with our goals of collaboration, URL space could be used to underwrite internationally significant science and engineering, such as demonstration of sealing elements and DRZ evolution and healing. An ongoing performance confirmation program would be an integral part of a license for regulatory approval of nearly any repository and a URL setting could host an array of performance confirmation measurements associated with safety case arguments. Ongoing science made available by a salt URL holds the potential to reassure societal and political stakeholders. Due diligence also demands ongoing scientific research to confirm the licensing basis, even though the safety case for a salt repository is robust and well substantiated.

5.2 Framework

The opportunity to set out a generic research strategy for salt disposal helps focus objectives, which can be justified in several ways. A test or demonstration might address specific features, events or processes to confirm our understanding and ability to model performance of a deep geologic repository for heat generating radioactive waste in salt. An activity might be proposed to build confidence that the safety functions of a deep geologic repository in salt are understood and can be forecast over regulatory time periods. A URL activity might be identified by consensus of international collaborations. Many test concepts pertain to design and operational practice, which embody model prediction and confirmation at full-scale. These particular objectives align with similar lists put forward by the International Atomic Energy Agency [IAEA 2001] and Nuclear Energy Agency [NEA 2013], which also point out the benefit of training and education of the next generation of scientists. Many objectives taken from the literature are intertwined and expressible in different descriptive forms. For example, *addressing FEPs* essentially means the same as *assessing performance of the repository system*. Building confidence by reducing uncertainty is a well-recognized basis for field testing. International collaboration is a goal and perhaps a strong justification for investing in a field activity of mutual interest.

Development of proposed testing activities will benefit considerably by integrating information from Performance Assessment into the planning and prioritization of science and engineering activities. The Performance Assessment methodology uses a hierarchy of upper tier requirements that drive data requirements to support safety case development. This structured framework can be used to prioritize activities and transparently communicate up-to-date understanding of the repository safety case. Information within Performance Assessment calculations can readily identify the nature and potential impact of remaining uncertainties, which provide measures of perceived benefit to be realized by testing. Fundamentally, activities to be undertaken in a salt URL would require justification on an objective basis, one of which is impact on Performance Assessment.

Given broad descriptions of objectives, how can various URL ideas be rated and evaluated? What process is available to differentiate and select URL activities? A commitment to pursue URL testing must be predicated on a structure to weigh relative merits of proposed activities. This process basically describes a simple progression from concept development to evaluation and selection in the following order:

1. Describe activity
2. Conduct independent review
3. Rank and prioritize
4. Make recommendations
5. Select, plan and budget

The framework concept is quite simple: describe proposed URL activities and assemble a small independent review panel to evaluate merit. A framework for conduct of URL studies facilitates objective, rigorous, and transparent science. With strategic planning, investigations conducted in the underground can address a number of salt-based disposal issues while supporting generic salt studies. If

undertaken with a view toward the future, operations within a URL could become a national and international centerpiece for salt repository research. Involvement of the international community would add scientific credibility and further strengthen stakeholder confidence. Operating a URL should allow participation by the next generation of students and nuclear waste management scientists through provision of a unique laboratory for basic and applied model development, laboratory testing, and field investigations.

5.3 Use of the URL

There are many potential uses of a salt URL, so it is essential to have a process to evaluate and prioritize. Furthermore, a long-term view of URL functions is vital to assess dual-purpose synergy, test-to-test interference, data acquisition, and infrastructure. Although a URL would focus on issues related to nuclear waste disposal, the overall portfolio would also include repository design and operation issues that can be isolated from heat effects, such as engineered barrier construction.

The idea of salt disposal, as well as disposal in other media, was restarted after the Yucca Mountain Project was declared unworkable in 2008. Concepts to reinvigorate salt disposal investigations were also outlined at that time, including a sequence of laboratory testing, benchmark modeling, international collaboration, and field testing. Description of several large-scale tests and demonstrations has been published [Hansen 2013]. In addition to a series of public manuscripts describing possible tests within a salt URL, the US/German Workshops on Salt Research, Design and Operation examined a suite of the proposed URL activities. International collaborations between US and German researchers has availed the possibility to review and discuss various salt URL test concepts. At the 4th Workshop potential URL activities were reviewed, including those previously identified in the literature as well as some new ideas. Workshop participants were asked to provide high-level review and feedback concerning a sense of duration, cost, and merit among several potential activities. Physical phenomena such as thermally driven creep processes or damage healing also require relatively large scale and time-dependent evolution. Considering there is no salt URL operating in the world, salt repository programs are in a position at this time to reflect deliberately upon the matter of a URL in the context of an overall research, development and demonstration agenda.

A variety of approaches can be taken toward grouping field tests in terms of information to be obtained. For example, seal system testing could involve excavation, short term DRZ evolution, concrete placement and DRZ healing. Thereby operational construction issues, model validation, first-order properties and confirmation could be integrated into one sealing demonstration. Tests could be grouped in relation to expected phenomena, such as thermally driven processes. In turn, the thermally driven processes could be ramped up from relatively low temperatures and low areal thermal loading applicable to a certain waste inventory to high temperatures associated high-burn-up used fuel. In each case, the technical basis (justification for the activity) would be different. Tests may be grouped with respect to degree of difficulty or complexity and evaluated based on cost-versus-benefit analysis. International experience in salt and other geologies provide further insights into the proper design and operation of URL research programs for maximum utility. There are many possible uses of a salt URL, which highlights the need for review and consensus [Van Luijk 2013].

5.4 Concluding Remarks on Salt URLs

The viability of salt formations to host a nuclear waste repository has been well established. Therefore, a salt repository program does not require a field-scale disposal demonstration to resolve an unknown technical issue before a license application can be prepared. This conclusion is based on a wealth of scientific information that supported both the WIPP compliance certification and the preliminary safety case for Gorleben. The former is in bedded salt and the latter in domal salt. Sufficient technical backing has therefore been demonstrated to produce a license application for a salt repository for heat-generating waste if US policy is set in that direction. On the other hand, if confirmation or demonstration of

performance expectations is felt to be essential for public acceptance, then it is possible that confirmation testing or disposal demonstrations could be developed to address such a societal prerequisite. The use of a salt URL could also signal that the repository program for salt disposal is committed to performance confirmation.

Examples of field testing and engineered barrier construction could further demonstrate existing ability to seal a salt repository. The state of international repository research, design and operation has been discussed and published in several annual workshops between US and German researchers. International collaboration continues to advance the basis for salt disposal, with exceptional modeling of WIPP Rooms B&D and many new laboratory tests on WIPP salt. Within the context of salt R&D, the proposition of a salt URL requires justification and establishment of merit in an objective and open implementation framework. Given the likely programmatic outlay in terms of time and money, a careful assessment of the return on investment is imperative. Therefore, a framework for implementation has been provided to guide selection of the most promising uses of underground space.

A URL in salt would provide opportunities for advancing identified US/German research interests and university outreach. Collaboration with Germany and other nations with salt disposal interests (The Netherlands and Poland) would help assure credibility of proposed URL activities and could promote partnering on certain ventures. No matter what activity is selected for the URL, new excavation provides a test bed for measuring evolving formation properties before, during and after the openings are made. Advanced planning allows modeling prediction of deformation and changing permeability. Pre-test characterization sets up a code validation/confirmation exercise in the process of defining boundary conditions for tests involving excavations, which is elaborated upon in the next section.

6 CAPTURING EARLY EVOLUTION OF SALT OPENINGS

The bulk of this section will be presented and published at Geomechanics Conference of the ARMA [Hansen et al. 2015]. Salt formations hold many favorable characteristics that combine to make them promising sites for permanent waste disposal. Salt formations are plentiful in the US, providing ample areal extent and substantial thickness in aseismic geologic settings [Johnson and Gonzales 1978]. In addition to high thermal conductivity and plastic deformational response, undisturbed salt has extremely low permeability. Some of the favorable characteristics are modified during the excavation process and evolve during operations. If experiments or operational demonstrations are conducted in a salt underground research facility, rapid changes to the preexisting conditions create a new setting in the test bed. The DRZ near the excavation free surfaces provides access to formation brine in bedded salt and becomes an anisotropic, high-permeability region. Depending upon objectives, liberated brine can significantly influence evolution of the test bed. In addition, transient creep strain accumulates rapidly, but is usually not measurable because the rock mass would have to be instrumented before mining occurs. Therefore, potentially large strain accumulation in the salt formation can be overlooked. To model salt deformation completely, an accounting of the transient creep contribution is needed. Fortunately, evolutionary characteristics of salt are well known and straightforward engineering measures can be made to quantify early evolution, which allows the experimentalist to understand and mitigate deleterious effects.

Investigations that utilize a mined salt formation for experimental activities would benefit greatly from the knowledge of initial, undisturbed conditions, the evolutionary changes imparted by excavation, and the boundary conditions extant when field activities are undertaken. Here we describe the essence of a Test Plan to quantify conditions before space is opened and to measure the evolution of displacement, strain, damage, and permeability that occurs during and after excavation. Testing of this nature would support virtually any type of field demonstration or test that involves room-scale excavation in a geologic salt formation. Test methods are adaptable to essentially any configuration. In order to demonstrate the monitoring concepts, a hypothetical test configuration has been assumed.

At this point in salt repository collaborations, neither the US nor Germany has a salt URL. However, the concepts put forward here would be applicable in any salt formation, bedded or domal in the US or in Germany. In addition the particular size, length and geometry of the excavation are assumed for purposes of displaying this test strategy. The host-rock characterization program begins from a minimally disturbed state where instrumentation is installed at the periphery of test rooms *before* room mining begins. After mining begins, changes are measured as stresses are redistributed and damage processes ensue.

The primary approach for characterizing the DRZ is by use of fluid-flow test boreholes and injecting gas or brine in the areas of interest where mechanical changes occur. This testing program will make deformation and fluid flow measurements at similar locations so that unambiguous correlations can be established between rock deformation and permeability changes. The arrangement of instrumentation and measurement techniques allows establishment of initial (undisturbed or minimally disturbed) conditions, capture of the rapid transient response, and evolutionary monitoring as the salt creeps into the room. Measurement of mechanical response coupled with hydrologic changes establishes boundary conditions for any test or demonstration that might be conducted in the excavation.

An underground research facility in salt provides an opportunity to measure undisturbed permeability, which is expected to be almost immeasurably low. Such a measurement would confirm this widely recognized salt property. Excavation perturbs the stress state and the static salt formation begins to deform into the opening. The process of mechanical deformation creates fractures in the proximity to the openings. Fracture damage creates a permeability that did not exist before, and the accessible brine moves down the hydrologic gradient toward the opening. Some of the brine reaches the walls of the opening and is evaporated by ventilation air. Some of the brine remains in the DRZ and flows by gravitation into void space created in the floor region by flexure. The brine below the floor would continue to flow down the geologic slope of a bedded salt formation. The creation of the DRZ and its geometry and properties, as well as the availability of brine and its fate create initial boundary conditions of the site regardless of the technical purpose for which an excavation is used. These fundamental properties of the salt formation can be predicted by calculation, monitored for confirmation, thus validating the computational simulation.

6.1 Salt Behavior

To explain the testing strategy, some assumptions of the configuration are necessary, mindful that the philosophy, evolution, and measurement concepts are adaptable to essentially any reasonable opening geometry. The surrounding stratigraphy is predominantly halite, though bedding layers of clay and anhydrite are common and will be included in discussions here.

Mechanical deformation of the rock in a salt formation surrounding excavations controls the development of *initial* or *boundary* conditions for subsequent experimental work in the drifts. Geomechanical deformation comprises instantaneous elastic deformation, rapid transient creep, dislocation creep, and damage imparted to the host rock under certain stress conditions. Combined, these processes can be quantified through observations of deformation rates, finite displacements, and characteristics of the DRZ.

6.1.1 Geomechanical Measurements

Testing techniques proposed have been used previously in salt applications and can be considered generic. The instruments would be arranged around a to-be-mined drift configuration appropriate for geologic waste disposal. Testing and monitoring include primary measurements of deformation, strain rate, and brine and gas flow and secondary measurements of temperature and barometric pressure.

Salt creep has been extensively measured and characterized by US and German salt repository programs and other salt-based industries (e.g., salt and potash mining). Crystal plasticity is isochoric; therefore, it does not induce damage to the salt matrix. Damage occurs when the deviatoric (i.e., shear) stresses are relatively high compared to the applied mean stress. Salt damage manifests through time-dependent

initiation, growth, and coalescence of microfractures. These processes lead to a bulk dilation of the affected rock, increasing the porosity and permeability of the salt to brine and gas flow. The extent of the DRZ surrounding mined salt openings has been measured directly at WIPP and elsewhere using techniques such as sonic velocity, brine and gas flow properties, and laboratory analysis of cores. Point geophysical measurements have validated the geometry and rock properties predicted by numerical damage models. These features and their measurements are discussed subsequently.

6.1.2 Room Closure

The test configuration described here would confirm the geophysical response of the test bed before, during and after the mining of the testing drifts. The bases for these proposed measurements draw from principles of salt deformation. A structural model prediction has been run to provide guidance for instrumentation placement. The calculation is based a salt-creep constitutive model that tracks stress/strain history of the host rock. Expected results from the structural calculation can be supplemented and corroborated by taking advantage of extensive database of geotechnical measurements made in connection with actual operations in salt. Classical strain-time behavior for salt includes rapid transient deformation that slows to a pseudo steady-state as substructure evolves with time. Model simulations can be used to provide a more complete deformation history, including hard-to-collect early-time data. Modeling results can be analyzed to include continuous predictions of DRZ extent and absolute displacement quantities.

6.1.3 Damage Evolution

Development of the dilatancy boundary represents an ongoing pursuit of German and US salt research scientists [Schulze et al. 2001]. A more sophisticated treatment of DRZ development would be expected for analyses of an actual URL test. For exemplary purposes we use a simple relationship relating volumetric strain and principal stresses [Van Sambeek et al. 1993]. Stress states that resulted in net volume increase (damage or dilation) were defined in terms of the first invariant of the traditional Cauchy stress tensor, I_1 , and the square root of second invariant of the deviatoric stress tensor, J_2 . These invariants are related to mean (or confining) stress and deviatoric stress, respectively, and a clear delineation in the $I_1 - J_2$ stress space exists between conditions that cause dilation and those that do not, regardless of the type of salt or type of test considered. A simple empirical relationship separates dilating stress states from nondilating stress states expressed as

$$\sqrt{J_2} = 0.27I_1$$

This relationship is called the stress-invariant model and is used in this analysis.

Measurements of the DRZ around openings in salt have been made using various geophysical techniques. Predictions of the one-way evolution of the DRZ without subsequent long-term salt healing replicate geophysical observations. The size and shape of the DRZ around an opening based on a stress-invariant criterion are comparable to the size and shape derived from sonic velocity studies and from microscopy of core damage.

6.2 Structural Analysis

Results of the ongoing Joint Project collaborations should identify the best-available tools for structural analyses. Geomechanical model predictions should be integral to field test planning because they demonstrate that the experimental concept has been thought out, while calculations help clarify boundary conditions likely for the field test. Placement of gauges before excavation permits evolutionary measurements that can be predicted using a variety of models. Subsequent accomplishment of the test provides an opportunity to validate predictions. Predicted response coupled with practical experience provide the bases for instrumentation range, accuracy, and data quality objectives (DQOs), which quantify needed precision and accuracy based on how the measurement applies to safety functions.

6.2.1 Geomechanics Modeling

For illustrative purposes, a preliminary two-dimensional isothermal structural analysis of a proposed mine-by test has been performed [Holland 2014]. The primary reason for the calculation is to determine the extent of the damage zone around a potential test drift and to aid in the design and placement of instrumentation. If such an excavation is actually made at some future date, it would provide an additional opportunity to validate these calculations.

The finite element model used for this example represents a two-dimensional cross-section passing through the mid-length of a nominal test drift. A two-dimensional geometry was chosen for this example because the analysis was time-and-budget limited. A full three-dimensional model would more accurately represent a particular configuration. Material layering used in this example simulation is based on WIPP Room D stratigraphy, which can be considered typical for bedded salt. A final test location with site geology and mining sequences should be used to develop a three-dimensional geomechanical model of the actual area, especially since the purpose of this effort is to quantify damage of the salt and development of the DRZ surrounding test drifts.

6.2.2 Results

Geomechanical modeling can predict microfracturing using the stress-invariant criterion provides a tool for pre-test calculations of the test room conditions. The ratio of the square root of the second invariant of the deviatoric stress tensor (J_2) and 0.27 times the first invariant of the stress tensor (I_1) can be used to outline a zone with a *Damage Factor* > 1 , as shown in Figure 6.1. This plot is a snapshot at 887 days, though the damage factor contours can be calculated at any time. Multipoint Borehole Extensometers (MPBXs) can now be situated to straddle the predicted extent of the DRZ using this type of information.

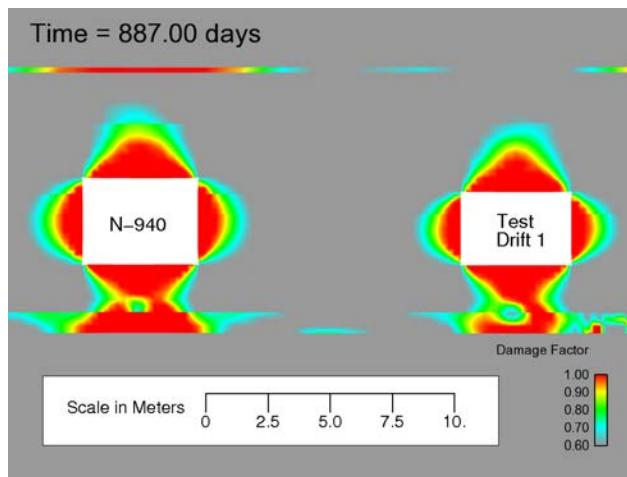


Figure 6.1. Damage contours from Geomechanics models.

To provide an estimate of the temporal change in the displacement field between the drifts a horizontal line of displacement probes is assumed between observation drift (N-940 in the example) and Test Drift 1 as shown in Figure 6.2a). Time histories of the horizontal displacements at these nominal locations are shown in Figure 6.2b). A positive value of the displacement means the probe location is moving toward the test drift excavation. In this simulation, the probes are installed soon after excavation of observational drift N-940. At first, all probe locations would be moving toward N-940. The kink in the displacement history curves occurs when the test drift is excavated.

Based on these calculations, the extensometers range and accuracy can be specified. For example, an anchor could be set at 0.5 m from the new excavation wall, with a measurement range of 0.10 m (double the expected displacement). The outer anchor would be set at about 5 m, which is approximately neutral

between the two drifts. Displacement precision should be approximately 0.001 m (1 mm), which is 1% of range. Off-the-shelf extensometers are typically more sensitive than ± 0.001 m. Final arrangements and gauge selection would be determined by the Principal Investigator, but this example shows how the prediction can assist with DQOs.

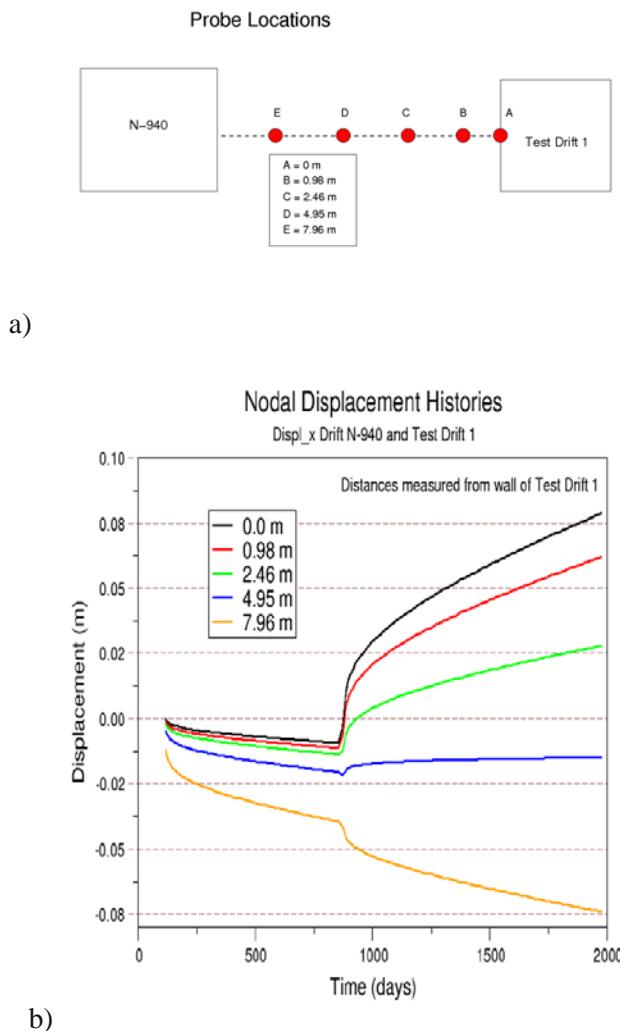


Figure 6.2 Displacements as a function of position between observation drift and test drift.

Temperature and mechanical deformation measurements will be collected at like locations to enable data collection for thermal-expansion compensation of the extensometers. Final design depths, ranges, and DQOs would be aided by final test site selection and preliminary geomechanical model predictions.

6.3 Permeability Measurements

Permeability testing boreholes would be situated in the expected DRZ. The combination of MPBX measurements strain and fluid testing will generate data to allow a correlation to be made between a 1-D stain level and a fluid flow potential. Intact geologic salt is essentially impermeable to brine or gas flow (permeabilities $<10-20 \text{ m}^2$). In its undisturbed state, the intergranular porosity of intact salt is quite low (~1%), unconnected, and filled with saturated brine. Pressure within occluded pores would be equal to

lithostatic pressure. Interconnected porosity, which can be created by salt dilation, is required to allow brine to flow under a stress or pressure gradient.

Once the changes to the porosity, intrinsic permeability, and brine saturation have occurred, brine flows into the DRZ under the influence of gravity, pressure, and capillarity. This redistribution of brine is slower than the initial mechanical response of the system, which creates the DRZ and largely air-filled zone surrounding the excavation.

Depending on the method used to characterize the DRZ, it typically develops from 1-2 meters up to one excavation “radius” into the host rock. Characterization of the DRZ provides concrete information regarding the initial and boundary conditions for the drift. The DRZ can act as a source, sink, and pathway for brine and vapor moisture. Characterizing the spatial extent and temporal evolution of the DRZ around excavations provides boundary conditions for any of the proposed experiments.

6.3.1 Gas Flow

Laboratory and in situ testing programs at WIPP have characterized both brine and gas flow through the DRZ [Freeze et al. 1997; Beauheim and Roberts 2002]. In general, gas flow measurements are simpler to conduct in areas where the air entry pressure is low enough (i.e., the DRZ), and provide a good diagnostic for delineating the extent of the DRZ. Estimates of DRZ extent and shape from gas flow measurements are qualitatively similar to those estimated from geomechanical model predictions and cross-hole sonic velocity measurements. Gas flow rate can be measured at a specified working pressure, into a short packed-off borehole interval. The test is relatively quick to conduct, and can be repeated across different intervals to assess the variability of the DRZ along the length of the borehole. Gas flow measurements will be made before during, and after excavation of test rooms to confirm initial absence of a DRZ and subsequently to confirm creation and evolution of the DRZ upon test room mining.

Gas is a non-wetting fluid, and would only displace brine (the wetting fluid) under relatively high pressures when intergranular porosity comprised pore diameters that allowed such displacement. Typical undisturbed salt has a pore structure that precludes gas displacing brine prior to reaching lithostatic pressure. Therefore gas flow measurements will essentially test only the air-filled porosity and relative gas permeability of the DRZ. Residual brine will remain in the DRZ, but this fraction of the porosity will be inaccessible to low-pressure gas. Attempting to make gas flow measurements at the far edge of the DRZ (where porosity is lower and therefore brine saturation is higher) or in areas where brine has flowed back into the DRZ, may result in gas displacing brine, which is a non-linear process that complicates test interpretation. Gas testing will essentially be used to quantify the extent of the DRZ, with some rough quantification damage. High gas flow rates can be associated with macroscopic fractures and bedding separations, often associated with non-salt, relatively brittle materials.

6.3.2 Brine Flow

Brine flow measurements are more difficult to make than gas measurements because brine is more viscous, and in a low permeability media, this contributes to very low or no flow in injection test configurations. Historic testing of brine permeability in boreholes was sometimes accomplished using a complex packer apparatus to minimize tool movement, measure borehole deformation, and accommodate high-pressure long-term tests [Roberts et al. 1999]. Characterization activities proposed here do not envision complex long-term brine flow tests, but will measure brine pressure in boreholes before and after test drift mining. If salt permeability and brine saturation are both high enough, brine pressure is expected to stabilize readily (indicating a meaningful inter-granular pore pressure can be interpreted). When this occurs constant pressure tests will be conducted to estimate brine permeability. But unlike gas flow tests, if a brine flow test interval is too damaged or dilated (high intrinsic permeability but low brine saturation), the shut-in pressure will likely not stabilize, indicating the brine is penetrating significant gas-filled DRZ porosity.

While brine will readily displace gas that is not trapped, the penetration of brine into an air-filled porous or fractured medium is a highly non-linear process. These types of tests would be difficult to analyze with linear well-test solutions developed for either brine or gas flow without significant simplifying assumptions of flow behavior around the borehole.

Interbeds comprising non-creeping minerals typically exist within salt formations. In excavations similar to that proposed for this test configuration, such interbeds become highly fractured due to the extent of the DRZ and brittle material behavior. The Brine Sampling and Evaluation Program (BSEP) conducted at WIPP from 1982 to 1993 included “water table” observations in vertical boreholes in the floor [Deal et al. 1989; 1995]. The BSEP investigations found brine readily flowed into boreholes completed in the marker bed, especially at the intersection of large drifts. Recognizing the connectivity of the DRZ below the rooms, particularly if a marker bed is intersected, brine accumulation could be monitored in vertical boreholes. Based on BSEP experience, a relatively brittle stratum located beneath an excavation will potentially act as a brine collection drain for the test drifts because of its stratigraphic location. Since vertical boreholes provide simple measurement opportunity, short pumping or purging tests may be conducted to estimate permeability of the damaged zone penetrated by these boreholes.

6.3.3 Data Quality Objectives

A quality scientific endeavor is predicated on sound application of the scientific method. This document provides a look forward to an opportunity for characterizing a future test or demonstration activity. Measurements include undisturbed conditions and transient characteristics during and after excavation. We therefore have an opportunity to confirm our understanding of these physical changes, while providing detailed boundary conditions for field experiments. In addition, results of these measurements provide opportunities for validation of modeling techniques.

Because of extensive history in this type of experimental work, both in the US and internationally, the basic material and geologic formation behavior is well known. Undamaged salt is essentially impermeable, while minimal damage (volumetric strains as small as 0.01%) will increase anisotropic permeability by 5-6 orders of magnitude. Reversing the stress state toward equilibrium and simultaneously reducing shear stress will heal salt fractures. Understanding these two processes of creating and healing the salt DRZ has been sufficient for engineering and seal system applications to date. Geomechanical simulations can track the stress state and post-process ratios of stress invariants for the damage contours as shown in Figure 6.1.

Modeling, testing, and measurement methods can be used to characterize a generic test bed in a salt formation. An actionable Test Plan to proceed with the described scope of work would conform to requirements of the sponsoring agency under the provisions of an appropriate quality assurance plan. In this preview, a means to collect relevant information has been presented. Creep deformation and evolution of damage around new excavations in salt greatly alter favorable characteristics of the virgin ground. Investigations and salt characterization, as described here, would provide boundary conditions for any particular test bed. Geomechanics simulation can be used to define DQOs and instrumentation specification, while measurements before during and after the test itself provide data for model validation.

7 CONCLUDING REMARKS

Collaboration between German and US researchers ensures that science and engineering at the state of the art is accomplished. Bringing together the best minds in salt repository research, design, and operation lets us address a wide breadth of subjects and dive deeply into selected issues [Howell 2014]. These sentiments are echoed in the Ministry address by Dr. Pape, which is provided in Appendix B. Mutual benefit is at the nucleus of these modern-day collaborations. Collaborations between scientists of American and German research institutions in the field of radioactive waste disposal in rock salt started in the 1970s and emphasized geomechanics and brine migration at the Asse Mine.

The cooperation activities particularly between researchers of SNL and several German research institutions (German Federal Institute for Geosciences and Natural Resources (BGR), Gesellschaft für Anlagen- und Reaktorsicherheit (GRS), Deutsche Gesellschaft zum Bau und Betrieb von Endlagern für Abfallstoffe (DBE Tech), and Institut für Gebirgsmechanik GmbH (IfG), to name a few) continued and culminated in the participation of SNL in the famous international EC-funded Backfilling and Sealing of Underground Repositories for Radioactive Waste in Salt / Germany (BAMBUS) experiment [Bechthold et al. 2004]. In the year 2000 political circumstances (nuclear phase-out talks in Germany and Gorleben Moratorium) led to a slow-down in salt repository research in Germany. In the US priorities changed as well and salt research was reduced and collaboration between the US and Germany slowed accordingly.

In 2009 policy changes in both countries (e.g., in Germany prospects to end the Moratorium and in the US a move away from Yucca Mountain) gave rise to positive and encouraging motivation for intensified resumption of salt research. Therefore, representatives of research institutions in the US and in Germany took the initiative to renew collaborations and cooperation on overall salt repository science, to coordinate a potential research agenda of mutual interest, and to leverage collective efforts for the benefit of their respective programs. This started in 2010 with the first common workshop on Salt Repository Research, Design and Operation, organized by SNL, DBE Technology, and KIT/PTKA in Mississippi, US.

As witnessed in this and previous Proceedings, this was the beginning of a very productive and successful collaboration. Since then five annual workshops were organized; collaboration in the Joint Project on benchmarking constitutive models for rock salt was pursued and showed impressive results; many common contributions to conferences, workshops and journals were made; participation in EC-projects (MoDeRn) and IGDT-TP activities (Joint Activity on Handling of Uncertainties) were initiated and performed. These workshops also address the fundamental challenges of maintaining and honing their respective current state-of-the-art core capabilities in rock salt repository science and technology.

All these activities were and are in accord with the 2011 Memorandum of Understanding (MoU) between US DOE offices and the BMWi. This MoU represents the umbrella for collaboration and signifies an important acknowledgement of the interest of the responsible authorities in the cooperation, the technical agenda, and the benefits for the national programs. The general issues addressed in the workshops, namely the safety case, salt repository concepts and designs, geomechanical response, groundwater flow and radionuclide transport, geotechnical barriers, and site/host-rock characterization, are scientifically up-to-date. To broaden the central construct of collaborations, flexibility and openness allow treatment of additional topics of arising interest. For example, the issue of operational safety was introduced in the 5th Workshop, serving as a trademark of these collaborations. Another important derivative was initiative to found the OECD/NEA Salt Club to bring together international multidisciplinary scientist working in the field of salt repository research.

Some of the lessons learned so far from the successful cooperation are

- comprehensive knowledge and sound expertise of US and German scientists in various fields of salt repository science and engineering can be applied to the problems defined and guarantee to tackle existing and future challenges
- ongoing activities and scientific results exemplify the benefits of this collaboration and prove the importance of international cooperation
- collaboration helps optimize scarce human resources in joint projects and activities
- duplication of efforts can be avoided in the process of adding value of shared national capabilities (e.g., computer resources, modeling, URL experiments, etc.)
- knowledge preservation, education and training (e.g., involvement of universities)
- different perspectives and diverse perception of identical issues support the finding of solutions
- cooperation with foreign partners (e.g., via the Salt Club, conferences and publications) generates great benefit for the national programs

In view of the future developments in HLW disposal in the US and Germany, especially in view of the Site Selection Act, cooperation becomes more and more important.

Concerning domal rock salt there are still open R&D questions that have been identified as a result of the preliminary safety analysis Gorleben (VSG). Moreover, conceptual questions concerning the disposal in bedded salt are to be addressed in Germany. This effort will draw on the expertise and experience of US researchers because of their extensive work on WIPP salt.

Summing up by referencing Dr. Pape's (BMW) welcome address:

The work that is being done as part of our US-German co-operation is important for us to gain detailed insights into the qualities of rock salt as a host rock and to bring older findings in line with the current state-of-the-art of science and technology. Our countries have similar salt formations, i.e. salt domes and bedded salt, and could use them in similar ways. This geological fact makes the US our most important international research partner on salt rock – and the fact, of course, that your country has excellent expertise in this area. As we address the challenges in hand, Germany will continue to add to its own long-standing expertise on salt rock and share it. Our co-operation makes it possible for both partners to create synergies in our work and thus advance our programs.

Dr. Pape—Welcome Address Excerpt

(Complete Text in Proceedings)

On behalf of the organizers PTKA-WTE, DBE Technology GmbH and Sandia, we would like to make you aware of preliminary preparations for our 6th US/German Workshop on Salt Repository Research, Design, and Operation. At the 5th US-German Workshop held in Santa Fe, September 2014, it was decided to hold the 6th Workshop in Dresden, Germany. The workshop is again jointly organized by PTKA-WTE, DBE Technology GmbH, and SNL.

We have made tremendous progress since restarting collaboration in core research areas of geomechanics, constitutive benchmark modeling, plugging and sealing, and the safety case. Recently we added the important issue of operational safety. We will continue to build on these efforts as we open new areas of collaboration such as hydrologic modeling applied to salt repositories, comparison of bedded and domal salt, and the impact of extended storage. We will entertain related topics such as other country participation, actinide chemistry, and open up to special topics, as appropriate.

8 REFERENCES

- Argüello, J.G. 2014. *Results from the US-German Benchmark Initiative for FY14*. SAND2014-18272R. Sandia National Laboratories, Albuquerque, NM.
- Beauheim, R.L. and R.M. Roberts. 2002. *Hydrology and Hydraulic Properties of a Bedded Evaporite Formation*. Journal of Hydrology, 259(1):66–88.
- Bechthold, W., E. Smailos, S. Heusermann, W. Bollingerfehr, B. Sabet, T. Rothfuchs, P. Kamlot, J. Grupa, S. Olivella, and F.D. Hansen. 2004. *Backfilling and Sealing of Underground Repositories for Radioactive Waste in Salt (BAMBUS II Project)*: final report. European Commission. Directorate General for Research. Office for Official Publications of the European Communities. Call No: EUR 20621 EN.
- Bérest, P., P.A. Blum, J.P. Charpentier, H. Gharbi and F. Valès. 2005. *Very Slow Creep Tests on Rock Samples*. Int. J. Rock Mech. & Mining Sci. V.42.
- BMU (Bundesministerium für Umwelt, Naturschutz und Reaktorsicherheit). 2010. *Sicherheitsanforderungen an die Endlagerung wärmeentwickelnder radioaktiver Abfälle*. www.bmub.bund.de
- Bollingerfehr, W., W. Filbert, C. Lerch, P. Herold, N. Müller-Hoeppen, F. Charlier, and R. Kilger. 2013. *Technical Design and Optimization of a HLW-Repository in the Gorleben Salt Dome including Detailed Design of the Sealing System*. WM2013 Conference, Phoenix, AZ, USA. No.13305.

Bornemann, O., J. Behlau, R. Fischbeck, J. Hammer, W. Jaritz, S. Keller, G. Mingerzahn, and M. Schramm. 2011. *Description of the Gorleben Site. Part 3: Results of the geological surface and underground exploration of the salt formation.* Bundesanstalt für Geowissenschaften und Rohstoffe (BGR), ISBN 978-3-9813373-6-5, Hannover, Germany.

Bracke, G. and K. Fischer-Appelt. 2013. *Overview on the Preliminary Safety Analysis of the Gorleben Site.* WM2013 Conference, Phoenix, AZ, USA. No.13298.

Deal, D.E., R.J. Abitz, D.S. Belski, J.B. Case, M.E. Crawley, C.A. Givens, P.P.J. Lipponer, D.J. Milligan, J. Myers, D.W. Powers, and M.A. Valdivia. 1995. *Brine Sampling and Evaluation Program 1992-1993 Report and Summary of BSEP Data since 1982.* DOE-WIPP 94-011, Westinghouse Electric Corporation, Carlsbad, NM.

Deal, D.E., R.J. Abitz, J.B. Case, M.E. Crawley, R.M. Deshler, P.E. Drez, C.A. Givens, R.B. King, B.A. Lautes, J. Myers, S. Niou, J.M. Pietz, W.M. Roggenthen, J. R. Tyburski, M.G. Wallace, and D.S. Belski. 1989. *Brine Sampling and Evaluation Program, 1988 Report.* DOE/WIPP-89-015. Prepared for the US Department of Energy by IT Corporation and Westinghouse Electric Corporation, Carlsbad, NM.

DOE. 2013. *Strategy for the Management and Disposal of Used Nuclear Fuel and High-Level Radioactive Waste.* Washington, DC: US Department of Energy.

DOE. 2014. *Waste Isolation Pilot Plant Recovery Plan.*

<http://www.wipp.energy.gov/Special/WIPP%20Recovery%20Plan.pdf>.

Eickemeier, R., S. Heusermann, M. Knauth, W. Minkley, H.-K. Nipp. And T. Popp. 2013. *Preliminary Safety Analysis of the Gorleben Site: Thermo-mechanical Analysis of the Integrity of the Geological Barrier in the Gorleben Salt Formation.* WM2013 Conference, Phoenix, AZ, USA. No. 13307.

Freeze, G.A., T.L. Christian-Frear, and S.W. Webb. 1997. *Modeling Brine Inflow to Room Q: A Numerical Investigation of Flow Mechanisms.* SAND96-0561. Sandia National Laboratories, Albuquerque, NM.

Freeze, G., S. D. Sevougian, C.D. Leigh, M. Gross, J. Wolf, J. Möning, and D. Buhmann. 2014. *A New Approach for Feature Event and Process (FEP) Analysis of UNF/HLW Disposal.* Waste Management Symposium, Phoenix, AZ.

GRS (Gesellschaft für Anlagen- und Reaktorsicherheit). 2012. *Vorläufige Sicherheitsanalyse für den Standort Gorleben.* Köln, Germany. <http://www.grs.de/vorlaeufige-sicherheitsanalysegorleben-vsg>.

Günther, R.-M., K. Salzer, T. Popp, and C. Lüdeling. 2014. *Steady-state Creep of Rock Salt - Improved Approaches for Lab Determination and Modeling to Describe Transient, Stationary and Accelerated Creep, Dilatancy and Healing.* 48th US Rock Mechanics Symposium, Minneapolis, MN, USA. No. 14-7051.

Hampel, A., J.G. Argüello, F. Hansen, R.M. Günther, K. Salzer, K., W. Minkley, K.-H. Lux, K. Herchen, U. Düsterloh, A. Pudewills, S. Yildirim, K. Staudtmeister, R. Rokahr, D. Zapf, A. Gährken, C. Missal, and J. Stahlmann. 2013. *Benchmark Calculations of the Thermo-Mechanical Behavior of Rock Salt – Results from a US-German Joint Project.* 47th US Rock Mechanics Symposium, San Francisco, California.

Hampel, A., K. Salzer, R.-M. Günther, w. Minkley, A. Pudewills, B. Leuger, D. Zapf, K. Staudtmeister, R. Rokahr, K. Herchen, R. Wolters, and K.-H. Lux, 2012. *Joint Projects on the Comparison of Constitutive Models for the Mechanical Behavior of Rock Salt - II. Overview of the Models and Results of 3-D Benchmark Calculations.* In P. Bérest, M. Ghoreychi, F. Hadj-Hassen & M. Tijani (eds.), *Mechanical Behavior of Salt VII*, Proc. 7th Conference, Paris. London: Taylor & Francis Group (Balkema)

- Hansen, F.D. and C.D. Leigh. 2011. *Salt Disposal of Heat-Generating Nuclear Waste*. SAND2011-0161. Sandia National Laboratories, Albuquerque, NM.
- Hansen, F.D. 2013. *Underground Salt Research Laboratory at the Waste Isolation Pilot Plant*. SAND2013-0356C. International High Level Radioactive Waste Management Symposium. Sandia National Laboratories, Albuquerque, NM.
- Hansen, F.D., K. Kuhlman, C. Howard and J. Holland. 2015. *Capturing Early Evolution of Salt Openings*. American Rock Mechanics Association, San Francisco. In Press.
- Hansen, F. and T. Popp. 2015. *Geomechanics Issues Regarding Heat-Generating Waste Disposal in Salt*. American Rock Mechanics Association, San Francisco. In press.
- Hansen, F.D. 2015. *An Underground Laboratory in the Context of Salt Disposal Research*. WM2015 Conference, Phoenix, AZ. SAND2014-18368C. Sandia National Laboratories, Albuquerque, NM.
- Hardin, E., K. Kuhlman, and F. D. Hansen. 2014. *Technical Feasibility of Measuring Low-Stress, Low Strain-Rate Deformation Relevant to a Salt Repository*. Prepared for US Department of Energy, Office of Used Nuclear Fuel Disposition. FCRD-UFD-2014-000614 Rev. 0. SAND2014-17435 R. Sandia National Laboratories, Albuquerque, NM.
- Holland, J.F. 2014. *Mechanical and Hydrological Characterization of the Near-field Surrounding Excavations in a Geologic Salt Formation*. SAND2014-17822 R (Appendix D). Sandia National Laboratories, Albuquerque, NM.
- Howell, V.D. 2014. *Sandia Hosts Successful US-German Workshop*. Sandia National Laboratories/Lab News. Albuquerque, NM.
- http://energy.sandia.gov/?page_id=17258.
- <http://www.oecd-nea.org/rwm/saltclub/>.
- <http://www.modern-fp7.eu>
- <http://www.igdtp.eu>
- IAEA. 2001. *The Use of Scientific and Technical Results from Underground Research Laboratory Investigations for the Geological Disposal of Radioactive Waste*. International Atomic Energy Agency. IAEA-TECDOC-1243.
- IfG. 2012. *Laboruntersuchungen am Gemisch Schnittsalz - Friedländer Ton*. Institut für Gebirgsmechanik GmbH, Leipzig, 07.12.2012, 56 pp.
- Johnson, K.S. and S. Gonzales. 1978. *Salt Deposits in the United States and Regional Characteristics Important to Storage of Radioactive Waste*. Prepared for Union Carbide Corporation, Nuclear Division, Office of Waste Isolation Y/OWI/SUB.-7414/1.
- Kock, I., J. Larue, H. Fischer, G. Frieling, M. Navarro, and H. Seher. 2013. *Results from One- and Two-Phase Fluid Flow Calculations within the Preliminary Safety Analysis of the Gorleben Site*. WM2013 Conference, Phoenix, AZ. No. 13310.
- Kröhn, P-K., D. Stührenberg, M. Herklotz, U. Heemann, C. Lerch, X. Mingliang. 2009. *Restporosität und-permeabilität von kompaktierendem Salzgrus-Versatz*. Gesellschaft für Anlagen-und Reaktorsicherheit. GRS-254 ISBN 978-3-939355-29-8.
- Munson, D.E., R.L. Jones, D.L. Hoag, and J.R. Ball. 1988. *Mining Development Test (Room D): In-Situ Data Report (March 1984 – May 1988) Waste Isolation Pilot Plant (WIPP) Thermal/Structural Interactions Program*. SAND88-1460, Sandia National Laboratories, Albuquerque, NM.

Munson, D.E., R.L. Jones, J.R. Ball, R.M. Clancy, D.L. Hoag, and S.V. Petney. 1990. *Overtest for Simulated Defense High-Level Waste (Room B): In-Situ Data Report (May 1984 - February 1988) Waste Isolation Pilot Plant (WIPP) Thermal/Structural Interactions Program.* SAND89-2671, Sandia National Laboratories, Albuquerque, NM.

Nuclear Energy Agency. 2013. *Underground Research Laboratories (URL).* Radioactive Waste Management NEA/RWM/R. NEA No. 70122.

Nuclear Energy Agency. 2014. *Natural Analogues for Safety Cases of Repositories in Rock Salt,* Salt Club Workshop Proceedings, Braunschweig, Germany. Radioactive Waste Management, NEA/RWM/R(2013).

Roberts, R.M., R.L. Beauheim, and P.S. Domski. 1999. *Hydraulic Testing of Salado Formation Evaporites at the Waste Isolation Pilot Plant Site: Final report.* SAND98-2537. Sandia National Laboratories, Albuquerque, NM.

Steininger, W., F.D. Hansen, E. Biurrun and W. Bollingerfehr. 2013. *US/German Collaboration in Salt Repository Research, Design and Operation.* WM2013 Conference. Phoenix, AZ.

Schulze, O., T. Popp, and H. Kern. 2001. *Development of Damage and Permeability in Deforming Rock Salt.* Engineering Geology, 61(2-3):163–180.

Van Luik, A. 2013. *The Role of In-Situ Testing In Support of a Salt Repository Safety Case.* ABC-Salt Workshop III Actinide Brine Chemistry. US Department of Energy, Carlsbad Field Office, Carlsbad, NM.

Van Sambeek, L.L., J.L. Ratigan, and F.D. Hansen. 1993. *Dilatancy of Rock Salt in Laboratory Tests,* International Journal of Rock Mechanics, Mineral Science & Geomechanics Abstracts. SAND92-2184A, Sandia National Laboratories, Albuquerque, NM.

APPENDIX A: AGENDA

5th US/German Workshop on Salt Repository Research, Design, and Operation

La Fonda Hotel
Santa Fe, New Mexico

September 7 – 11, 2014

*Please join us Sunday September 7, 2014 for a
welcome and reception at the La Fonda Hotel
hosted by Sandia National Laboratories beginning
at 6:00 PM.*

Day 1**Technical Agenda****September 8 - Monday**

08:00-08:45	Sign-in and distribution of meeting materials	
08:45-09:45	Welcome addresses	H.C. Pape (BMWi) US-DOE Offices
	Highlights of US/German Collaboration	F. Hansen (SNL) W. Steininger (PTKA)

Repository Operational Safety

09:45-10:45	Welcome and keynote on operational safety	S. Rottler, Vice President (SNL)
10:45-11:00	Break	
11:00-11:20	Operational safety activities in Germany	T. v. Berlepsch (DBE TEC)
11:20-11:40	Operational safety at US repositories	E. Hardin (SNL)
11:40-12:00	Case Study: Recent WIPP Experience	A. Van Luik (CBFO)
12:00-13:30	Workshop Group Photo and Lunch	
13:30-14:00	WIPP Recovery Plan	T. Reynolds (NWP)
14:00-14:30	Panel Discussion	E. Hardin - Lead

Retrievability and Repository Design

14:30-14:50	U.S. Perspective on retrievability, retrieval, and reversiblity	S. Wagner (SNL)
14:50-15:10	Retrievability as design requirement for a repository for HLW and SF	W. Bollingerfehr (DBE TEC)
15:10-15:30	Salt Disposal RD&D	R. MacKinnon (SNL)
15:30-15:50	Natural Analogues	N. Rempe US
15:50-16:10	Dutch Salt Safety Case and Research Program	J. Hart (NRG) TBD
16:10-16:30	Break	
16:30	Depart for Los Alamos Bradbury Museum Tour and Dinner	J. Icenhower (SNL)

**Day 1 Companion Event - Walking Tour of Downtown Santa Fe.
Begins 10 AM. Map will be provided**

Day 2

September 9 – Tuesday

TM-behavior of salt

08:30-08:50	Update on the “Joint Project on Constitutive Laws benchmark”	A. Hampel (Scientific Consultant)
08:50-09:10	Modeling WIPP rooms B/D	L. Argüello (SNL)
09:10-09:30	Laboratory tests on WIPP salt (update)	U. Düsterloh (TU Clausthal)
09:30-09:50	Laboratory tests on WIPP salt (update)	T. Popp (IfG)
09:50-10:10	Complementary laboratory tests on WIPP salt at higher temperatures	I. Plischke (BGR)
10:10-10:30	Characterization of halite from WIPP and Gorleben	M. Pusch (BGR)
10:30-10:50	Break	

Plugging and Sealing

10:50-11:10	Shaft Seal System of VSG	N. Müller-Hoeppé (DBE TEC)
11:10-11:30	ELSA shaft seal project	U. Glaubach (TU BAF)
11:30-11:50	Salt reconsolidation principles and application	F. Hansen (SNL)
11:50-12:10	Discrepancy between modeling and measurement in the realization of real seals	N. Müller-Hoeppé (DBE TEC)
12:10-13:30	Lunch	

Safety Case and Performance Assessment

13:30-13:50	Summary /Synopsis and open questions of the VSG	J. Mönig (GRS)
13:50-14:10	US response on the methodological approach (Interim report ISIBEL-project)	C. Camphouse (SNL)
14:10-14:30	PA development (PFLOTRAN) and the Safety Case	G. Hammond (SNL)
14:30-14:50	Visualization tool VIRTUS: possibilities and limits of application	K. Wieczorek (GRS)
14:50-15:20	Break	
15:20-15:35	FEPs development activities	G. Freeze (SNL)
15:35-15:50	FEPs development activities	J. Wolf (GRS)
15:50-16:10	IGD-TP Joint Activity: Handling of uncertainties	D-A. Becker (GRS)
16:10-16:30	Feedback Session	G. Freeze (SNL)
16:30	Optional – Restaurant reservations for those interested at. Omira Bar & Grill	Brazilian Buffet 1005 S. St. Francis Drive

Day 2 Companion Event - Folk Art Museum of Santa Fe
Begins 10 AM. Transportation will be provided

Day 3**Technical Agenda****September 10 – Wednesday**

08:30-09:00	Uncertainty analysis	C. Sallaberry (SNL), D-A. Becker (GRS)
-------------	----------------------	--

Special Topics

09:00-9:30	HM-modeling and two-phase flow	R. Wolters (TUCI) J. Rutquist (LBNL)
9:30-10:00	P&T in the context of waste management	W. Bollingerfehr (DBE TEC) J. Mönig (GRS)
10:00-10:30	Report on discussion results of the hydrology group (separate micromeeting)	J. Wolf (GRS) K. Kuhlman (SNL)
10:30-10:45	Break	
10:45-11:15	NEA-Salt Club update	J. Mönig, Chairman (GRS)
11:15-12:00	Proposals for future joint collaboration: German Perspective	W. Steininger (PTKA), W. Bollingerfehr (DBE TEC)
	Proposals for future joint collaboration: US Perspective	C. Leigh (SNL)
12:00-13:00	Lunch	

Specially Scheduled Breakout Sessions

13:00-17:00	To be selected	C. Leigh (SNL)
-------------	----------------	----------------

Day 3 Companion Event
Nothing in particular is scheduled

**Day 4 Participant and Companion Event
Field Trip – Geology of Note in the Santa Fe Area**

Thursday September 11, 2014

Departs La Fonda Hotel at 7:00 AM

Returns to La Fonda Hotel at 7:00 PM

Transportation and Box Lunch Provided

(Tour Includes busing to locations of interest and walking around those locations. Please wear shoes suitable for walking)

APPENDIX B: WELCOME ADDRESS:

Dr. Pape—Welcome Address

Ladies and Gentlemen,

On behalf of the Federal Ministry for Economic Affairs and Energy – the German ministry responsible for non-site specific project-funded research into nuclear waste disposal – I would like to extend my warmest greetings to you at the start of the fifth US-German workshop on Salt Repository Research, Design and Operation organized by Sandia National Laboratories, DBE-Technology, and Project Management Agency Karlsruhe. I would particularly like to thank Sandia for the excellent preparations in Santa Fe.

I am looking forward to this event, attended by fifty international participants, which will give us an overview of topics reflecting the current status of salt repository research, design, and operation, in particular addressing the thermomechanical behaviour of salt, plugging and sealing, and the safety case.

The event brings together “salt experts” from the US and Germany, providing them with the opportunity to exchange information, to analyse the current status of research, discuss what has happened so far, and in doing so, draw conclusions for the future joint research activities.

This annual workshop is a poster child of our cooperation. There is a long tradition of co-operation between the US and Germany dating back to the 1970s. Some of our American colleagues were part of the research being done then, especially in the underground laboratory in the Asse research mine in Germany. We well remember the famous “BAMBUS” project, the world’s first long-term demonstration experiment.

Changes in political priorities in both countries repeatedly led to the joint research work being put on hold. However, in the scientific community the view prevailed that it is indeed technically feasible to construct, operate, and safely close final repositories within salt rock formations.

Starting in 2009, both countries have again been more open-minded about rock salt to host final repositories and thus reverted back to the long-standing tradition of German-US co-operation in this area. So far, four workshops have been held as part of the effort to share scientific experience and resume our fruitful co-operation.

We owe these workshops to four people in particular, namely Frank Hansen of Sandia National Laboratories, Walter Steininger from the Project Management Agency in Karlsruhe, and Enrique Biurrun and Wilhelm Bollingerfehr of DBE Technology. A very special thanks to these three men for their dedicated work over many years and for preparing and organising the event.

2011 marks another important milestone in US-German co-operation: this was the year of the signing of the agreement between the Federal Ministry for Economic Affairs and the two Offices of the U.S. Department of Energy – Environmental Management and Nuclear Energy. I would like to thank the two representatives of the US-DOE for their support and for their active commitment to our co-operation.

The fact that both countries had resumed their exploratory work on rock salt was highlighted by the establishment of the Salt Club, an expert group within the OECD/NEA. Both the US and Germany were founding members of this group, which was set up in 2012 and is chaired by Germany’s Jörg Mönig. We are of course also delighted that Michael Siemann has been appointed Head of Division for Radiological Protection and Radioactive Waste Management in the Secretariat of the NEA (Nuclear Energy Agency) in Paris.

I think that this brief overview of the history of our co-operation in research on rock salt disposal has already given us an idea of how influential politics and changes in the political situation in both our countries have always been in the context of the issues we are dealing with at this workshop.

This brings me to my next point, namely the changes that have come about in Germany with regard to the final disposal of nuclear waste.

The legal framework for this is given by the European Directive on spent fuel and radioactive waste adopted in 2011, which has to be implemented at a national level, and the German Site Selection Act at the national level which entered into force in 2013. The Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety has the lead responsibility for both areas. It shares areas of common interest with the Federal Ministry for Economic Affairs and Energy regarding the final disposal of radioactive waste since the latter is mainly responsible for site-independent applied research into nuclear waste disposal. In this role, the Federal Ministry for Economic Affairs and Energy determines together with the Project Management Agency Karlsruhe the strategic and technical orientation of the research activities.

Based on the European spent fuel and radioactive waste directive, Germany like all other EU Member States is called upon to set up a National Waste Management Program for all radioactive waste by summer 2015. Draft programs so far include two repository sites for Germany, one waste with negligible heat generation and one for heat-generating high-level radioactive waste.

Specific cases are on the one hand the ERAM at Morsleben. This final repository for low and medium-level radioactive waste was established in a former potash and rock salt mine. The storage in Morsleben was halted in 1998. Currently, the mine areas are being stabilised and the closure procedure is underway.

**Dr. Pape—Welcome Address
(Continued)**

On the other hand, there is the Asse II mine, a former salt mine. I will address it later.

The Shaft Konrad has been proposed as a final repository for low and medium-level radioactive waste and the planning approval has been granted. The work on converting Konrad into a final repository has been ongoing since 2007, and completion of the work is currently scheduled for 2022. The Konrad repository is crucial for the storage of non-heat generating low and medium-level radioactive waste resulting from the decommissioning of Germany's nuclear power plants. A speedy completion of the Konrad repository without any further delay is necessary to provide planning certainty for nuclear power plant operators and the institutions involved.

According to the Site Selection Act, a storage site and/or alternative methods of disposal are being sought. The content of the Site Selection Act was covered in detail at the last workshop in Berlin in 2013. An essential aspect of the Act is that it prescribes an open-ended and unbiased site selection process, starting with a "white map" of Germany. As a result, potential sites in rock salt will have to compete with sites in alternative rock formations.

At the same time, the implementation of the Act means that, in addition to consideration of alternative means of disposal and rock formations, further work has to be done on the science and technology of the suitability of rock salt for the disposal of radioactive waste. Here, we particularly need to draw on international networks and experience.

The Commission "Storing High-Level Radioactive Waste" is responsible for the actual site selection process as part of the implementation of the Site Selection Act. It has taken up its work this summer and is made up of scientists, representatives of society, members of the German Bundestag and members of the Länder governments. The Commission's task is to address fundamental aspects of the disposal of high-level radioactive waste and to review the existing requirements of the Site Selection Act. In seeking to fulfil this task, the Commission will draw on the work of expert institutions. In this context, major importance will be placed on international experiences. In addition to the analysis of expert reports and expert opinions and judgments, the Commission will also address international projects and visit them. The Commission is required to submit its findings in a report to the German Bundestag by mid-2016.

This report will be decisive for the long-term orientation of the disposal strategy for high-level radioactive waste in Germany.

In addition to these future tasks, and in the context of the search for a site for a High Level Waste repository and the completion of the Konrad final repository, the low and medium-level radioactive waste stored in the Asse II mine takes on special importance. There is the political will to retrieve this waste and store it in an appropriate final repository.

As you know, the Asse mine is a former salt mine which the Federal Government used as a research mine and a pilot final storage facility from 1967 to 1978. Approx. 126,000 barrels of low and medium-level radioactive waste were stored there for research purposes. During the preparations for the closure of the mine according to mining law, the rules were changed in 2009 in favour of a closure under nuclear law. Also, the operator of the mine changed. Since 2009, the Federal Office for Radiation Protection has been the new operator of the mine and after comparing various options in January 2010 it presented the recovery of the stored waste as the favoured option. First drillings have since been made both underground in the storage chambers for fact-finding purposes and above ground for the exploration of a new shaft which is necessary for the retrieval of nuclear waste. However, it continues to be unclear whether the retrieval is technically feasible, especially with regard to the radiation protection measures, and how or where the retrieved waste will be stored. According to the operator, the Federal Office for Radiation Protection, a retrieval of the waste is not to be expected before 2033.

After this digression on the three final storage projects for low and medium-level radioactive waste, I would now like to speak about the Gorleben project and address the implications resulting from the implementation of the Site Selection Act.

In the 1980s, the Gorleben salt dome was selected for exploration to see if it would be suitable as a final repository. As a result of political changes, non-saline rock formations and alternative options have increasingly been considered, particularly in recent times. The Site Selection Act stipulates that such alternative options must be considered, which ultimately led to the exploration work in Gorleben being abandoned in November 2012. The Site Selection Act, which entered into force in summer 2013, also sets out the requirement for Gorleben to be included in the selection procedure and to be treated the same as any other possible site, that is in line with the rules and criteria set out in the Act. For the Gorleben salt mine this means that operations there are to be brought down to what is "absolutely necessary". Only parts of the infrastructure are to remain operational whereas the area in which explorations have so far been taken place is to be closed and visits stopped. The security fence above the ground is to be reduced to reflect the "normal industrial standard".

I'm giving you this information on the Asse and Konrad projects for final repositories in Germany, on the Gorleben explorations and on the new initiative for searching a site for a final repository for High-Level Waste in Germany, to make it clear to you just how much we need additional support from science, particularly for the process of disposing of highly radioactive waste.

**Dr. Pape—Welcome Address
(Continued)**

The work that is being done as part of our US-German co-operation is important for us to gain detailed insights into the qualities of rock salt as a host rock and to bring older findings in line with the current state-of-the-art of science and technology. Our countries have similar salt formations, i.e. salt domes and bedded salt, and could use them in similar ways. This geological fact makes the US our most important international research partner on salt rock – and the fact, of course, that your country has excellent expertise in this area. As we address the challenges in hand, Germany will continue to add to its own long-standing expertise on salt rock and share it. Our co-operation makes it possible for both partners to create synergies in our work and thus advance our programmes. We can reap joint scientific and economic benefits and continue our joint research based on what we have already achieved. This of course includes the successful joint project on constitutive laws benchmark, the joint work on the FEP-catalogue (FEP = Features, Events, Processes) and on natural analogues. Safety in the operational phase will be another focal area for research. We will of course go more into detail on this on Wednesday, when we discuss our future plans.

Please take note that the fact that Germany is exploring other possible ways of disposing nuclear waste does not mean that we are turning our backs on salt as a host rock. Salt remains very much on the table as an option, as do non-saline rocks (clay and granite). We need more research in all these areas. This fact is reflected in the work that is currently being done by our ministry and the Project Management Agency in Karlsruhe to update our joint funding strategy.

Ladies and Gentlemen,

All that remains for me to say is that I very much hope that the fruitful co-operation that already exists between our countries will be continued with the same degree of intensity and commitment.

On this note, I wish us all a very successful event.

APPENDIX C: LIST OF PARTICIPANTS AND OBSERVERS FROM 5th WORKSHOP



LAST NAME	COMPANY	EMAIL
Argüello, Jose	SNL	jgargue@sandia.gov
Bahr, Jean	NWTRB	jmbahr@geology.wisc.edu
Becker, Dirk	GRS	Dirk-Alexander.Becker@grs.de
Bollingerfehr, Wilhelm	DBE TECHNOLOGY GmbH	bollingerfehr@dbe.de
Bühler, Michael H.	KIT	michael.buehler@kit.edu
Buchholz, Stuart	RESPEC	stuart.buchholz@respec.com
Bushman, Nancy	DOE	nancy.buschman@hq.doe.gov
Camphouse, Chris	SNL	rccamph@sandia.gov
Davies, Peter	SNL	pbdavie@sandia.gov
Düsterloh, Uwe	TU Clausthal	uwe.duesterloh@tu-clausthal.de
Economy, Kathleen	EPA	economy,kathleen@epa.gov
Fahland, Sandra	BGR	sandra.fahland@bgr.de
Freeze, Geoffrey	SNL	gafreez@sandia.gov
Glaubach, Uwe	TU Freiberg	uwe.glaubach@mabb.tu-freiberg.de
Hammer, Jörg	BGR	joerg.hammer@bgr.de
Hammond, Glenn	SNL	gehammo@sandia.gov

LAST NAME	COMPANY	EMAIL
Hansen, Frank	SNL	fdhanse@sandia.gov
Hampel, Andreas	Hampel Cons.	hampel@hampel-consulting.de
Hardin, Ernest	SNL	ehardin@sandia.gov
Hart, Japp	NRG	hart@nrg.edu; j.hart.4@hotmail.com
Icenhower, Jonathan	SNL	jpichenh@sandia.gov
Kuhlman, Kristopher	SNL	klkuhlm@sandia.gov
Leigh, Christi	SNL	cdeigh@sandia.gov
Lux, Karl-Heinz	TU Clausthal	janett.henkel@tu-clausthal.de
MacKinnon, Bob	SNL	rjmacki@sandia.gov
Missal, Christian	TU Braunschweig	c.missal@tu-braunschweig.de
Mönig, Jörg	GRS	Joerg.Moenig@grs.de
Müller-Hoeppe, Nina	DBE TECHNOLOGY GmbH	muellerhoeppe@dbe.de
Pape, Hans-Christoph	BMW I	Hans-Christoph.pape@bmwi.bund.de
Plischke, Ingo	BGR	ingo.plischke@bgr.de
Popp, Till	IfG	till.poppe@ifg-leipzig.de
Pusch, Maximilian	BGR	Maximilian.Pusch@bgr.de
Rempe, Norbert	ng(o)3	rempent@yahoo.com
Reynolds, Tammy	Nuclear Waste Partnership	tammy.reynolds@wipp.ws
Rottler, Steve	SNL	jsrott@sandia.gov
Rutqvist, Jonny	BNL	jrutqvist@lbl.gov
Schneider, Anke	GRS	Anke.Schneider@grs.de
Self, Stephen	NRC	stephen.self@nrc.gov
Sevouqian, David	SNL	sdsevou@sandia.gov
Steininger, Walter	KIT	walter.steininger@kit.edu
Van Luik, Abe	DOE	abraham.vanluik@wipp.ws
Von Berlepsch, Thilo	DBE TECHNOLOGY GmbH	thilo.berlepsch@dbe.de
Wagner, Steve	SNL	swagner@sandia.gov
Wieczorek, Klaus	GRS	Klaus.Wieczorek@grs.de
Wolf, Jens	GRS	Jens.Wolf@grs.de
Wolters, Ralf	TU Clausthal	ralf.wolters@tu-clausthal.de
Casey, Shannon	SNL	slcasey@sandia.gov
Howell, V Dina	SNL	vdhowel@sandia.gov
Mays, Leann	SNL	lmays@sandia.gov

APPENDIX D: PRESENTATIONS

Highlights of US German Salt Repository Collaborations

5th US/German Workshop on
Salt Repository Research, Design and Operations

Santa Fe, New Mexico, USA

September 7-11, 2014

Frank Hansen--Sandia National Laboratories, Albuquerque New Mexico USA

Walter Steininger-- Karlsruhe Institute of Technology, Project Management Agency

Abstract

This presentation summarizes some of the highlights from more than 40 years of collaboration between Germany and the United States (US) involving salt repository science and engineering. The US/German collaborations have never before been as productive over such a wide range of topics as they have been over that last five years. The excellent collaborations are due in part to historical developments in the US and Germany and in part to long-standing collaborations of a few key researchers. Today German rock salt repository activities and US waste management programs face challenges that may adversely affect current and future core capabilities in rock salt repository science and technology. We are using these annual workshops on salt repository research, design and operation to address this recognized need.

Topics addressed by the US/German salt repository collaborations align well with the findings and recommendations summarized by the US Blue Ribbon Commission on America's Nuclear Future and are consistent with the aspirations of the key topics of the Strategic Research Agenda of the Implementing Geological Disposal of Radioactive Waste Technology Platform, and BMWi's R&D concept as well. These workshops revived joint efforts in salt repository investigations after some years of hibernation by leveraging collective efforts for the benefit of respective programs. These efforts form a basis for providing attractive, cost-effective insurance against the premature loss of virtually irreplaceable scientific expertise and institutional memory.

During the last 40-50 years extensive research, development and demonstration activities have contributed to the profound knowledge available concerning rock salt. These achievements were manifested in laboratory and in situ experiments, as well as in large-scale demonstration activities. In recent years noteworthy progress was made in the US and Germany on safety assessment exercises, geomechanical benchmark modeling, and technological developments, such as waste emplacement techniques. Because of this work, comprehensive knowledge and sound expertise in various fields of salt repository science and engineering have been developed.

Sandia National Laboratories is a multi-program laboratory operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DEAC04-94AL85000. SAND2014-16139A.

Exceptional service in the national interest

Sandia National Laboratories

September 2014

INTERNATIONAL US/German Workshop
Salt Repository Research, Design, & Operation
Santa Fe, New Mexico, USA
September 7-11, 2014

Walter Steininger-PTKA
Frank Hansen-Sandia National Labs

Salt Repository Research, Design and Operation
Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC52-05NA20050. SAND2014-497C

Sandia National Laboratories
PTKA, Project Management Agency, Kalifor
Fachliche Institute of Technology
for Environmental Engineering
and Management
DBETEC
E&TE TECHNOLOGY GROUP
DOE
ENERGY
NASA

Perspectives α to Ω

Sandia National Laboratories

On March 16 1943 J. Robert Oppenheimer met Dorothy Scarritt McKibbin in the La Fonda and hired her to run a discreet office that would become Los Alamos.



Welcome to the continuation of history

General Chronology of Salt Repository Research

Sandia National Laboratories

Project Salt Vault
WIPP Underground Research Laboratory

1980
1984
2014


TSDE / BAMBUS
US/German Collaboration
Salt Repository Science

ASSE
BMT



German Accumulation of Expertise in the Past Decades

Sandia National Laboratories

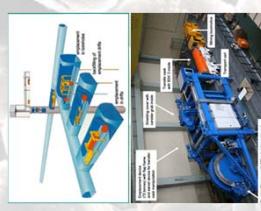

- Techniques for waste emplacement were developed (Direct Disposal = reference repository concept)
- Feasibility of vertical borehole emplacement of spent fuel & HLW (BSK-3 canister) was shown
- Instruments, tools, and methodologies for modeling and safety analysis were substantially further developed and have been applied in several exercises (e.g. vSG)
- In Germany underground disposal facilities for chemical-toxic wastes are licensed and are operational for years
- A lot of experience in rock salt available from practical application and excellent RD&D

USA Accumulation of Expertise in the Past Decades

- Sandia, as Science Advisor, developed much of the salt expertise for the Waste Isolation Pilot Plant.**
- WIPP was a successful operation 1999-2014.**
- Solution Mining Research, Strategic Petroleum Reserve, American Rock Mechanics Assoc., Salt Mechanics Symposia**
- Salt mining is a world-wide, proven and reliable technology**
- Rock salt is highly suitable for hosting a repository for heat-generating nuclear waste**

Hansen F.D. and C.D. Leigh. 2011. *Salt Disposal of Heat-Generating Nuclear Waste*. SAND2011-0161. Sandia National Laboratories Albuquerque New Mexico.

Benefits of the Strategic Partnership in National and International Cooperation

- Collaboration hibernated for more than 10 years (different priorities in Germany and US)
- Re-start of collaboration in 2010 with a common US-German Workshop in Mississippi (organized by PT-KA, Sandia NL, DBE TEC)
- Benefits
 - To exchange experiences and know-how, get external expertise and feedback
 - Expertise and knowledge to make science-based recommendations on the pros and cons of different host rocks
 - Mutual added value, the appropriate investment of money, cost sharing and the gain of confidence
 - Internationally accepted is the opinion to cooperate with foreign partners because of the importance for any national program
 - Topics emphasized
 - Safety Case
 - Salt repository concepts & designs
 - Modeling of groundwater flow and radionuclide transport
 - Geotechnical barriers
 - Site characterization & host rock characterization

US/German Salt Repository Research

- Collaborations between the US and West Germany began in the 1970's (Asse-Temp.Tests)
 - Technical evaluations for salt disposal of heat-generating waste experienced a rather long hiatus because of "priority changes" in both countries
 - Salt repository research in Germany slowed down somewhat since 2000 (political decisions, moratorium), but increased in 2010.
- Representatives of institutions in both countries wished to renew collaborations and cooperation on overall salt repository science, to coordinate a potential research agenda of mutual interest, and to leverage collective efforts for the benefit of their respective programs.
- By the first US/German Workshops on Salt Repository Research, Design and Operation collaboration was re-initiated.
- A coordinated research agenda has been pursued to maximize mutual benefit.

The **fifth workshop** will highlight **Repository Design and Operations** and this topic will be the focus of the first day. The focus of the second day will be the **Thermomechanical Behavior Of Salt, Plugging And Sealing, And The Safety Case**. Special topics will be addressed on the third day.

Accomplishments and Ongoing Activities

- Five consecutive workshops (information: http://energy.sandia.gov/page_id=17258, includes workshop proceedings and all presentations)
- Memorandum of Understanding between the German Ministry of Economic Affairs and Energy and the US-Department of Energy [Environment Management (EM) and Nuclear Energy (NE)]
- Founding of the OECD/NEA "SaltClub" (Participants: Germany, US, The Netherlands, Poland)
 - Natural analogues workshop for rock salt
 - Features, Events, and Procedures (FEP) catalogue for rock salt
 - State-of-the-art report on salt reconsolidation
 - Salt knowledge archive
 - Workshops on actinide brine chemistry (ABC) with Los Alamos National Laboratory

Kuhlmeyer, K.L., S. Wagner, D. Kickler, P. Kürkes, C. Herrick, D. Gaultin. 2012. Review and Evaluation of Salt I&O Data for Disposal of Nuclear Waste in salt. Fuel Cycle Research & Development. FCRD-UD-2012-00880. SAND2012-0888P

Accomplishments and Ongoing Activities

- Collaboration in the Joint Project on "benchmarking constitutive models for rock salt" (Sandia & German organizations) (funding by BMWi and US-DOE)
- Contributions to conferences and workshops (American Rock Mechanics Association, Mechanical Behavior of Salt Symposia, Waste Management)
- Notably the ARMA conference had five sessions on "salt" with many contributions made by US/German collaborators
- Collaborative efforts were also completed in the EC (Euratom)-Project (7th Framework Program) "Monitoring Developments for Safe Repository Operation and Staged Closure" (ModerRin)
- Collaboration/information exchange in the area of safety case
- Common "Joint activity on Handling of Uncertainties" in the framework of the IGD-TP (Implementing Geological Disposal - Technology Platform)

Spangler, M., F.D. Hanson, E. Blaum and W. Bell (2013). US/German Collaboration in Salt Repository Research, Design and Operation. WRA2013 Conference, February 24-28, 2013, Phoenix, Arizona, USA.

Activity Overview 5th US/German Workshop

- Ongoing collaborations**
 - Operational Safety—Key Note Rottler/Kennedy/v. Bertlepsch/Hardin presentations
 - Retrievability and Repository Design—Wagner/Bollingerfähr/v. Bertlepsch/Hardin
 - Benchmark modeling (Joint Project III)—Hampel/Arguello presentations
 - Laboratory testing of WIPP salt—Düsterloh/Popp/Plischke/Pusch presentations
 - Plugging and sealing—Müller-Hoeppke/Glaubach/Hansen Presentations
 - Safety case and performance assessment—Mönig/Hammond/Wieczorek/Freeze/Wolf/Becker/Sallaberry/Rempe presentations
 - Nuclear Energy Agency Salt Club—Mönig presentation
 - Special topics—Researcher-to-researcher collaborations
- Next steps**
 - Proposals for joint collaboration—wrap-up session
 - SALT MECH VIII
 - Field-scale natural analogue observations
 - Underground laboratory in the context of salt research and development

German Testing of WIPP Salt

The figure consists of two side-by-side graphs. The left graph plots Axial strain (1/s) against Axial stress (N/mm²) for four samples labeled 1, 2, 3, and 4. The right graph plots Axial strain (1/s) against Axial stress (N) for three samples labeled 1, 2, and 3. Both graphs show initial linear elastic behavior followed by yielding and plastic deformation.

Perceptions—Future Work

- US and German proposals/ideas for future collaboration**
 - Reconsolidation of granular salt
 - Final porosity
 - Additives for construction and sealing properties
 - Numerical modeling verification
 - Further analogue experience
- Underground research lab in the context of salt R&D**
 - Viability of salt formations for repository is established
 - Need a Framework for URL implementation
 - Justification required in context of all salt repository R&D
- The SALT Primer**
 - Reference for college classroom
 - Basics, experimental techniques, isochoric deformation, damage and healing
 - Modeling
 - Applications, cavities, boreholes, repository

Exceptional service in the national interest

Sandia National Laboratories

Engineered Safety at Sandia National Laboratories

September 8, 2014

J. Stephen Rottler
Vice President, California Laboratory
Vice President, Energy & Climate Programs

Sandia National Laboratories is a multi-program laboratory managed and operated by Battelle for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.


SAND 2014-17166 PE

DOE/NNSA/National Nuclear Security Administration

NASA

DOE

Sandia's Sites

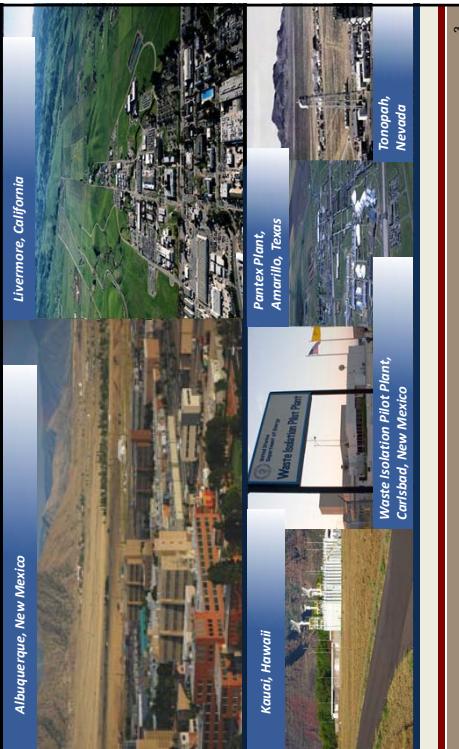

3


Sandia's History Exceptional service in the national interest

Sandia National Laboratories

- July 1945: Los Alamos creates Z Division
- Nonnuclear component engineering
- November 1, 1949: Sandia Laboratory established

2

Sandia's Role at the Waste Isolation Power Plant (WIPP)

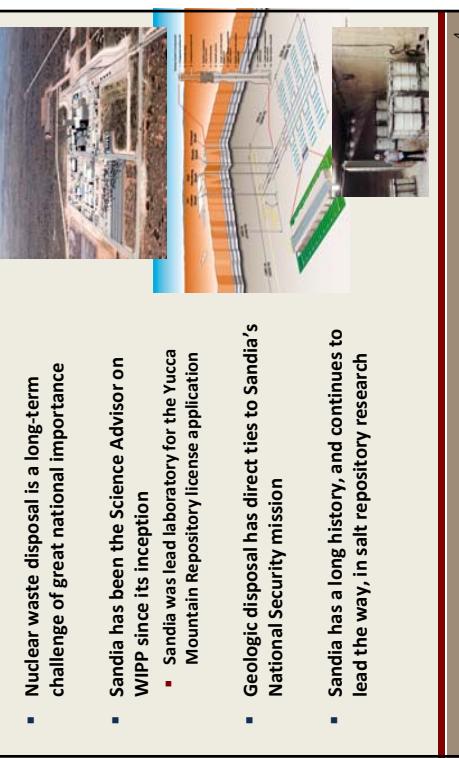

4

Vision and Mission Statements

- On behalf of our nation, we anticipate and solve the most challenging problems that threaten security in the 21st century
- Our unique mission responsibilities in the nuclear weapons program create a foundation from which we leverage capabilities enabling us to solve complex national security problems




5

Sandia's Mission Work Reflects National Security Challenges



Sandia's Mission Work Reflects National Security Challenges

1950s	1960s	1970s	1980s	1990s	2000s	2010s
NW production engineering & manufacturing engineering	Development engineering	Military laboratory	Mission defense work	Post-Cold War transition	Expanded national security role post 9/11	LPPS, Cybersecurity, Proliferation
Vietnam conflict			Cold War	Stockpile stewardship		Evolving national security challenges

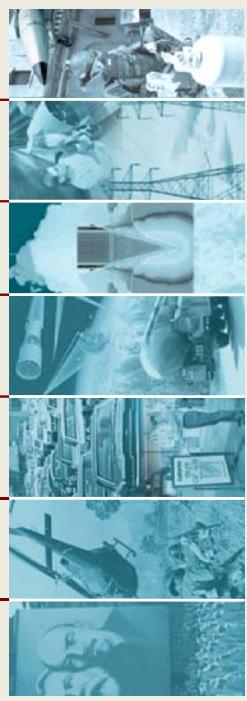

6




Sandia's Foundation



8



Sandia's National Security Mission Areas

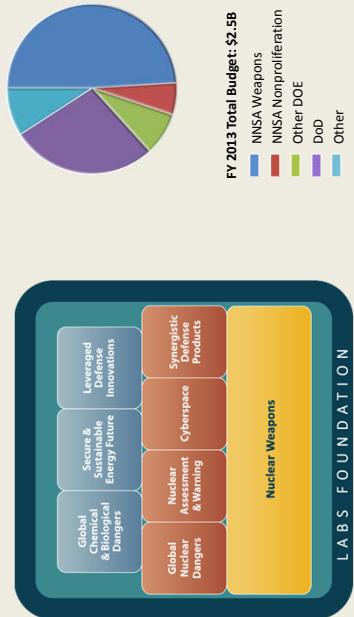

7

Sandia's People

Highly educated workforce

- Strategically managed workforce of diverse skills and competencies
- Modern business practices and operations in support of our missions

R&D staff by discipline

Discipline	Percentage
Mathematics	2%
Chemistry	5%
Physics	5%
Other Science	5%
Other fields	15%
Engineering Sciences	13%
Mechanical Engineering	17%
Computer Science, Computer Engineering	13%
Electrical Engineering	2%
Mathematics	2%

9

Sandia's Discipline-Based Research Foundations

Materials

High energy density physics

Computing science

Engineering Sciences

Bioscience

Geoscience

Microelectronics

10

Sandia's Capabilities

- High-reliability engineering
- Sensors and sensing systems
- Cyber technology
- Reverse engineering
- Micro- & nano- electronics and systems
- Modeling & simulation and experiment
- Natural and engineered materials
- Pathfinders
- Safety, risk, and vulnerability analysis

11

Major Facilities and Tools

Aerospace laboratories (High Altitude Chamber, Ion Beam Lab, Lightning Effects Facility, Mass Dynamics Lab, Modal and Structural Mechanics Lab, ...)

Radiant Heat Test Cell

Non Destructive Evaluation Lab

RF and Optics Microsystem

2 Pulsed Power Facility

Hermes-III Gamma-Ray Facility

Saturn

SPINIX

Solid Mechanics Lab

Mechanics of Materials

Terminal Ballistic Facility

Centrifuge Complex

Water Impact Facility

Environmental Lab (TEMPEST)


Normal Thermal Environment Lab

12

Operations at Sandia



- Operations span research, design, development, prototype, qualification and production activities
- Breadth of work encompasses micro- to macro-scale efforts
- Varying levels of complexity
- Typically involves multiple hazards in combination

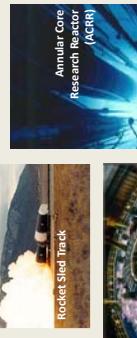

Rocket Sled Track



Annular Core Research Reactor (ACRR)



Lightning Test Facility



Z Machine



Thermal Test Complex

13

Operations “by the Numbers”



- There are 45 major test facilities at Sandia
- We have 2,718 labs (NM and CA only), utilizing 1,827,151 sf (39% of Sandia's Net Square Feet)
- We have 1,958 light labs (NM and CA only) utilizing 1,038,248 sf



Sled Track



Centrifuge



Burn Pool

14

Types of Hazards



- Mechanical
- Electrical
- Chemicals
- Fire Protection/Thermal Hazards
- Pressure/Vacuum
- Radioactive/Fissile/Nuclear
- Biological
- Ozone Depletion
- Drinking Water
- Noise
- Lasers/Non-Ionizing Radiation
- X-Ray Devices
- Explosives & Ammunition
- Confined Space
- Working at Heights
- Heavy Object Ergonomics & Lifting
- ...
- Beryllium

15

Why Engineered Safety at Sandia?




- Previous work planning and control (WP&C) practices were driving a focus on effective conduct of operations
- The underlying technical basis for “design safety features” of an activity could be taken for granted or receive inadequate technical review
- WP&C practices may not have detected technical design flaws affecting the safety of an activity
- Safety needed to be considered in a system engineering context appropriate for an R&D laboratory
- WP&C program was modified to incorporate engineered safety principles

16

What is Engineered Safety?

- A principle-based approach for designing safe “operational systems”
- Safety is an attribute of an operational system achieved by intent
- Operational systems are systematically and critically analyzed to identify ways in which they can fail to perform as intended
- Operational systems are designed and validated to prevent identified failure modes and to mitigate the consequences of a failure should one occur

17

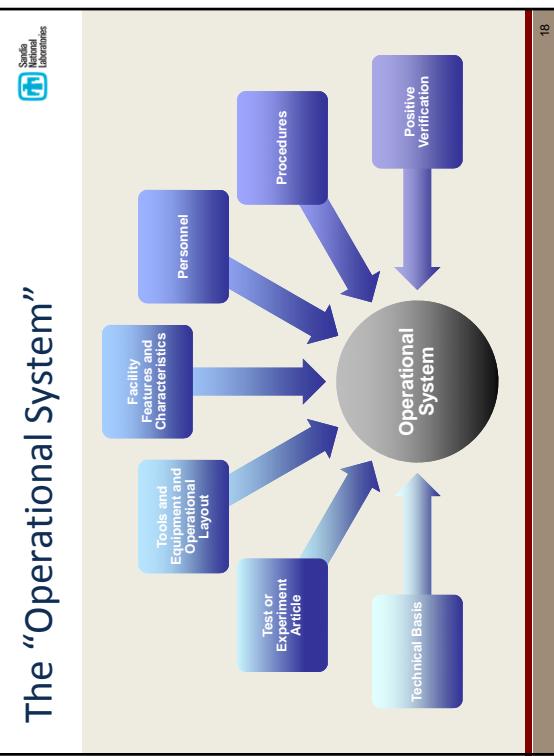

18


Engineered Safety in Six Questions

- What is the system?
- Who is the decision maker?
- What are the unacceptable outcomes?
- How can the system fail to perform as intended and how can I prevent such failures?
- What if the system fails anyway?
- How do you know it will work as intended?

Two documents are shown on the right:

- MAR1521, Work Planning and Control Criteria for Safe Design and Operations**
- Work Planning and Control Criteria for Safe Design and Operations**

20

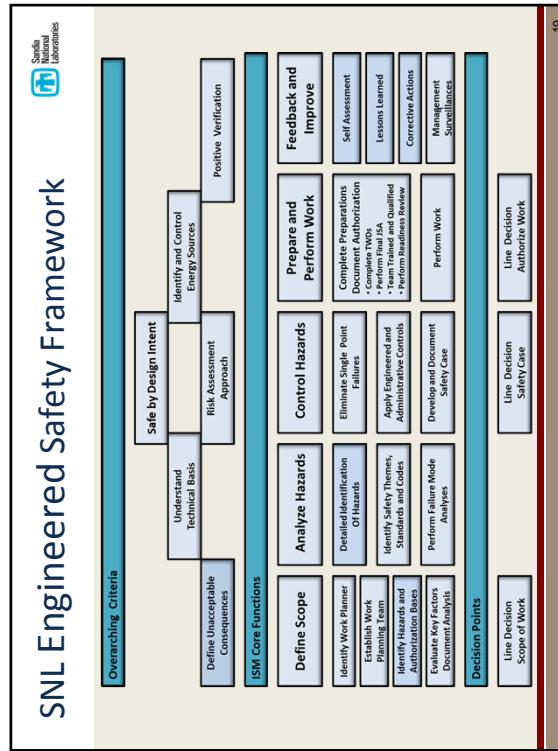

19

Safety Case: A Management Narrative

Explaining how the Criteria are Addressed

- Clearly explains the critical thinking and reasoning in regard to managing the safety risk
- Includes planning for off-normal events
- Demonstrates technical “due diligence” apparent to others technically knowledgeable and familiar with the hazards involved
- Always comes down to a judgment as to whether the controls actually implemented are commensurate with the safety risk
- Is approved at management levels appropriate to the real or perceived risk of the hazardous activity

21

Engineered Safety: Examples



- Bioremediation project
- Polymer R&D laboratory
- Z accelerator containment system


22

Engineered Safety Model Applied to

Bioremediation Project



- Objective: Characterize degradation of environmental contaminants (both energetic and inert), using microbial processes
- Description of work
 - Small quantities of energetic materials dissolved in acetone forming a “stock solution”
 - Samples created, stored and analyzed in biology laboratory
- Major hazards
 - Energetic materials
 - Microorganisms and/or biological toxins
 - Mechanical hazards (centrifuges)
 - Thermal/pressure hazards (autoclave)
 - Chemicals

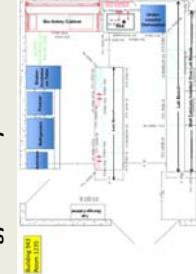

23

Elimination of a Hazard through Application of Critical Thinking



- Determined maximum credible event: Inadvertent initiation of energetic compounds during handling, mixing, or testing
- Identified unacceptable consequences
 - Individual illness, injury
 - Mission impact greater than 6 weeks
 - Adverse effect on the community
- Identified and implemented solutions
 - Required explosives training for lab workers, consulted with SME
 - Weighed/pre-mixed energetic materials in separate laboratory
 - Reduced volume of material samples

“By applying critical thinking, we redesigned our experiments such that through dilution, we eliminated the hazard associated with the procedure in a manner that still enabled us to meet our experimental objectives.”

24

Engineered Safety Model Applied to Polymer R&D Laboratories

Sandia National Laboratories

- Applied materials research and prototyping laboratories perform activities including surface preparation, coating, encapsulation, casting, bonding, curing and polymer formulation in multiple laboratories
- Multiple laboratories located in several buildings support breadth of work

25

Critical Review of Multiple Operations Enhanced Lab Safety

Sandia National Laboratories

- Identified unacceptable consequences
 - Acute or chronic injury/illness from exposure to toxic chemicals
 - Injury from mechanical hazards (machine tools, hand tools, lifting heavy objects)
- Reviewed possible sources of concern
 - Chemical spills (pouring, transport or storage)
 - Spill or splatter during mixing
 - Underestimation of exotherms
 - Uncertain equipment failure modes
- Implemented solutions
 - Verified that equipment "fails safe"
 - Incorporated secondary containment systems
 - Used modeling to determine proper quantities

Assure proper ventilation & storage

26

Engineered Safety Model Applied to Plutonium Experiments in the Z facility

Sandia National Laboratories

- Earth's most powerful pulsed-power facility and X-ray generator (26MA)
- Essential to nuclear weapon stockpile stewardship
- Used to measure properties of plutonium at extreme pressures and temperatures

27

System Designed and Fielded to Assure Safe and Successful Experiments

Sandia National Laboratories

- Identified unacceptable consequences
 - Radiation dose to a worker
 - Environmental contamination
 - > 6 month pause in operation
- Conducted failure mode effects and fault tree analyses
- Identified and implemented solutions
 - Eliminated failure modes
 - Provided positive assurance through 18 formal approvals for critical subsystems prior to key activities in the shot setup timeline
 - Designed a secondary system to manage a containment breach safely

28

“Every Day Safe” with a Critical Thinking Mindset

Sandia National Laboratories

- Broadens application of engineered safety principles to beyond the laboratory or test facility, i.e., in “everyday life”
- Based on three simple questions:
 - What could go wrong?
 - How can I prevent it?
 - How can I prepare for the unexpected?
- By using these three questions routinely to think critically about day-to-day activities, we can eliminate conditions or situations that lead to accidents
 - With a little practice, this critical thinking mindset will become a habit

29

Closing Remarks About Engineered Safety at Sandia

Sandia National Laboratories

- Integrates safe designs with effective conduct of operations
- Establishes a credible technical basis for safety in work
- Easier to understand and use by an R&D organization
- Creates increased and more effective management engagement
- Further matures and improves the Laboratories’ safety culture
- Expands to encourage critical thinking in daily life

30


Outline

Leading Question:
How is operational safety ensured in practice?

- Managing Operational Safety
 - Basis for Operational Safety
 - Architecture for Operational Safety
 - Managing Pre-closure Hazards
 - Mitigating the Consequences of Hazards
 - Protecting People in Case of Hazards
 - Summary

T. v. Berlepsch

- Basic Considerations for Repository Operation

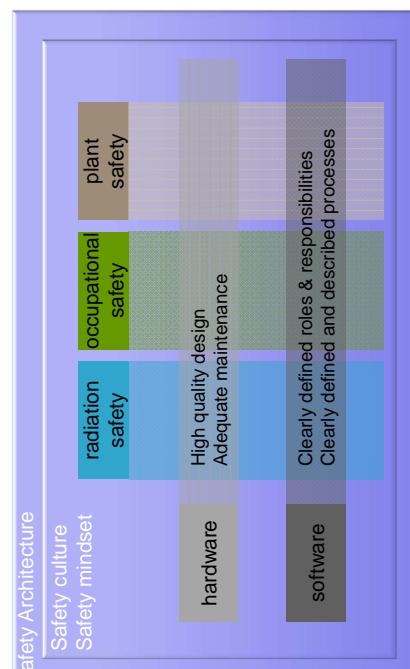

DBETEC
Data TECHNOLOGY United
T. v Berndes
USGerman Workshop 2014

National Laboratories

Operational Safety Activities in Germany



DAVCO

Sandia National Laboratories

DBETEC
DRE TECHNOLOGY GmbH


Project Management Agency Kalkar
Fachhochschule Kalkar

PTKA
Project Management Agency Kalkar
Fachhochschule Kalkar

U.S. DEPARTMENT OF ENERGY

Baldwin National Laboratories is a multi-program laboratory managed and operated by Battelle Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC02-99DO-30000.


Managing Operational Safety: Legal Basis

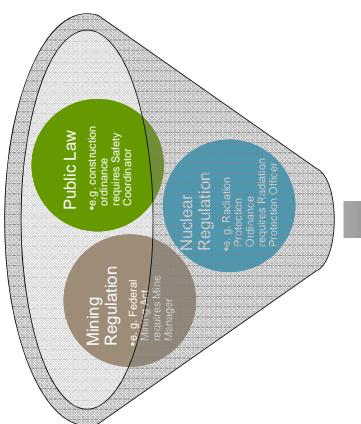

Technical and Operational Requirements for the Operation of a Repository


T. v. Berlepsch
USIGerman Workshop 2014

= Basic Considerations for Repository Operation =



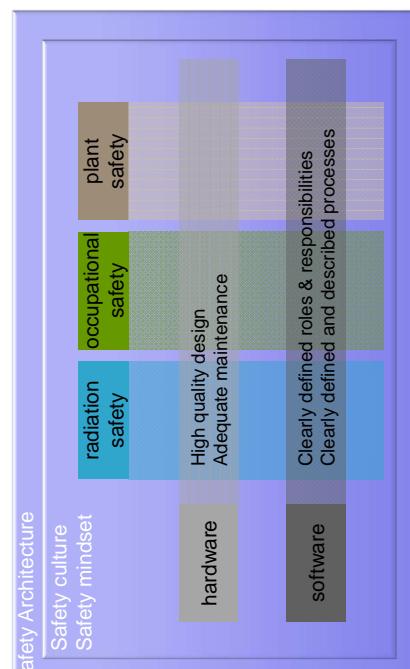


DBETEC
Data TECHNOLOGY United
T. v Berndes
USGerman Workshop 2014

Managing Operational Safety: Legal Basis

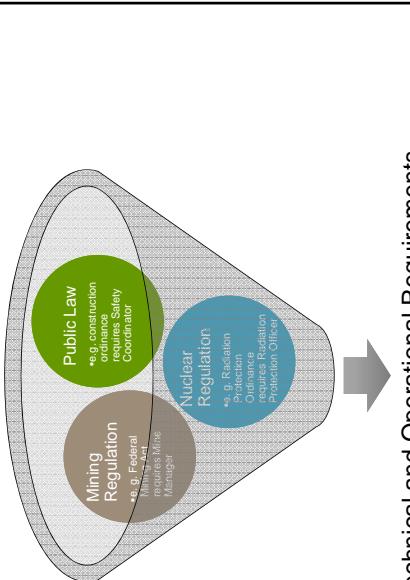

DIBETEC
D&T TECHNOLOGY GmbH
Innovations
by Tradition

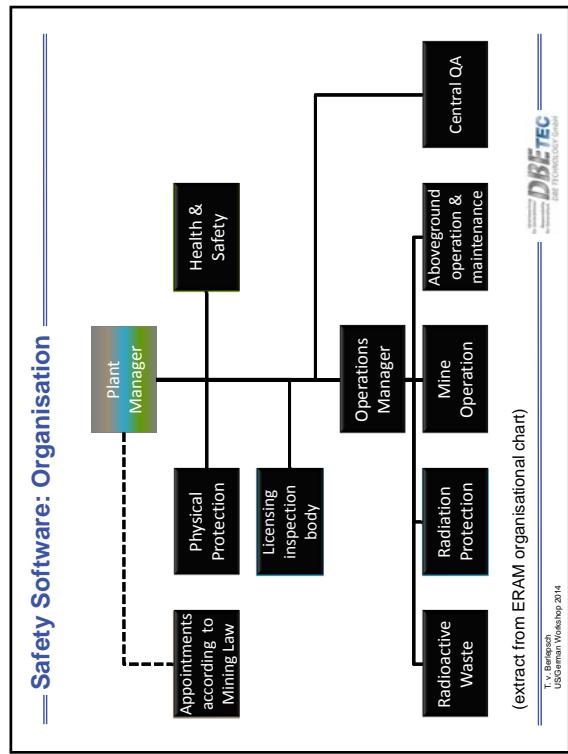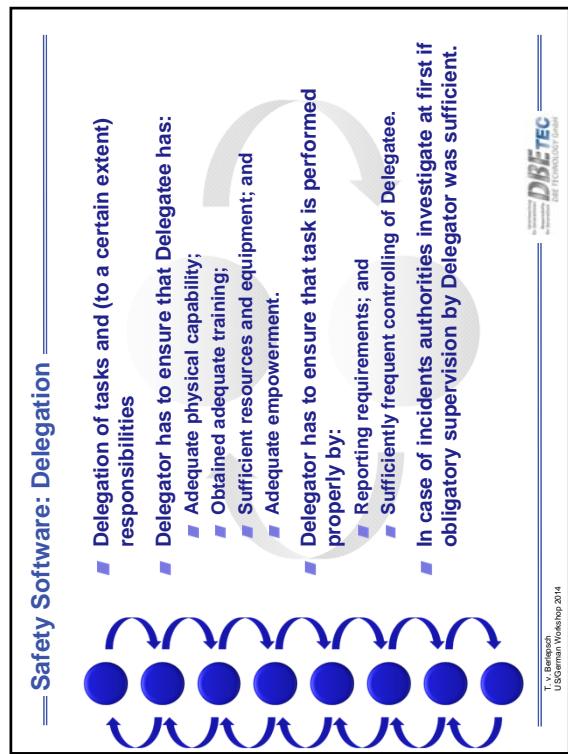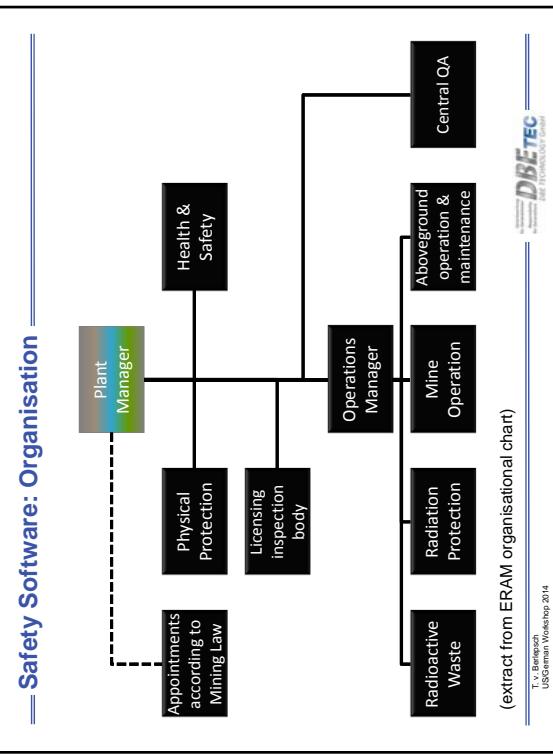

== Safety Housing: Ensuring Safety Culture and Mindset ==

- Adequate information on all levels by joint fixes, e.g.:
 - 05.30 am: Sub-foreman from all divisions
 - 07.00 am: Foreman; Plant manager; Geologist; Surveyor
 - 01.00 pm: All divisions incl. eg. PR)
- Delegators visit all workplaces in her/his responsibility adequately frequently
 - Learning about issues, needs, ...
 - Caring about staff
 - Assuring performance of delegates
- Staff and management at eye level
 - Equality and trust ensures identification with company culture and mindset
- Regular instructions in tools and personal safety equipment:
 - necessary abilities to perform work
 - necessary abilities to use emergency equipment
 - adequate risk awareness
- Training to obtain and maintain necessary skills
 - Training plan is submitted to (but neither approved nor checked by) authorities

T. v. Biergesch
US/German Workshop 2014

DBE TEC
Baltic Technology GmbH

== Managing Pre-closure Hazards ==

- Despite planning for and realisation of a safe operation (even when proofed with an outstanding safety record), hazards can't be excluded
- Dominating hazards to consider:
 - Radiological events;
 - Fire hazards.
 - Fundamental mitigating means
 - Protecting people;
 - Mitigating the consequences of hazards.

T. v. Biergesch
US/German Workshop 2014

DBE TEC
Baltic Technology GmbH

== Protecting People in Case of Hazards ==

- Adequate training and instruction
- Adequate design of emergency plans and measures
 - Limited time to rescue people;
 - If necessary, provision of refuge chambers;
 - Regular testing and maintenance of equipment;
- Ensuring fast intervention rescue brigade
 - Leader is assigned according to mining law;
 - Reports directly to plant manager;
 - Voluntary brigade receiving specific training;
 - Surveyed and trained by Mining Association.

T. v. Biergesch
US/German Workshop 2014


DBE TEC
Baltic Technology GmbH

== Mitigating the Consequences of Hazards ==

- Enable early detection of hazards
 - eg. use of sniffers.
- Early mitigation of risks
 - eg. mobile fire extinguishers.
- Keep hazards locally confined
 - Electronic on-time ventilation guiding system for mapping flow rates, pressures, and temperatures in the entire mine;
 - Placement of ventilation barriers at precalculated positions;
 - Reduction of fresh air supply.
- Prevention of access to hazard source
 - In case of radiological hazard risk of contamination;
 - In case of fire danger to suffocate or 'boil'.

T. v. Biergesch
US/German Workshop 2014

DBE TEC
Baltic Technology GmbH

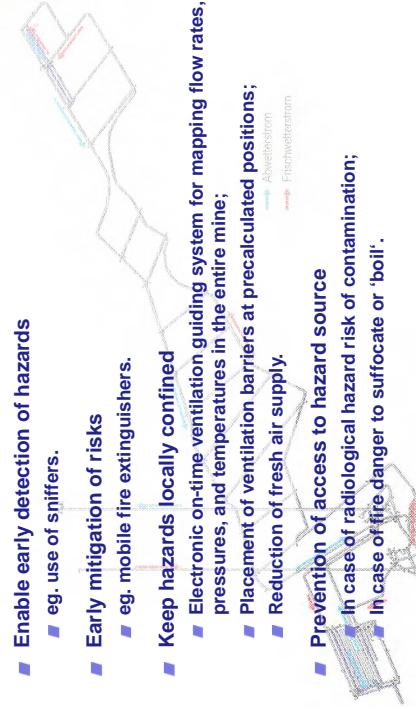

Summary

- Safe operation of a plant has to be considered holistically
 - High quality equipment as 'hardware';
 - Sufficient processes as 'software'; and
 - Right mindset as 'housing' for safety.
- However, hazards can't be excluded, but mitigated by
 - Ensuring the safety of people;
 - Enabling Means to mitigate the consequences of hazards.

T. v. Berndesbach
US/German Workshop 2014

DBE TEC
DBE Technologie GmbH



**Thank You
for Your Attention!**

T. v. Berndesbach
US/German Workshop 2014

DBE TEC
DBE Technologie GmbH

Operational Safety at U.S. Repositories

Ernest Hardin

Sandia National Laboratories, Albuquerque, NM USA

Gerald Nieder-Westermann

DBE TEC GmbH, Peine, Germany

Abstract

Operational safety analysis for geologic repositories has been in transition over the past decade, with respect to the assessment of hazards and initiating events, to rely more on probabilistic methods. Nuclear power plants have traditionally been analyzed and licensed by compiling hazards and initiating events, analyzing the hazards and consequences of events, and emphasizing feedback into the "safety basis" including design, operation, and administrative controls. Efforts have been made to consider event likelihood and consequences together in a risk context, but without probabilistic aggregation for direct comparison to regulatory dose standards. A shift to a probabilistic approach is incorporated in the U.S. safety regulation specific to a Yucca Mountain repository (10 CFR Part 63). The approach is evolutionary in that event compilation, sequence development, and hazard analysis are performed using traditional methods, combined with probability estimation under uncertainty, and explicit simulation of dose consequences for comparison to quantitative, regulatory screening criteria. The different approaches are compared using examples from U.S. Department of Energy nuclear facility safety analysis (e.g., WIPP Documented Safety Analysis) and the Yucca Mountain License Application. In Germany deterministic methods also have a long history in safety case scenario analysis, but probabilistic methods are increasingly used as a complementary tool for screening events and hazards. This review with examples shows that operational safety analysis is changing, at the same time that safety experience is accumulating at existing facilities. There are significant opportunities to benefit from international cooperation in methodology development and demonstration, and in safety analysis implementation with feedback to system design and operational controls.

Sandia National Laboratories is a multi-program laboratory operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

SAND2014-17181A

Exceptional service in the national interest

Operational Safety at US Repositories

Probabilistic and deterministic approaches, and technical vulnerabilities

E.L. Hardin, Sandia National Laboratories

G.-H. Nieder-Westermann, DBE TEC GmbH

September 2014

S⁵ INTERNATIONAL US/German Workshop Salt Repository Research, Design, & Operation, Sandia, NM

Sandia National Laboratories

DBE TEC

PTKA Project Management Agency Karlsruhe

DOE Department of Energy

NASA National Aeronautics and Space Administration

Yucca Mountain, Nevada (10 CFR Part 63, U.S. Nuclear Regulatory Commission)

Aggregated repository worker dose (10 CFR Part 20, U.S. NRC)

Dose at or beyond site boundary (10 CFR Part 63, U.S. NRC)

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94ER41132. Sandia has a 45.7% ownership interest in PTKA.

Operational Safety at U.S. Repositories

Outline

- Deterministic vs. Probabilistic (finding balance)
- Deterministic Safety Analysis at U.S. Department of Energy (DOE) Facilities (e.g., Waste Isolation Pilot Plant, WIPP)
- Overview of Yucca Mountain Preclosure Safety Analysis (PCSA)
- Current German Approach for Licensing of Repositories
- Technical/Regulatory Vulnerabilities
- Summary and Outlook

U.S.-German Workshop on Salt Repositories

2 Operational Safety (SAND2014-17182PE)

Probabilistic vs. Deterministic Finding Balance for Operational Safety Analysis

- **U.S. Repositories for HLW/SNF (deterministic ↔ probabilistic)**
 - Disposal of High-Level Radioactive Wastes in a Geologic Repository at Yucca Mountain, Nevada (10 CFR Part 63, U.S. Nuclear Regulatory Commission)
 - Aggregated repository worker dose (10 CFR Part 20, U.S. NRC)
 - Dose at or beyond site boundary (10 CFR Part 63, U.S. NRC)
- **German Repositories (deterministic ↔ probabilistic)**
 - Safety Requirements Governing the Final Disposal of Heat-Generating Radioactive Waste (Sicherheitsanforderungen)
 - Requires both deterministic and probabilistic assessment
 - Requires implementation of nuclear power plant requirements for operational safety

3 Operational Safety (SAND2014-17182PE)

Deterministic Safety Analysis U.S. DOE Nuclear Facilities (1/4)

- Hazards to workers, the public, and the environment
- Transuranic Waste (DOE, not NRC regulated)
- Deterministic (DOE Order 5480.23 - SAR)
 - Similar to civilian power plant licensing (NRC 10CFR Part 50)
 - Design basis (normal, accidents, events)
- Facility Nuclear Hazard Category (complexity and inventory)
 - Risk Category 1: Potentially significant off-site consequences (e.g., reactor)
 - Risk Category 2: Potentially significant on-site consequences (e.g., WIPP with >80 Ci Pu-239 per container)
 - Risk Category 3: Localized (facility) consequences (e.g., accelerator)

4 Operational Safety (SAND2014-17182PE)

Deterministic Safety Analysis

U.S. DOE Nuclear Facilities (2/4)

- Graded Approach for Each Credible Hazard Identified (DOE STD 5506-2007)
 - Magnitude of hazards, complexity of facilities, life-cycle state
 - Example: WIPP Documented Safety Analysis

ACCIDENT/EVENT DOSE CONSEQUENCE GUIDELINES*			
Consequence Level	Maximally Exposed Offsite Individual	Co-Located Worker (at 100 m)	Facility Worker
High	Approaching 25 rem	>100 rem	Safety Significant (DOE STD 3009) Qualitative; no threshold
Moderate	≥1 rem	≥25 rem	Qualitative; no threshold
Low	<1 rem	<25 rem	Qualitative; no threshold

ACCIDENT/EVENT RISK CLASS*

Consequence Level	Beyond Unlikely <10-4/yr ^a	Extremely Unlikely 10-4 to 10-3/yr	Unlikely 10 ⁻² to 10 ⁻¹ /yr	Anticipated 10 ⁻¹ to 10 ⁻³ /yr
High	II	II	I	I
Moderate	IV	III	II	II
Low	IV	IV	III	III

^a Probability of 10⁻⁶ calculated conservatively, or 10⁻⁷ calculated realistically.

* Not to be construed as regulatory acceptance criteria, per DOE STD 5606-2007.

5 Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Deterministic Safety Analysis

U.S. DOE Nuclear Facilities (3/4)

- Hazard/Accident Analysis → Material-at-Risk → Hazard Evaluation (prevention, mitigation) → Design Basis
- “Hazard Evaluation” → Technical Safety Requirements
 - Identify Safety-Significant systems, structures and components
 - Administrative controls
- Develop Prevention/Mitigation Controls
 - Examples: waste loading, waste transport, etc.
- Identify Representative Hazards for Further Analysis as Design Basis Events (DBEs)
- Analyze Beyond-Design-Basis Events
 - Low-probability, high consequence

6 Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Deterministic Safety Analysis

U.S. DOE Nuclear Facilities (4/4)

- Example: WIPP Risk Ranking
 - Contact-handled waste, underground events

Event #	Description	Frequency (mitigated)	Consequence (mitigated)	Risk Class
		MOI ^a	Co-Located Facility Worker	Facility Worker
CH-U-G-1-001a	Single-vehicle fire underground during waste transport	10 ⁻⁴ to 10 ⁻³ /yr	M	M
CH-U-G-1-002a	Collision of 2 vehicles and fire underground during waste transport	10 ⁻⁴ to 10 ⁻³ /yr	L	M
CH-U-G-1-003a	Single-vehicle collision, fire underground at waste face	10 ⁻⁴ to 10 ⁻³ /yr	H	L
CH-U-G-6-001a	Internal deflagration in CH waste container underground	10 ⁻² to 10 ⁻¹ /yr	L	H
			II ^b	IV
			III	IV
			IV	IV

^a MOI = Maximally Exposed Off-Site individual. A Risk class of I may be unacceptable and I-1 may be marginally acceptable, for the MOI. Source: WIPP Documented Safety Analysis, DOE/WIPP 07-3272, Rev. 4.

^b II = II^b

7 Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Overview of YM PCSA (1/4)

Probabilistic Approach (YM, Part 63)

- “What can go wrong?”
 - A set of scenarios or event sequences
- “How likely is it?”
 - Compile available evidence including historical records, engineering analysis (e.g., fragility, reliability) and expert judgment
- Use event sequence diagrams to estimate the probability of unlikely scenarios, with uncertainty
- “What are the consequences?”
 - PCSA Consequences: Directly calculate dose to off-site public, dose to on-site workers and public, criticality
 - Explicit dose limits are defined by decision-makers (e.g., U.S. NRC regulations: 10 CFR Part 63 for YM)

8 Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Overview of YM PCSA (2/4)

Some Differences Using 10 CFR 63 Compared to Previous, Deterministic Nuclear Power Plant Licensing:

- **Category 1 (expect ≥ 1 over ~100 years) dose limits for public**
 - Aggregated over normal operations and all Category 1 events*
 - Onsite dose: 100 mrem/yr (5 rem/yr for workers; see 10 CFR Part 20)
 - At site boundary: 15 mrem/yr* or 2 mrem/hr
 - Beyond site boundary: 100 mrem/yr or 2 mrem/hr
- **Category 2 (expect < 1 but ≥ 10⁻⁴ over ~100 years)**
 - Event sequences categorized individually on probability only, not risk*
 - At or beyond site boundary, for each sequence: 5 rem (workers or public*)
 - Onsite dose: Not regulated
- **No criticality allowable for Category 1 and 2 event sequences**
- **No consequence analysis needed for "Beyond Category 2"**

9

Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Overview of YM PCSA (3/4)

- **Initiating Events**
 - Internal (process diagrams, hazard/operability)
 - External (experiential)
- **Event Sequences**
 - Screen on probability of initiating events
 - Logic diagrams, hazard analysis, fault trees
 - Simulate hazards, fragilities, etc.
 - Quantify event sequences (SAPHIRE)
 - Categorize [1, 2 and/or Important to Criticality]
- **Dose Consequence Analysis**
 - Normal + Category 1, aggregated (workers and public)
 - Category 2, individual events $p > 10^{-4}$ in ~100 years (public)
- **Design Interface**
 - Identify items "Important to Safety" ("Q-List")
 - Develop as-low-as-reasonably achievable (ALARA) requirements for normal operations and Category 1
 - Develop design basis (iterate on design)

10

Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Overview of YM PCSA (4/4)

- **Preliminary Dose Summary for YM PCSA**
 - Aggregated for normal operations + Category 1 (expect ≥ 1 in ~100 years)
 - Each Category 2 event sequence analyzed individually

Category	Standard	Limits	Results
Public onsite	Normal operations + Category 1	100 mrem/yr TED ^A	78 mrem/yr
Public at site boundary	Normal operations + Category 1	15 mrem/yr TED	0.05 mrem/yr
Public beyond site boundary	Normal operations + Category 1	100 mrem/yr TED	0.11 mrem/yr
Radiation workers	Normal operations + Category 1	5 rem/yr TED	1.3 rem/yr
Public at site boundary	Any Category 2 event sequence	5 rem TED	0.01 rem
Public beyond site boundary	Any Category 2 event sequence	5 rem TED	0.03 rem

^A TED = Total Effective Dose Equivalent (see Parts 20 and 63 for individual organs. Peak dose rate limits* or results, and airborne emissions of radioactive material to the environment, are not shown. DOE/RW-0573, Rev. 1, Table 1.8-36.
Source: Yucca Mountain Repository Safety Analysis Report, DOE/RW-0573, Rev. 1, Table 1.8-36.

11
Operational Safety (SAND2014-17182PE)
U.S.-German Workshop on Salt Repositories

Current German Approach to Repository Operational Safety Analysis

- **Probabilistic Safety Analysis is Used in Germany to Identify/Quantify Event Sequences**
 - Initiating events that cannot be controlled by design
 - Supplement deterministic safety assessments
 - Analyze high-consequence events
 - Sensitivity analysis; effectiveness of prevention/mitigation measures
- **PSA is Required for Repository Licensing to Supplement Deterministic Assessments, But Limits Have Not Been Defined**
- **Guidelines for Implementing PSA in Nuclear Power Plant Operational Reviews Were Developed in 2005 (BfS)**
- **Similar PSA Provisions Specific to a HLW Repository Will Likely Be Incorporated After Codification of the Site Selection Decision (by 2031, per the Site Selection Act of July, 2013).**

12
Operational Safety (SAND2014-17182PE)
U.S.-German Workshop on Salt Repositories

Regulatory Vulnerabilities	
■ Larger Repositories	<ul style="list-style-type: none">– Factor of 2 to 3 range in waste inventory is possible
■ Longer-Operating Repositories	<ul style="list-style-type: none">– 50 years operation vs. → 150 years
■ More Waste Packages	<ul style="list-style-type: none">– YM (~11,000) vs. all U.S. SNF (up to 90,000)
■ Completeness of Initiating Events/Sequences	
■ Feedback to Design & Operations	
■ Methodological	
– Disaggregation	
– Representational Accuracy	

13

Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Disaggregation Dilemma Caused by Probabilistic Approach (10 CFR 63)	
■ Level of Aggregation (resolution) of Initiating and Pivotal Events Represented in a Sequence Can Determine Categorization Probability, esp. Internal Events	<ul style="list-style-type: none">– More Aggregation → Higher Probability Event Sequence– More Resolution (less aggregation) → Lower Probabilities → More Analysis/Licensing Effort
■ Example: Impact and Breach of Canister	<ul style="list-style-type: none">– Should a single event sequence include all drops of all types of canisters from all possible sources in all facilities?
■ Important for Risk Management (feedback into design & operations):	<ul style="list-style-type: none">– Hardware reliability requirements– Operations/procedures

14

Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

Representational Accuracy	
■ Criterion for level of aggregation is representational accuracy	
■ Separation into different event sequences warranted because of variations of:	
– Facility configuration and operations (leading to different challenges, e.g. lift heights, number of lifts, residence time)	
– Equipment (although some equipment is similar across facilities, the complement of equipment is different for each facility)	
– Waste forms and containers (variation in robustness over different casks and canisters and variation in source terms because of different fuel/form of fuel)	
■ Disaggregation should represent different waste processing functions, waste forms, containers and facilities	
– For example: receipt, preparation, transfer, welding, load-out, transport, and emplacement	

15

Operational Safety (SAND2014-17182PE)


U.S.-German Workshop on Salt Repositories

Summary and Outlook	
■ Deterministic vs. Probabilistic, in Transition (finding balance)	
■ Accumulating Experience with Nuclear Safety Analyses	
■ Periodic Updates for Operating Facilities	
■ Regulatory Developments are Imminent in Germany & the U.S.	
– Siting process, conceptual design and suitability determination	
– Re-promulgation of generic repository regulations	
■ New Systems Important to Nuclear Safety, and Supporting Analyses	
– Conveyances, packaging, etc.	
■ International Cooperation is Vital to Confidence Building	
– Events/sequences	
– Feedback to design & effective operations	
– Methodology	

16

Operational Safety (SAND2014-17182PE)

U.S.-German Workshop on Salt Repositories

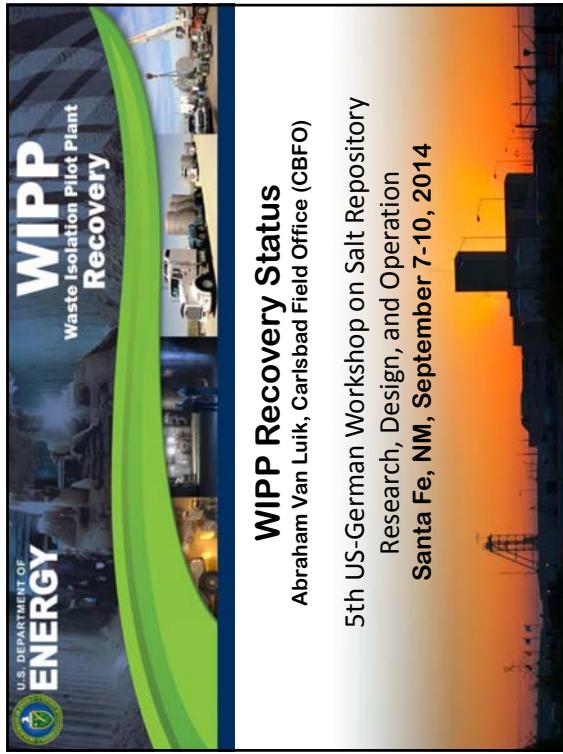


U.S. DEPARTMENT OF ENERGY

WIPP
Waste Isolation Pilot Plant
Recovery

Abraham Van Luijk, Carlsbad Field Office (CBFO)

5th US-German Workshop on Salt Repository
Research, Design, and Operation
Santa Fe, NM, September 7-10, 2014

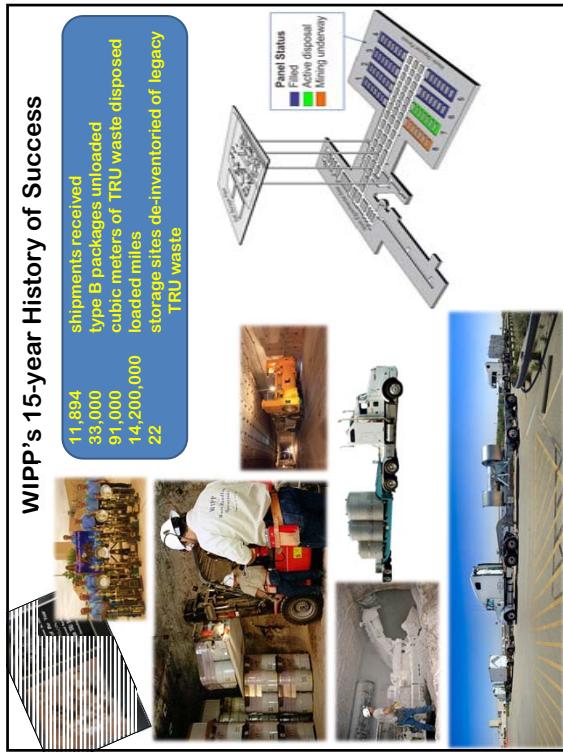


WIPP's 15-year History of Success

11,894 shipments received
type B packages unloaded
33,000 cubic meters of TRU waste disposed
91,000 loaded miles
14,200,000 storage sites de-inventoried of legacy TRU waste

Panel Status
Filled (blue)
Active disposal (green)
Mining underway (orange)

Collage of WIPP operations: workers in protective gear, mining equipment, waste disposal, and a control room monitor.

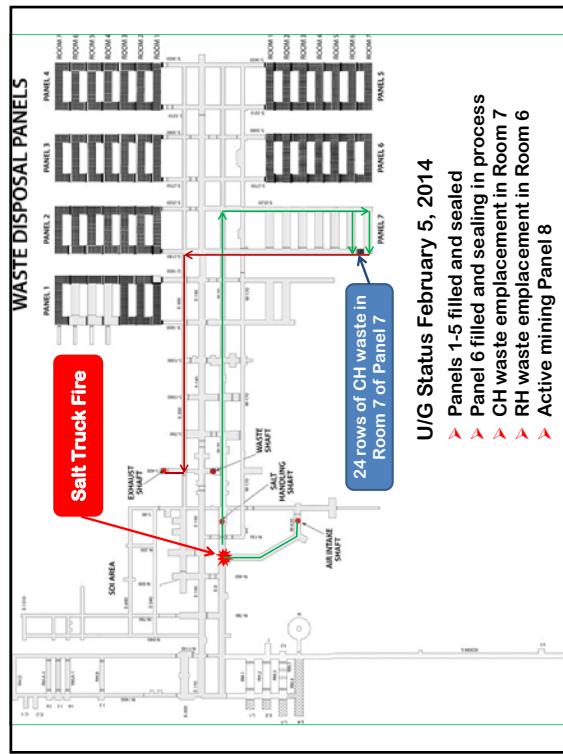


The Accident

On February 5, 2014, at approximately 11:00 AM, the Waste Isolation Pilot Plant in Carlsbad, New Mexico suffered an underground fire in a salt hauler vehicle. There were 86 people in the mine at the onset of the fire; all exited the mine safely. Six personnel were transported to the Carlsbad Medical Center for smoke inhalation, and an additional seven personnel were treated on-site.


The EIMCO Model 9BS-15 ton hauler truck is a diesel powered vehicle used to haul salt from the mine. This is an aged piece of equipment, approximately 23 years old.

February 5, 2014

Pre-disposal truck

WIPP Underground Fire Investigation Summary
February 5, 2014
Ted Woda
Project Manager, Accident Investigation Board
March 2014

ENR - One Year Later

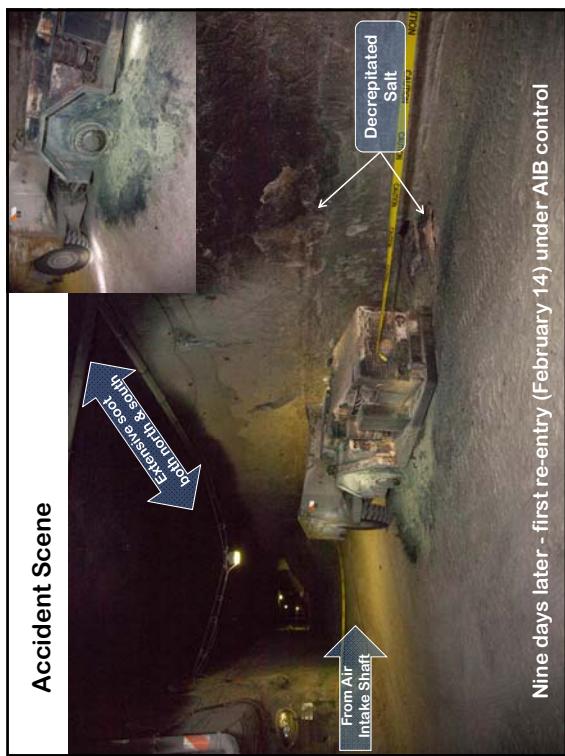

AIB Report Findings

- Maintenance program was ineffective
- Fire protection program was less than adequate
- Nuclear facility versus mine culture

Hydraulic Leak under Sister Vehicle

Airlock Doors Wired Open

Combustible Loading in U/G





AIB Report Findings

- Emergency management & preparedness and response program were ineffective (several repeat issues from external reviews)
- CMR response (evaluation and protective actions) were less than adequate
- Different treatment of waste vs. non-waste handling equipment, e.g. combustible buildup, manual versus automatic fire suppression system, fire resistant hydraulic oil, etc.

Abandoned and Discarded Self Rescuers

CH Waste Face: Room 7 of Panel 7, Mid-day February 14

Nine days after the fire - Single re-entry on Feb. 14 under AIB control

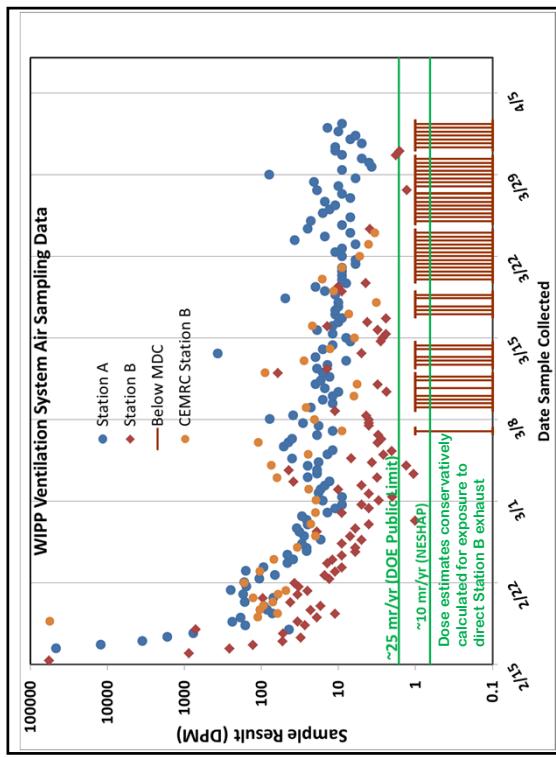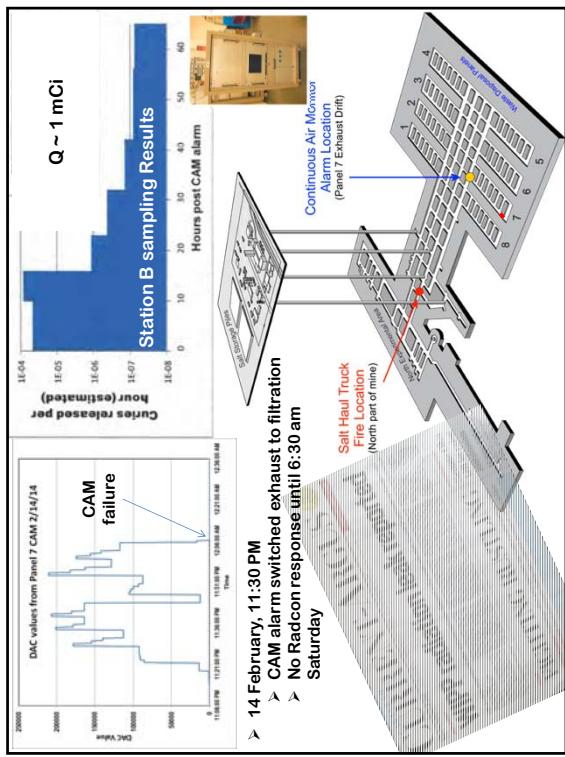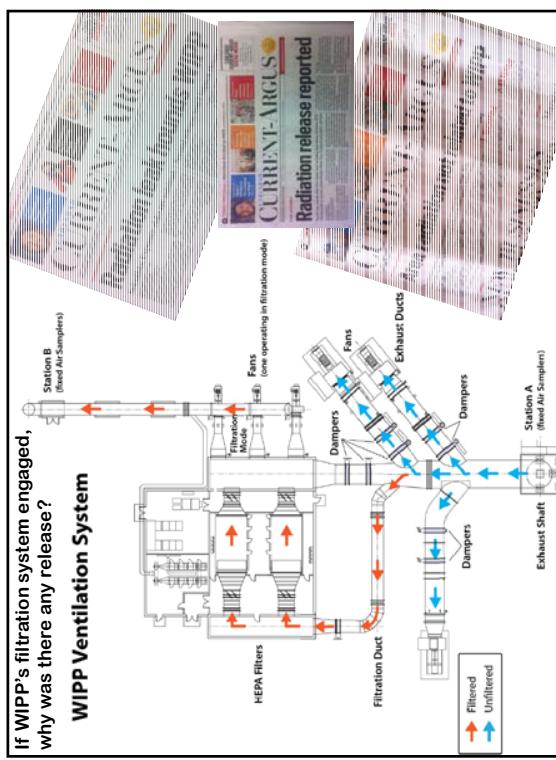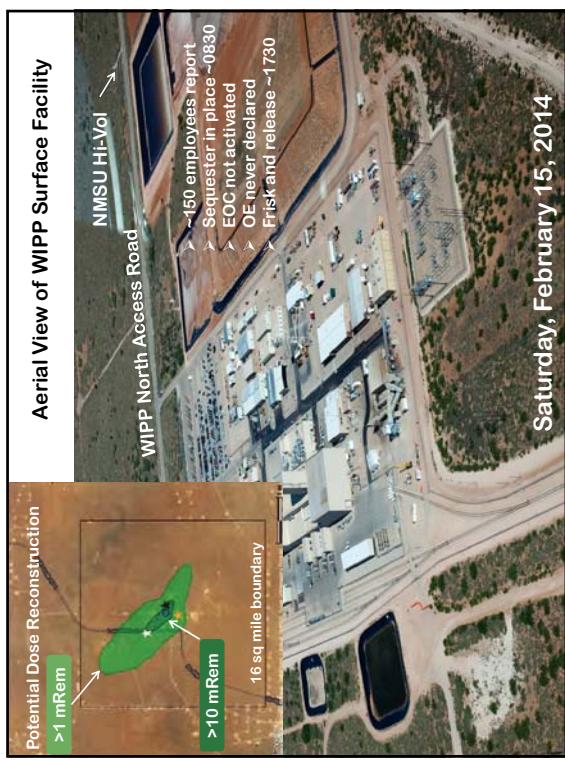

AIB issues Phase 1 report on the radiation release event April 24, 2014

Phase 1 focused on the release of radioactive material from underground to the environment and the follow-on response to the release:

- Board reviewed the adequacies of the safety management programs and systems.
- Important to report on Phase 1 to maintain transparency and move quickly on the corrective actions.
- Phase 2 will focus on the direct cause of the release of the material and the impact on worker protection in the underground.

Pre-draft
DOE/NNSA Environmental Management
EMERGENCY ENERGY

WIPP Underground Radiological Event Investigation Summary
February 14, 2014

Test Works
Chairman, Accident Investigation Board
March 6, 2014

Pre-Definitive Draft

OFFICE OF ENVIRONMENTAL MANAGEMENT

Phase I AIB Report Conclusions

Nuclear Safety Program: Ineffective

- Misclassified safety class of the ventilation system and CAMs
- Non-conservative DSA and TSR controls

Maintenance Program: Ineffective

- Key components and systems inoperable or unreliable

Radiation Protection Program: Ineffective

- Delayed response, contamination control, surveys, and training


Emergency Management Program: Ineffective

- Not effective in prompt categorization, implementation, required notifications

Conduct of Operations: Key elements ineffective

Safety Culture and Oversight:

- Nuclear facility versus mining culture. Difference in expectations
- NWP safety culture does not embrace ISMS
- NWP contractor assurance system and CBFO oversight ineffective
- EM HQ line management ownership and oversight were ineffective

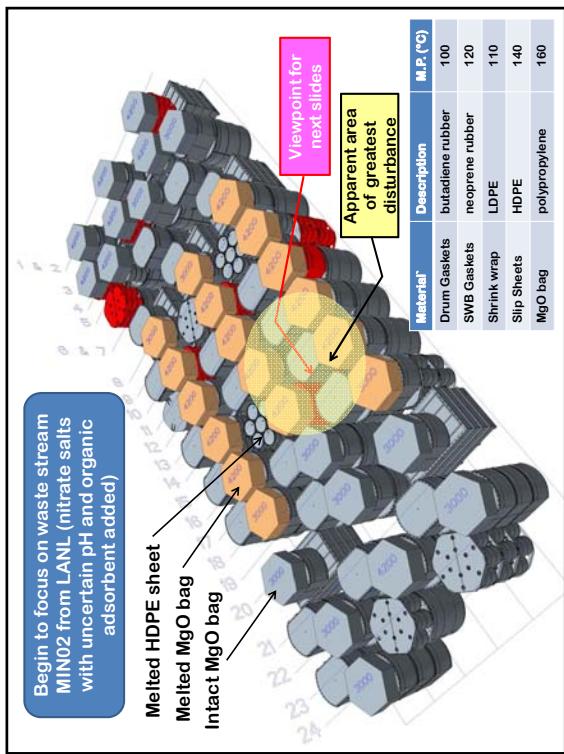

Release Cause Investigation Continues

- Phase 2 Accident Investigation Board report on cause of the release not yet completed
 - What is known from underground air particulate and swipe sample analyses:
 - The material that was released appears to be generated by a combustion (rapid chemical oxidation) process
 - Its chemical and radiological signatures are similar to the waste stream in the breached waste container that contained nitrate salts and organics in a very acidic matrix
 - Am to Pu ratios were about 10:1, which is a distinctly different ratio from the bulk of the waste in the repository
 - Suspect waste has been re-classified as ignitable

18



Activities Required for WIPP Restart


Near term:

- Upgrade Documented Safety Analysis; fire and safety systems
 - Uncontaminated and contaminated areas established;
 - Ground control fully functioning (roof bolting catch-up);
 - Procure temporary filtered ventilation capacity using skid HEPA filters;
 - Design activity: permanent ventilation changes, new exhaust shaft; Mine characterization and decontamination;
- Mid term:
- Install/operate skid fans/HEPA filters;
 - Design/Permit permanent ventilation system and new exhaust shaft;
 - Begin initial operations/emplacement using existing panels;
 - Supplemental ventilation on air intake shaft;
 - Three shifts to optimize use of available ventilation capacity;
 - Further upgrade above and below ground utility/safety systems;
- Long term:
- Construction of permanent ventilation system and new exhaust shaft;
 - New salt shaft and ventilation system operational;
 - Operational Readiness Reviews;
 - Begin full operations/waste-emplacement;
 - Potential shift to utilize some electric mining equipment

19

Recovery is In Progress

- Each of the Accident Investigation Board conclusions and recommendations for cultural and technical changes is being implemented
- The underground facility is being rehabilitated:
 - Decontamination where needed and feasible to allow underground work to resume in stages
 - Additional clean air supply and exit air filtration capacity is being implemented
 - Areas with suspect waste are planned to be isolated from the working repository as soon as practicable
- A draft detailed Recovery Plan is under review

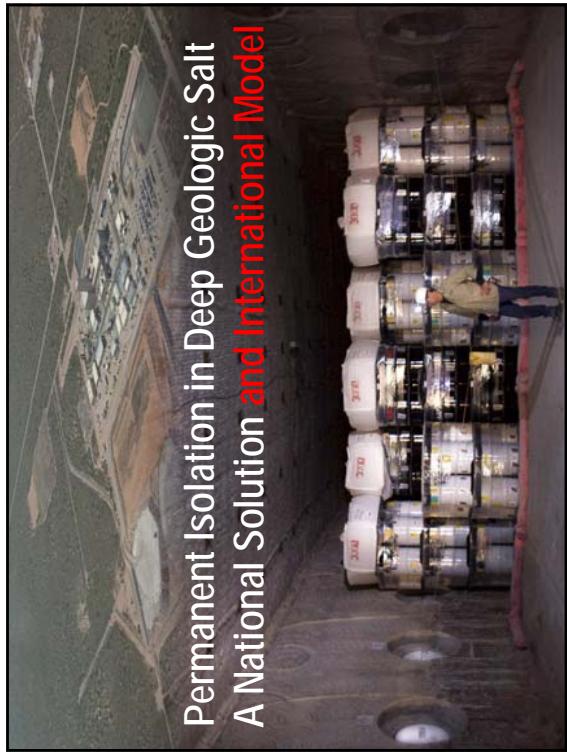

Permanent Isolation in Deep Geologic Salt A National Solution and International Model

Strong Headquarters Support for Recovery

"We are absolutely committed to this facility. We are, of course, committed to bringing it back to initial operations and then eventually to full operations, with safety fully in mind."

Secretary of Energy Ernest Moniz at a Town Hall meeting in Carlsbad, NM, August 12, 2014

Waste Isolation Pilot Plant

Road to Recovery

US/German Workshop on Salt Repository Research,
Design and Operation

Tammy Reynolds, NWP Deputy Recovery Manager
September 8, 2014

(1)

WIPP

Quick Facts:

- Opened: March 26, 1999
- 11,894 shipments received
- 90,983 cubic meters of waste disposed
- 171,064 containers disposed in the underground

(2)

WIPP Haul Truck Fire Event

(3)

AIB Salt Haul Truck Fire Findings

Feb. 7, DOE EM Deputy Assistant Secretary appointed an Accident Investigation Board (AIB) to conduct an evaluation of event and response.

Positive Observations


- Supervisors and employees in the underground proactively alerted other workers of the fire and need to evacuate before the evacuation alarm was sounded.
- Workers assisted each other during the evacuation, including helping them to don self-rescuers and SCSRs.
- Personnel in the underground exhibited detailed knowledge of the underground and ventilation splits.
- NWP on-site medical response was effective in treating personnel.

Report Findings

- Maintenance program was ineffective.
- Fire protection program was less than adequate.
- CMR response (evaluation and protective actions) was less than adequate.
- Emergency management/ preparedness and response programs were ineffective.
- Different treatment of waste versus non-waste handling equipment. (Nuclear facility versus mine culture)
- Inadequate oversight from government agencies

(4)

WIPP Underground and Ventilation System

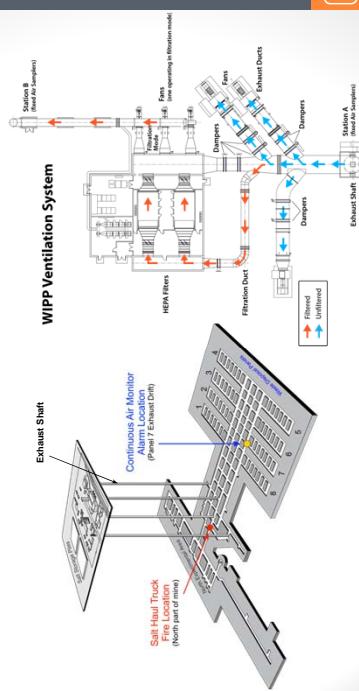

[5]


AIB Radiological Release Findings

Feb. 27, Accident Investigation Board appointed to evaluate radiological release and response.

- Phase 1 of the AIB investigation focused on the radiological release and the follow-on response to the release:
 - Ineffective components of the following WIPP programs were identified:
 - Nuclear safety program
 - Maintenance program
 - Radiation protection program
 - Emergency management program
 - Conduct of operations
 - Safety culture and oversight
- Phase 2 is focused on determining the direct cause of the release of material

[6]

Phase 2 AIB Investigation – Radiological Release

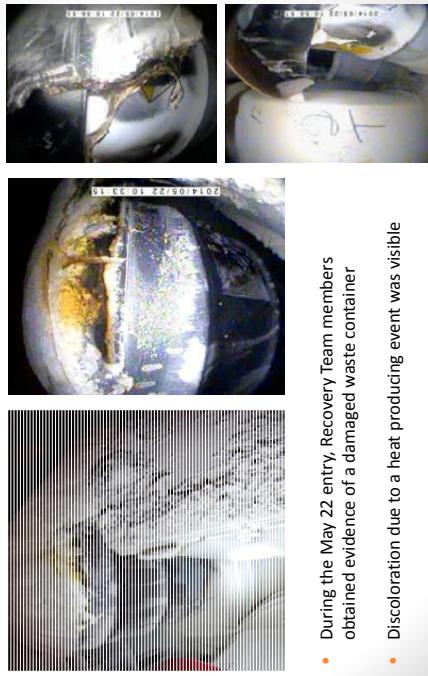

[8]


Initial Response: Plant is safe and stable



- Developed Nuclear Safety Documentation to support recovery activities
- Collection and analysis of environmental samples
- Completion of the event bioassay program
- Sealing of the bypass dampers
- Fans balanced and preventive maintenance completed to restore reliable operation
- Continuous Air Monitor installed at Station B
- Filters loaded with fire combustion products replaced and HEPA filters efficiency tested
- Cleaning of the Waste Hoist Tower and Waste Hoist components
- Safety Management Program compensatory measures implemented
- Significant nuclear operations experience added to NWP leadership team

[7]

Room 7, Panel 7

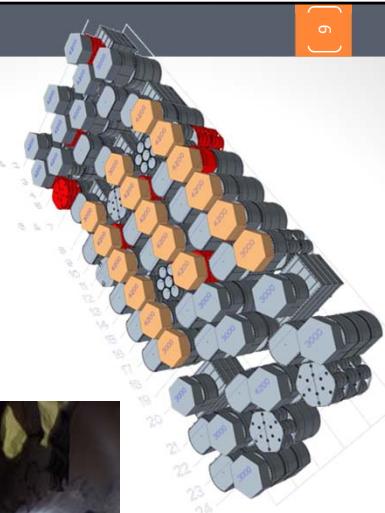

[9]

Support to the Accident Investigation Board

- Additional samples from Panel 7, Room 7 were taken on 8/15.

Project REACH

- Operator training
- Shipment to WIPP
- Install underground
- Operation
- Extendable composite 90-foot boom, suspended by moveable cradle atop a support structure



[10]


Resume Operations - Key Steps



[11]

- Nuclear Safety Document Revisions (continuing)
- Safety Management Program Revitalization (continuing)
- Underground restoration (initiated)
- Radiological Roll-back, Re-Establish Safety Systems, Cleanup, Habitability, Fire Protection, Maintenance and Ground Control
 - Expedited Panel 6 and Room 7, Panel 7 Closure
 - Interim Ventilation Modifications (procurement underway)
 - Expedite mine stability (resume bolting)
- Supplemental Ventilation Modifications (initiated)
- Readiness Activities
- Limited Operations
 - On-site waste
 - Off-site waste generators

WIPP Recovery Roadmap

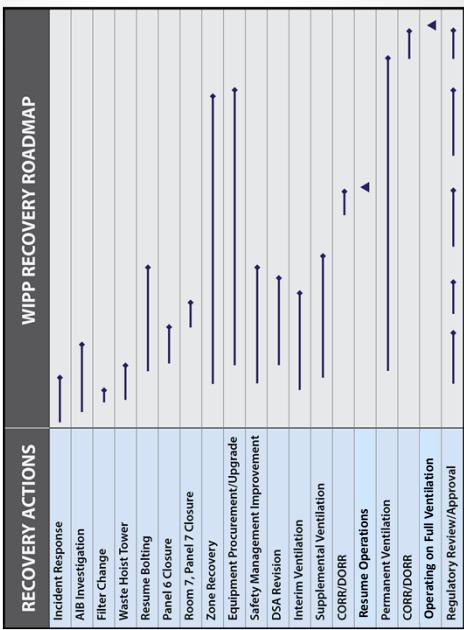


[12]

Operating on Full Ventilation - Key Steps

- Nuclear Safety Document revisions to support new ventilation system
- Continued ground control activities
- Replacement of outdated safety, mining and waste handling equipment
- New Ventilation System
 - Capital Project:
 - New shaft and drifts
 - requires extensive mining
 - New above ground ventilation system components (fans, filters)
- Readiness Activities




Recovering the Underground

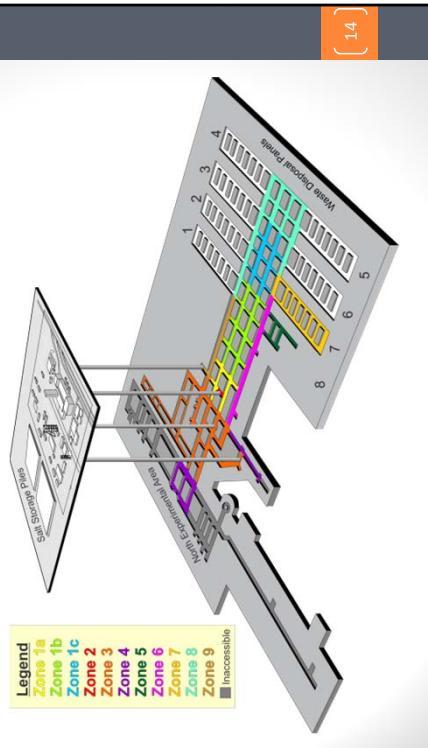


[14]

Radiological Area Rollback

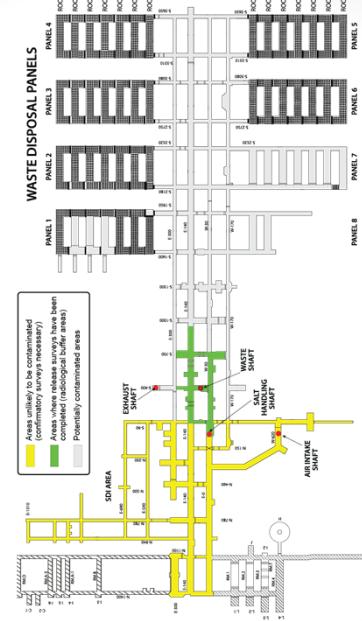

[15]

Geotechnical Measurements

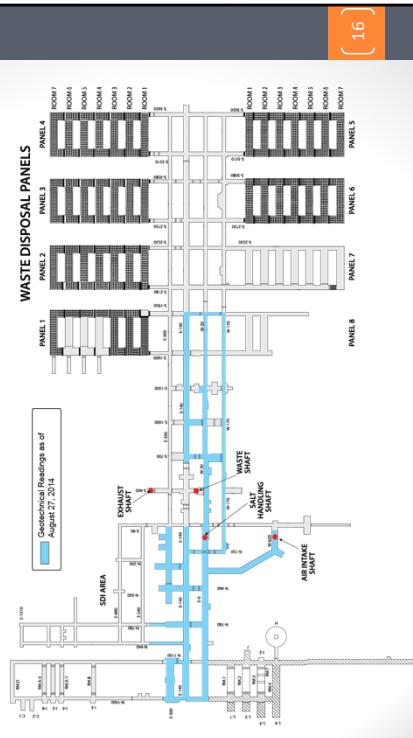


[16]

Nuclear Safety Culture – Driving WIPP's Future

- Immediate emphasis on stop work and verbatim procedure compliance
 - Good Catch recognition
 - Reinforcement by Pm in All-Hands meetings and Straight Talk
- Continuing emphasis on Work Control
 - Interactive Team Reviews
 - SMRB Review
 - Frequent rework to establish new expectations
- Revitalization of NSC as foundation
 - Seasoned advisors
 - Improvement Plan
 - Leadership Workshops
 - Management time in field
 - Reporting of mistakes/errors
 - WIPP NSC Worker Reference Guide

[17]

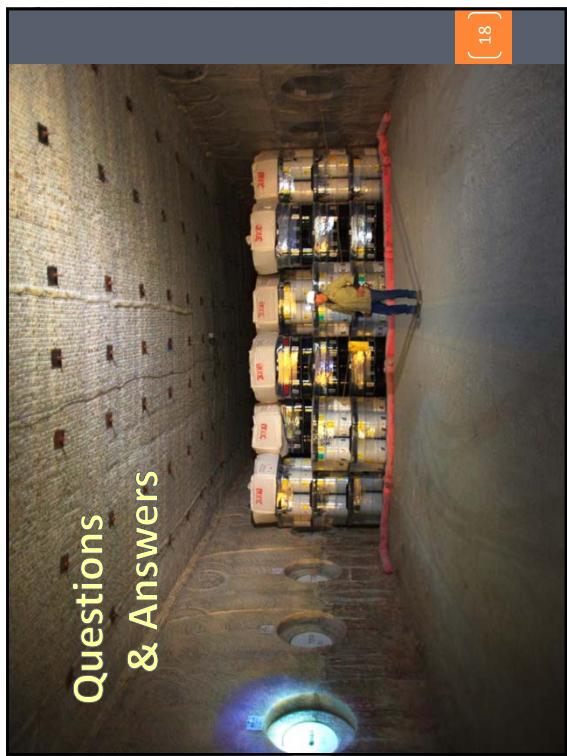

[18]

A Perspective on Removal, Retrieval and Reversibility as they relate to the Waste Isolation Pilot Plant

Steve Wagner

Abstract

With respect to waste removal, retrieval or reversibility (RR&R) within the WIPP project, the overall concept can be addressed by answering general questions about what is required, what the project said they would do, and what was actually done. The following answer these and other questions as they apply to RR&R and the Waste Isolation Pilot Plant (WIPP) radioactive waste disposal project.

What is Required: The radioactive waste disposal concept in the United States (U.S.) included “retrieval” from the start. The U.S. Government is legally responsible for radioactive waste disposal. The first geologic disposal concepts were based on recommendations in a 1957 National Academy of Science report on radioactive waste disposal. All attempts at siting disposal facilities used the “Pilot Project” concept. Eventually the U.S. government started investigating the bedded salt formation in the Delaware Basin of New Mexico. To gain acceptance at that time from the State of New Mexico and Local Municipalities, the disposal concept would first have a “test period” where all waste would be retrievable should the concept not meet disposal objectives. In 1976, the Environmental Protection Agency (EPA) was given the responsibility to develop generic radioactive waste disposal regulations that eventually included waste retrieval and removal requirements. At that time the ability to retrieve or remove waste became necessary past the “test period”. The EPA’s rationale for waste removal was not to make recovery of the waste easy or cheap but to make it possible in case some future discovery or insight made it clear that the waste needed to be relocated. Additional requirements imposed on the WIPP by the U.S. Congress and the State of New Mexico required a retrieval demonstration prior to actual waste emplacement.

Additionally the WIPP project defines “disposal” as permanent isolation of radioactive waste from the accessible environment with no intent of recovery. Disposal occurs in a mined geologic repository when all of the shafts to the repository are backfilled and sealed. Where the WIPP project includes the concepts of waste removal and retrieval, the project does not intend to ever do so.

What they said they would do: As stated earlier, the WIPP is a pilot project that included the concept requiring the ability for waste retrieval before closure. The disposal regulations also required that it be feasible to remove waste after operations ceased and the repository was sealed. A waste removal after closure feasibility analysis was included in the Compliance Certification Application to the EPA and a remote retrieval demonstration was performed under conditions simulating a roof fall in the underground on simulated waste containers.

International Perspective: Most international disposal concepts are similar to what was developed in the U.S. in that most include the requirement for waste retrieval during the repositories operational period. Recent attention has been given to the concept of reversibility.

The intent is to include reversibility in the disposal system design. Whereas the U.S. concept only requires it to be feasible to remove waste after closure, reversibility requires a repository design that allows for waste retrieval during any phase of a disposal program.

What has been done – Actual retrieval: DOE has retrieved a few of the emplaced containers from the underground. The State of New Mexico required DOE to retrieve a waste container in August, 2007 when it was learned that the wrong container had been shipped to WIPP. The DOE decided to retrieve another waste container in June, 2008. These drums were returned to the generator sites for remediation because they did not fully meet the waste acceptance criteria, not for health and safety reasons.

Lessons Learned - Risk vs benefits: One element that has been overlooked by the WIPP regulators and stakeholders is risk. The regulations associated with waste retrieval/removal do not address risk or benefit and are silent as to the conditions that warrant retrieval/removal. The project therefore has no recourse when regulators require retrieval of waste containers that may be deficient but can be shown to not have any impact on overall repository performance. Lessons learned regarding removal/retrieval requirements recommend that other disposal program's regulations outline specific risk vs. benefit elements in decisions that lead to waste retrieval. The actual risk of retrieval, in many cases, have associated risks relating to occupational health, dose and transportation/accident risks that are real and may be greater than the risks associated with the newly discovered condition of the waste or repository.

Sandia National Laboratories is a multi-program laboratory operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. This research is funded by WIPP programs administered by the Office of Environmental Management (EM) of the U.S Department of Energy.

SAND2014-16394A

Outline

- With respect to waste removal, retrieval or reversibility within the WIPP project, the overall concept can be addressed by answering general questions:
 - What is required
 - What did the project said they would do
 - What has the project actually done
 - This presentation will answer these and other questions as they apply to the Waste Isolation Pilot Plant (WIPP) radioactive waste disposal project.

2

RR&R – What is Required?

- US Government's first radioactive waste geologic disposal concept was a "Pilot Project" based on National Academy of Science recommendations (1957)
 - Originally Self-Regulated – Atomic Energy Commission
 - To gain acceptance from State and Local Municipalities, the disposal concept would first have a "test period" where all waste would be retrievable should the concept not meet disposal objectives

1

Saint
National
Labs

Exceptional service in the national interest

A Perspective on Removal, Retrieval and Reversibility as they relate to the Waste Isolation Pilot Plant

Steve Wagner – John Hart and Associates

Steve Wagner = John Hart and Associates



Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94ER40000, SAND NO. 2014-0671/CE.

Waste Isolation Pilot Plant Facts

- WIPP is geologic disposal facility designed to dispose ~176,000 m³ of transuranic waste from defense-related activities
 - Waste area is mined in a bedded salt formation, ~2,150 ft (655 m) Below the Ground Surface
 - Plutonium & Americium are major radionuclides in the waste
 - US Congress established the Environmental Protection Agency (EPA) as the radioactive waste disposal regulating authority; the Department of Energy is the site developer
 - Early disposal concepts of "Pilot Project" included Retrievability Requirement (1970's)

6

RR&R – What is Required?

RR&R – What is Required?

- In 1976 the EPA was given the responsibility to develop general radioactive waste disposal regulations
- Retrieval requirements were included in the final regulation
- Retrieval concept became necessary past “test period”
- Additionally, the U.S. Congress and the State of New Mexico required test-phase Retrieval demonstrations (LWA, Consultation and Cooperation Agreement)

5

RR&R – What is Required?

- **EPA Regulations for WIPP**
 - **EPA 40 CFR 191**
 - Generic Radioactive Waste Disposal Standards
- **EPA 40 CFR 194**
 - Site-Specific Certification Criteria

6

- Assurance Requirement
 - 191.14(f): Disposal systems shall be selected so that removal of most of the waste is not precluded for a reasonable period of time after disposal

- Removal of waste must be feasible using existing technology

- Waste must be retrieved to the extent practicable if EPA revokes certification

RR&R – What is Required

- EPA RR&R Perspective
- EPA Certification Criteria (40 CFR 194.46)
 - “Any compliance application shall include documentation which demonstrates that removal of waste from the disposal system is feasible for a reasonable period of time after disposal. Such documentation shall include an analysis of the technological feasibility of mining the sealed disposal system, given technology levels at the time a compliance application is prepared”

7

What We Said We Would Do

- For US Congress and State of New Mexico Requirements
 - DOE documented a mock test waste retrieval demonstration on April 27, 1992 using remote controlled devices (video available)
- For EPA Disposal Requirements
 - DOE document the results of a feasibility of waste removal after closure in Appendix WRAC of the EPA compliance application
 - DOE acknowledges that EPA requires waste retrieval if the certification were to be revoked.
 - “If the Administrator revokes the certification, the Department shall retrieve, as soon as practicable and to the extent practicable, any waste emplaced in the disposal system.” 40 CFR 194.4(b)(1)

8

What We Actually Have Done

- DOE has retrieved emplaced containers from the underground
 - The State of New Mexico required DOE to retrieve a waste container in August, 2007
 - DOE decided to retrieve a waste container in June, 2008
- Drums were returned to the generator sites for remediation because they did not fully meet the waste acceptance criteria, they were not returned for health/safety reasons

9

International Perspective

- Most international disposal concepts are similar to what was developed in the U.S.
 - most programs include the requirement for waste retrieval during the repositories operational period.
- Recent attention has been given to the concept of reversibility.
 - The intent is to include reversibility in the disposal system design.
 - Whereas the U.S. concept only requires it to be feasible to remove waste after closure, reversibility requires a repository design that allows for waste removal during any phase of a disposal program.

10

Lessons Learned

- RISK
 - The WIPP regulations associated with waste retrieval/removal do not address risk or benefit and are silent as to the conditions that warrant retrieval/removal.
 - The project has no recourse when regulators require retrieval of waste containers that may be deficient but can be shown to not have any impact on overall repository performance, the environment or public safety.
- Recommendation
 - Recommend that disposal program's regulations outline specific risk vs. benefit elements in decisions that lead to waste retrieval.
 - The actual risk of retrieval, in many cases, have associated risks relating to occupational health, dose and transportation/accident risks that are real and may be greater than the risks associated with the newly discovered condition of the waste or repository.

11



September 2014



— Outline —

- Why Retrievability?
- Definitions and legislation on retrievability
 - Definitions
 - Legislation
- Implications of retrievability requirements on repository designs
 - Drift disposal concept
 - Borehole disposal concept
- Summary and conclusions

Retrievability as Design Requirement for a Repository for HLW and SF

Wilhelm Bollingerfehr

DBE TECHNOLOGY GmbH

Eschenstraße 55, D31224 Peine/Germany

— Why Retrievability? —

EC-Concerted Action on Retrievability (2000)

The most frequently used arguments listed are:

1. Safety and operational arguments

- Disposal should be reversible in case something goes wrong with the emplacement of a package
- Retrieval of a waste package may be necessary in case a waste package malfunctions during or after emplacement
- Retrieval of waste packages may be necessary if the repository appears to be malfunctioning at a later stage

2. Licensing arguments

- Retrievability should be included in order to facilitate a staged decision and licensing process

— Why Retrievability? —

3. Societal arguments

- Radioactive waste may contain potentially useful materials, which may become valuable in the future. It could be the wish of a future society to utilise such a resource.
- Disposal decisions should not be irrevocable, in order to provide future generations with the option to make their own decisions.
- From a sustainable society viewpoint, high priority is given to the reuse of materials and to a minimisation of the quantity of waste that needs to be disposed of. Views and/or technology for reuse of materials may be different in the future
- The precautionary approach and the recognition of uncertainty speak in favour of retrievability

Why Retrievability?

Definitions

4. Waste management arguments

- Future new technology or scientific knowledge could – based on re-evaluation of the cost/benefit balance – motivate modifications in earlier disposal, or retrieval of disposed waste packages.
- A repository that includes design features to keep the waste packages retrievable could offer better possibilities for control and surveillance of the waste after disposal.

Reversibility


- „Reversibility describes **the ability in principle** to change or reverse decisions taken during the progressive implementation of a disposal system“ /NEA 2011/.
- Retrievability**
- „Retrievability, in waste disposal, is **the ability in principle** to recover waste or entire waste packages once they have been emplaced in a repository“ /NEA 2011/.

5. Public acceptance arguments

- A disposal concept may be better appreciated, when key decisions are reversible. Including retrievability may enhance the acceptance of geological disposal.

- “Retrievability is the **planned technical option** for removing emplaced radioactive waste containers from the repository mine“/BMU 2010/.
- ✓ operational phase of repository until closure of shafts and/or ramps
- Recovery**
- “Recovering is the retrieval of radioactive waste from a final repository as an **emergency measure**“/BMU 2010/.
- ✓ up to 500 years after repository closure

Retrievability-Scale (NEA 2011)

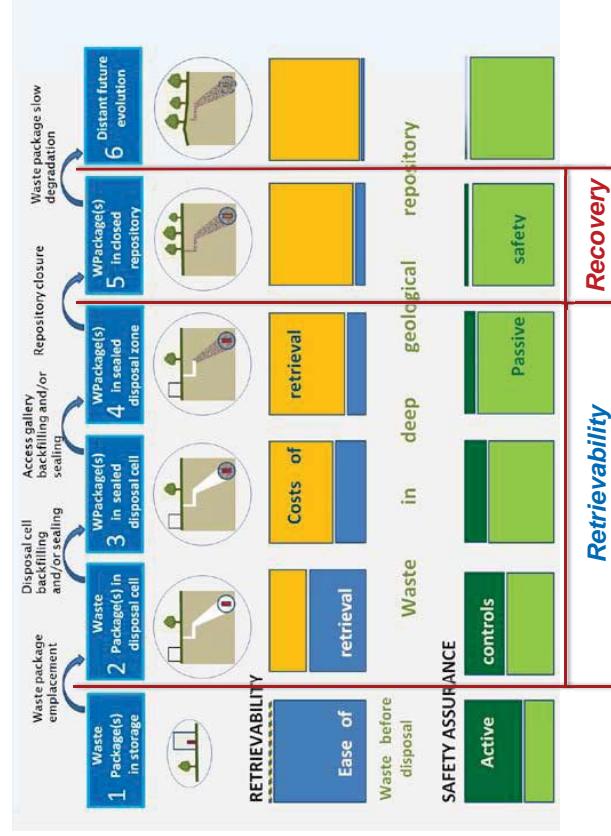

German Legislation

Retrieval requirements:

“8.6 :

Waste containers **must fulfill the following safety functions**, with due regard for the waste products packaged therein and the backfill surrounding them:


- For probable developments, **handleability** of the waste containers must be **guaranteed for a period of 500 years** in case of recovery from the decommissioned and sealed final repository. Care should be taken to avoid the release of radioactive aerosols.
- During the **operating phase** up until sealing of the shafts or ramps, **retrieval** of the waste containers **must be possible**.

Measures taken to secure the options of recovering or retrieval must not impair the passive safety barriers and thus the long-term safety.

(according to: “Safety Requirements Governing the Final Disposal of Heat-Generating Radioactive Waste” as at 30 September 2010)

Implication on Repository Design

Borehole Disposal Concept

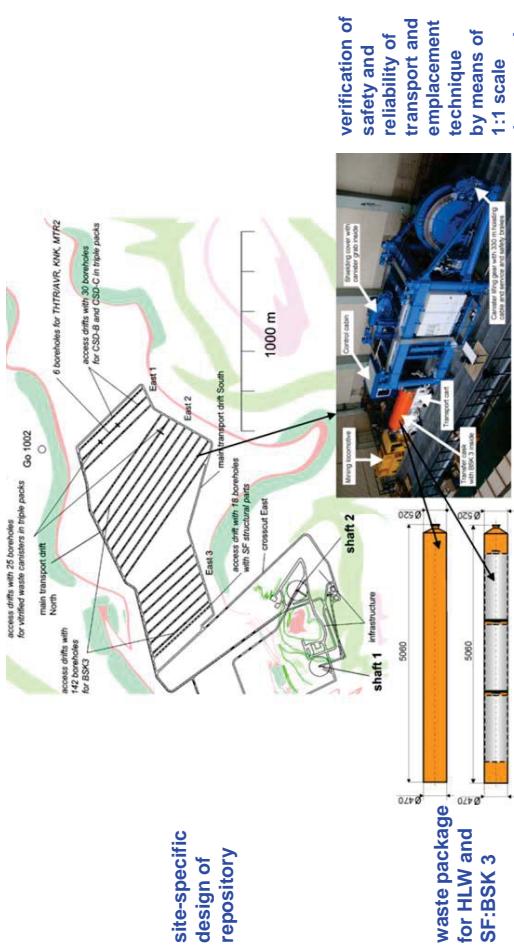


Böllingerfeld 09/2014

13

Implication on Repository Design

Detailed planning of ventilation/cooling needed!

Example:
Borehole
Disposal
Concept

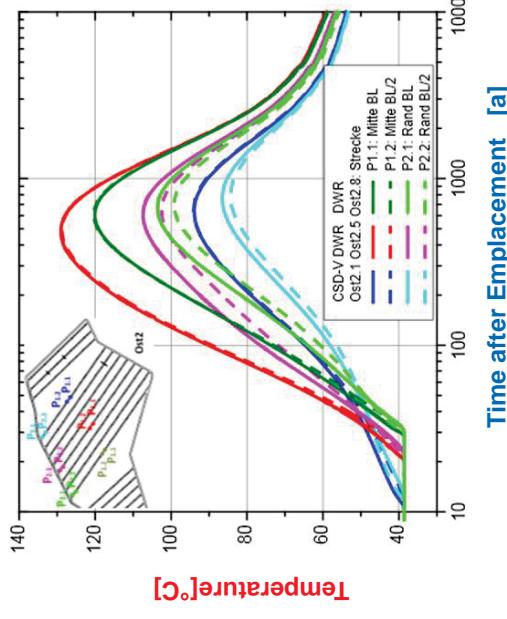


Böllingerfeld 09/2014

14

Implication on Repository Design

Borehole Disposal Concept

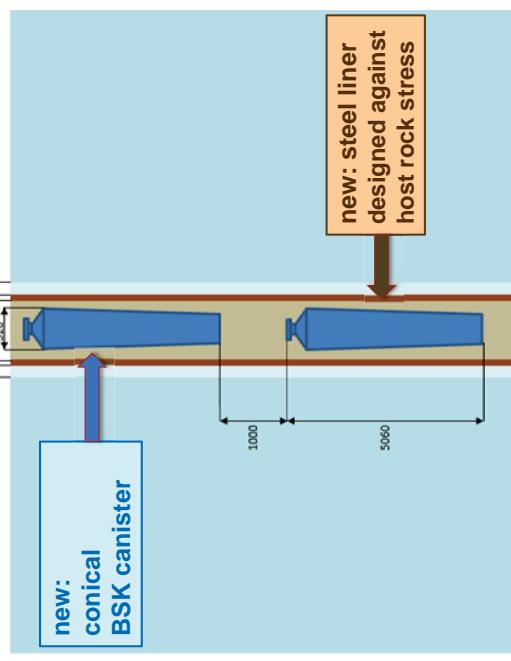

Böllingerfeld 09/2014

14

Summary and conclusions

For drift disposal concept

- ✓ Retrieval of emplaced POLLUX® casks is technically feasible during repository operational period (several decades)

For borehole disposal concept:

- ✓ Retrieval of emplaced BSK containers is technical feasible assuming:
 - the borehole is lined
 - the new BSK container meets design expectations

For both concepts:

- ✓ Detailed ventilation and cooling systems have to be designed
- ✓ Interim storage facilities and casks are required (prior to repository licensing)
- ✓ A conditioning plant may be required (depending on disposal concept)

Acknowledgements

Many thanks

- to my colleagues:

✓ Wolfgang Filbert
✓ Phillip Herold
✓ Sabine Dörr

for their contributions to the DBETEC report on retrievability

- to the Federal Ministry for Economic Affairs and Energy (BMWi) and the Project Management Agency Karlsruhe (PTKA) of the Karlsruhe Institut of Technology (KIT) for funding the R&D project on retrievability



Thank You
for Your Attention!



Salt Disposal Research, Development, and Demonstration

5th US/German Workshop on
Salt Repository Research, Design and Operations
Santa Fe, New Mexico, USA
September 7-11, 2014

Robert J. MacKinnon--Sandia National Laboratories, Albuquerque New Mexico USA

Abstract

The United States Department of Energy (US DOE) is conducting research and development (R&D) activities within the Used Fuel Disposition (UFD) Campaign to support disposal of used nuclear fuel (UNF) and wastes generated by existing and future nuclear fuel cycles. Disposal R&D focuses on identifying geologic disposal options and addressing technical challenges for generic disposal concepts in mined repositories in salt, clay/shale, and granitic rocks, and deep borehole disposal. This talk will first give an overview of the DOE UFD Campaign and its mission and then describe the R&D investigations that are being implemented to support a generic safety case for a geologic repository in salt host rock. These R&D investigations range from laboratory-scale investigations and modeling studies to the design of larger-scale field testing that would be beneficial for specific safety case objectives.

Sandia National Laboratories is a multi-program laboratory operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DEAC04-94AL85000. SAND2014-16796A.

Exceptional service in the national interest

Sandia National Laboratories


Salt Disposal Research, Development, and Demonstration (RD&D)

September 2014

5th INTERNATIONAL US/German Workshop Salt Repository Research, Design, & Operation Santa Fe, New Mexico, USA September 7-11, 2014

Corporate sponsors of the workshop include Sandia National Laboratories and Los Alamos National Laboratory, and the U.S. Department of Energy's Nuclear Science and Technology Division.

Participating organizations include FTRK, DBETEC, NASA, and DOE.

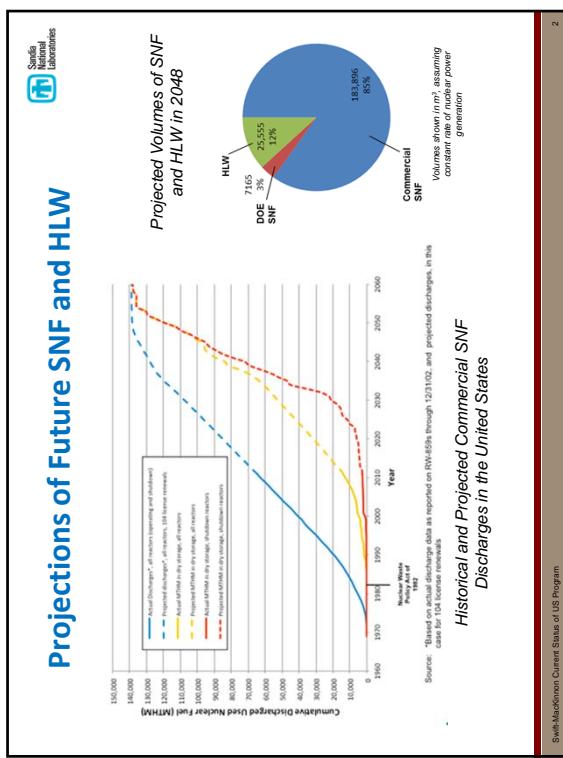

Summary of the Administration's Strategy for Used Nuclear Fuel and High-Level Radioactive Waste

Sandia National Laboratories

Strategy for the Management and Disposal of Used Nuclear Fuel and High-Level Radioactive Waste issued January 2013.

The Strategy outlines a 10-year program:

- Site, design, license, construct and begin operation of a pilot interim storage facility (operating 2021)
- Advance toward siting and licensing of a larger interim storage facility (operating 2025)
- Make demonstrable progress on siting and characterization for geologic disposal (sited 2026, operating 2048)

Swink/Mackinnon Current Status of US Programs


Disposal R&D within the DOE

Sandia National Laboratories

- The Nuclear Waste Policy Act and Congressional Appropriations preclude site-specific repository investigations**
- All disposal research must be generic at this stage**
- What can generic R&D accomplish?**
 - Provide a sound technical basis for the assertion that the US has multiple viable disposal options that will be available when national policy is ready
 - Identify and research the generic sources of uncertainty that will challenge the viability of disposal concepts
 - Increase confidence in the robustness of generic disposal concepts to reduce the impact of unavoidable site-specific complexity
 - Develop the science and engineering tools required to address the goals above, through collaborations within NE and DOE, and with universities, industry, and international programs


Swink/Mackinnon Current Status of US Programs

DOE Office of Nuclear Energy Organization Chart

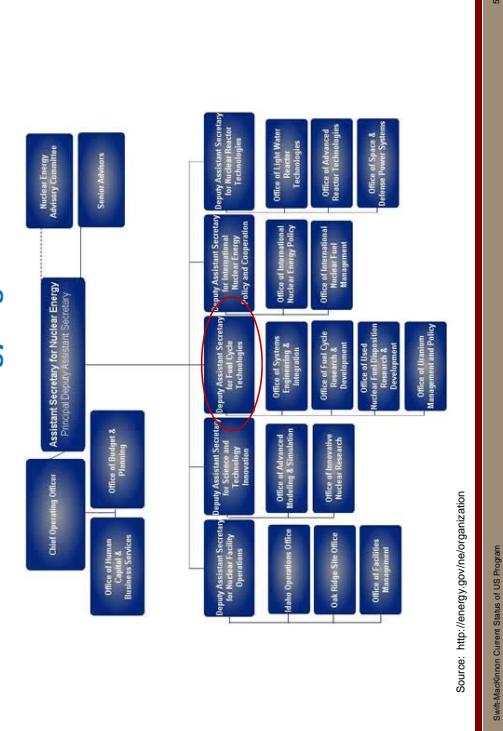

Source: <http://energy.gov/organization>

**DOE Office of Nuclear Energy
Office of Fuel Cycle Technologies (NE-5)**

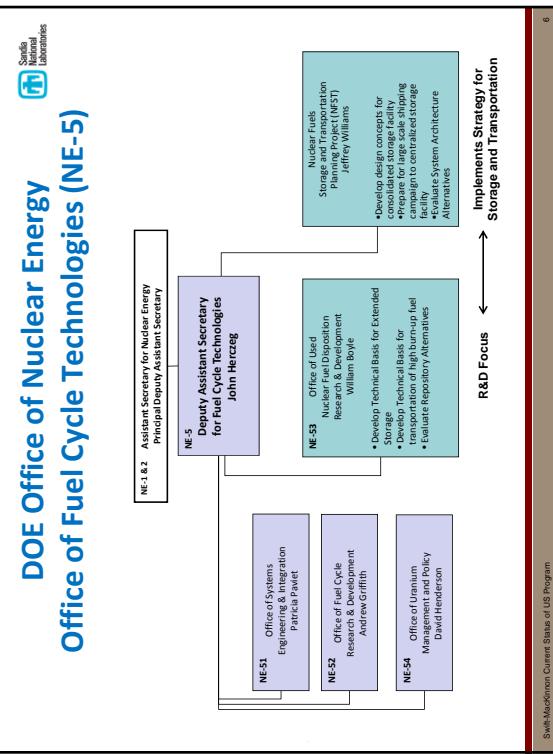

Swift-MacKinnon Current Status of US Program

DOE's R&D Program for Used Nuclear Fuel Disposition


Nine national laboratories participate in the DOE Office of Nuclear Energy's "Used Fuel Disposition Campaign" (UFDC)

Campaign Mission: to identify alternatives and conduct scientific research and technology development to enable storage, transportation and disposal of used nuclear fuel and wastes generated by existing and future nuclear fuel cycles.



卷之三

Campaign Structure

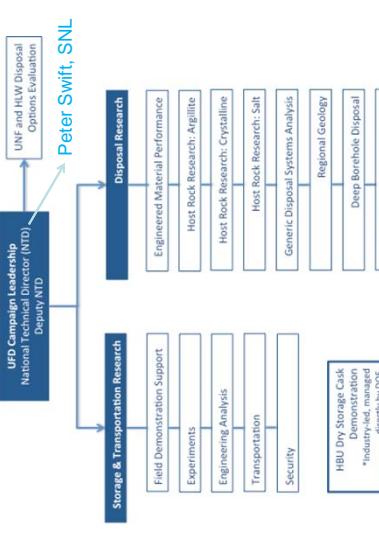

1

Sandia National Laboratories

UFD R&D Campaign 2009-Present


- FY09 Planning meeting at Argonne National Laboratory, June 2009
- FY10 R&D funding at \$7.1 M
 - Disposal R&D, modest level of effort on Storage R&D, no Transportation R&D
- FY11 R&D funding at \$23.8 M
 - Nine national laboratories participating in UFD
 - Significant R&D program in Storage, including Transportation
 - Disposal R&D not site specific
- FY12 R&D budget baseline at \$22.8 M, end-of-year actual ~\$27 M (Salt R&D - \$4.5 Mill)
 - Some elements of FY12 work scope not established until fourth quarter
- FY13 R&D \$23.5 M (Salt R&D \$2.06 Mill)
 - Nuclear Fuel Storage and Transportation Planning Project initiated
 - Storage demonstration R&D initiated external to UFD R&D Campaign
- FY14 R&D end-of-year baseline at \$22.5 M (Salt R&D - \$2.25 Mill)
 - Significant redirection of scope within campaign in initial planning
 - Storage and transportation at a 5% of budget
 - Disposal research at 37% of budget
 - Management and integration at 8%
 - Work through February 2014 limited to annual total of \$15.4 M
- FY15 Salt R&D projected to be \$1.25 Mill (\$750K lab, \$500K field)

Summary of UFD R&D Campaign

9

Schematic of Features of a Backfilled Repository Room

 Sandia National Laboratories

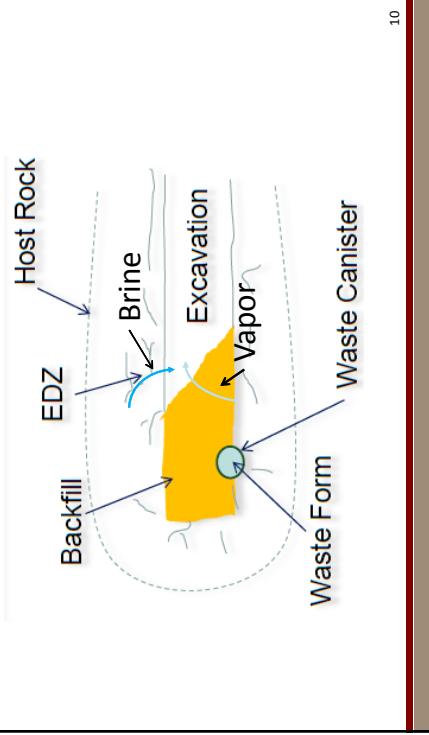

10

Salt RD&D Deliverables

 Sandia National Laboratories

- Summary Results for Brine Migration Modelling Performed by LANL, LBNL and SNL
- For the Used Fuel Disposition Program (9/25/2014) - SNL, LBNL, LANL
- Salt R&D migration experimental studies in salt 2014 (08/24/2014) - LANL
- Report on Modeling Coupled THMC Processes and Brine Migration in Salt at High Temperatures (9/13/2014) - LBNL
- Analysis of Data from Salt Reconsolidation Experiments at Sandia National Laboratories in FY12 and FY13 (3/13/2014) - SNL
- Thermal Conductivity of Salt as a Function of Porosity (3/12/2014) - SNL
- Modified Test Plan For Salt Reconsolidation Experiments at Sandia National Laboratories (6/26/2014) - SNL
- Thermomechanical Testing of Intact Salt Results for FY14 (6/16/2014) - SNL
- Thermodynamics of Brines, Minerals and Corrosion Products at High Temperatures: FY14 Results (9/30/2014) - SNL
- Results from the US-German Benchmark Initiative for FY14 (9/30/2014) - SNL
- Results from The 4th US German Workshop on Salt (12/23/2013) - SNL

12

Salt RD&D

 Sandia National Laboratories

Many of these activities are documented in technical reports and will be discussed in this 5th US/German Workshop

EXISTING SALT DATA COMPILED AND ASSESSMENT

THERMAL, MECHANICAL, HYDROLOGIC, AND CHEMICAL LABORATORY STUDIES RELATED TO SALT

- Hot Granular Salt Consolidation, Constitutive Model and Micromechanics
- Thermal Conductivity as a Function of Porosity and Temperature
- Laboratory Thermochemical Testing
- Brine Migration Experimental Studies
- Material Interactions In Heated Salt
- Thermodynamic Properties of Brines, Minerals and Corrosion Products in High Temperature Systems
- Radionuclide Solubility Measurements

INTERNATIONAL COLLABORATION

11

 Sandia
National
Laboratories

Salt RD&D: Field Studies

General Objectives

- Develop technology and methodology for rock characterization and testing
- Better understand, model and test relevant processes
- Better understand various components of engineering barrier system
- Provide quantitative data for safety assessment calculations
- Test and optimize full-size repository components and operating procedures (demonstration)
- Optimize repository construction techniques
- Training and benchmarking
- Promote international co-operation
- Build confidence in scientific and technical community
- Contribute to public trust and confidence

After IAEA-TECDOC-1243, 2001

13

 Sandia
National
Laboratories

Salt RD&D: Field Studies

Upcoming Deliverables

- Framework for Underground Research—important protocol for URL activity evaluation
- Draft report--Test Plan for Mechanical and Hydrological Behavior of the Near-field Host Rock Surrounding Excavations
- Draft report--Test Plan for Phased Large-Scale Thermal Testing

14

 Sandia
National
Laboratories

Questions?

15

Practical Analogues for Postulated Releases from Geologic Repositories - Natural Background Radiation

N. Rempe

Abstract

Background radiation emanating from geologic and other natural sources is an obvious, yet routinely overlooked and neglected, analogue for theoretical, postulated, and calculated radiological releases from geologic repositories. Natural releases have varied through Earth's history and vary in terrestrial space by two orders of magnitude or more, with negligible to no deleterious effects (and significant indications of beneficial effects at low dose rates) on living organisms. Physical and geological evidence, rather than gratuitously imposed and enforced regulatory standards, should determine the outer bounds that scientists and engineers support and defend for hypothetical and real radiological releases from engineered geologic repositories.

Practical Analogues for Postulated Releases from Geologic Repositories – Natural Background Radiation

Norbert T. Rempe
Carlsbad, NM, USA

rempent@yahoo.com

ng(o)



ng(o)

While generations of students and scientists have learned about radioactive decay and the half-lives of various radioactive elements and isotopes, virtually **no one has turned the telescope around** and discussed or documented the reverse view: The same number of half-life years taken back into the past produces a double-life, a doubling of radioactivity for these elements, and an incremental terrestrial background level many times higher than today's levels.

Gerald L. Looney (2003) Radiation hormesis and the radiological imperative
<http://www.ncbi.nlm.nih.gov/pmc/articles/PMC1275746/>

ng(o)

Annual Background Radiation Exposure vs. Annual Public Exposure Limits:

U Mines and Mills

- Background Levels (from previous slide)
 - > Colorado average = 400 mrem
 - > Leadville, Colorado = 526 mrem
 - > U.S. average = 310 mrem
- Regulatory Limits
 - > EPA drinking water standard = 4 mrem¹
 - > EPA limit for all exposure pathways = 25 mrem²
 - > NRC Limit with radon = 100 mrem; excluding radon = 25 mrem³

1 U.S. Environmental Protection Agency. Radionuclides in spring water. Available at: <http://www.epa.gov/radon/radonradon.html>
2 U.S. Environmental Protection Agency. Environmental radiation protection for nuclear power operations, 40 CFR 190.10, 2006.
3 U.S. Nuclear Regulatory Commission. Domestic Licenses of Source Material , 10 CFR 40
Source Material License, 10 CFR 40.2003 Corrections

SHB, Inc.

<http://www.nima.org/pdf/unibrown.pdf>

ng(o)

Decrease in the natural radioactivity of Earth's crust from the decay of its most common radioactive isotopes

(Significant conclusion: All natural uranium is depleted uranium)

Million years ago	Relative decrease in radioactivity		
	U-238	U-235	Th-232
5,000	2.14	1.28	1.29
2,000	1.35	0.75	1.08
present	~1	~1	~1

Source: L.A. Patrov, "The natural radioactivity of the biosphere," Israel Program for Scientific Translations, Jerusalem, 1967.

ng(o)

Example Conclusions from Studies on Health Impacts on Populations Living Near Uranium Mines and Mills

- "The absence of elevated mortality rates of cancer in Montrose County over a period of 51 years suggests that the historical milling and mining operations did not adversely affect the health of Montrose County residents."¹¹
- "No unusual patterns of cancer mortality could be seen in Kanes County over a period of 50 years suggesting that the uranium mining and milling operation had not increased cancer rates among residents."¹²

¹¹Cancer and Mortality Abstracts for Populations Living Near Uranium and Thorium Mining and Milling Operations, 1950 - 2000, France, JF, Marmura, MF et al. Journal of Radiation Research, 16(1):71-76, 2005.
¹²Assault to a Person County with Prior Uranium Mining and Milling Activities, 1950 - 2001, Brown, RJ, Marmur, M et al. Journal of Radiological Protection, 23:247 - 252, 2003.

SHB, Inc.

<http://www.nma.org/pdf/unw/brown.pdf>

ng(o)

Radiation Background in Kerala India

- Unusually high natural radiation background has been known for many years due to natural thorium in the monazite sands of the region
- Annual outdoor exposure levels as high as 7000 mrem have been measured where people live
- Recent epidemiological studies have concluded no excess cancers in over 69,000 residents studied for 10 years!¹³

¹³Huang, B. Ruan, et al. Background radiation and cancer incidence in Kerala, India—A geologically exotic study area. Health Physics, 96 (1), January, 2009.

SHB, Inc.

<http://www.nma.org/pdf/unw/brown.pdf>

ng(o)

"no consistent detrimental effect has been detected so far"





The map illustrates the distribution of high background radiation areas across several countries. In Iran, there are large, light-colored regions indicating high natural radioactivity, particularly around the Caspian Sea and central Iran. The map also shows parts of Turkmenistan to the north and Saudi Arabia to the south. A specific location, Ramsar, is highlighted with a red dot. The map includes labels for major rivers like the Aras and Karkheh, and cities like Tehran and Isfahan.




Source: The Very High Background Radiation Areas of Iran, Iranian Geology and Mineral Resources Organization, Environment and Energy Policy Analysis Center, Nuclear Energy Research Institute, Office of Nuclear Energy, Science and Technology, University of Rochester, Presented to NCRP, Radiation Safety Without Doubts November 12, 2002

SHB, Inc.

<http://www.nma.org/pdf/unw/brown.pdf>

ng(o)

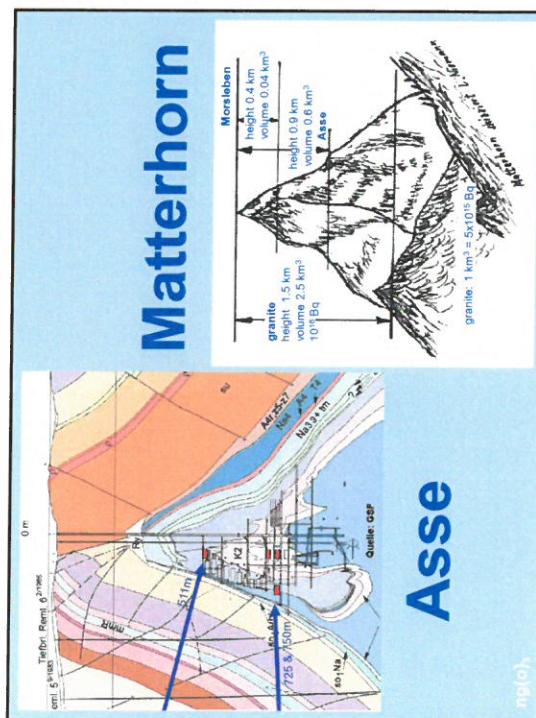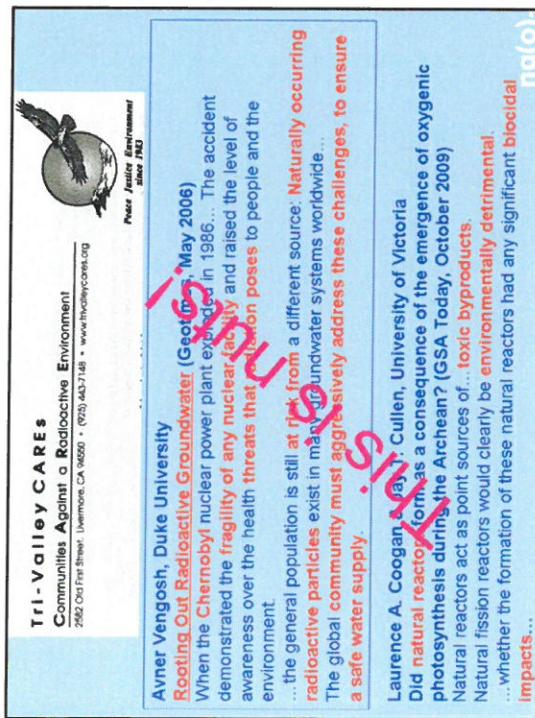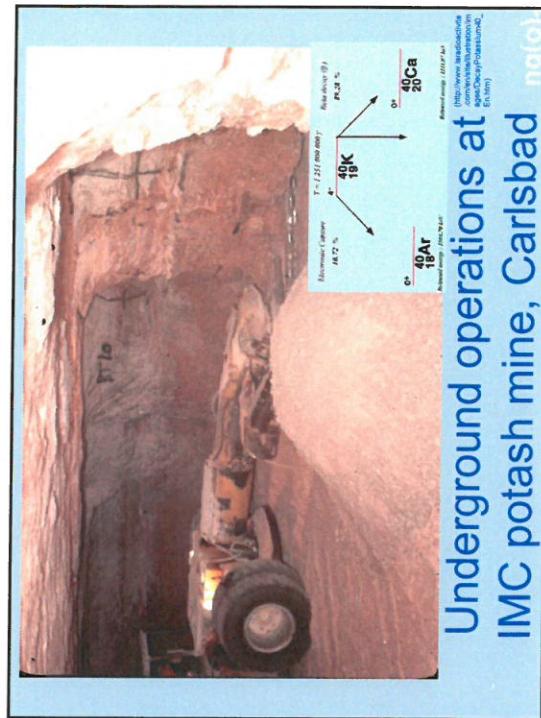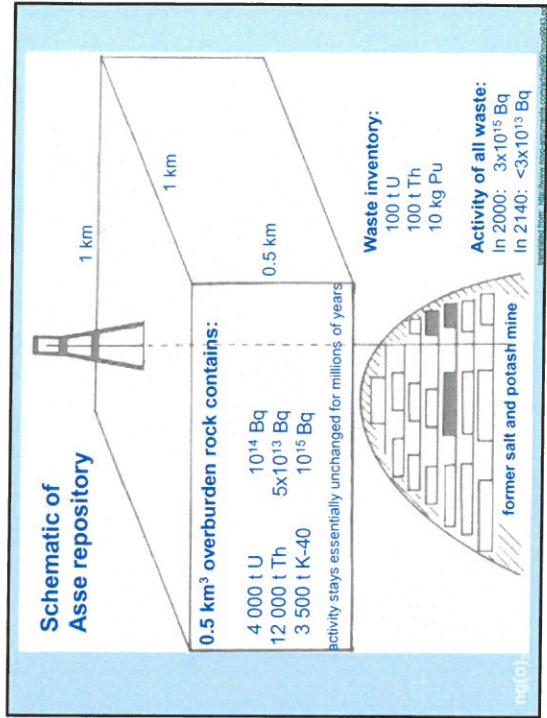

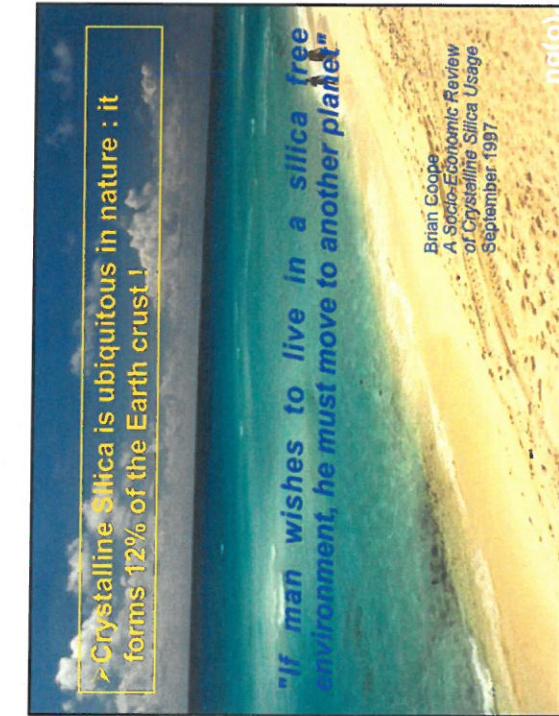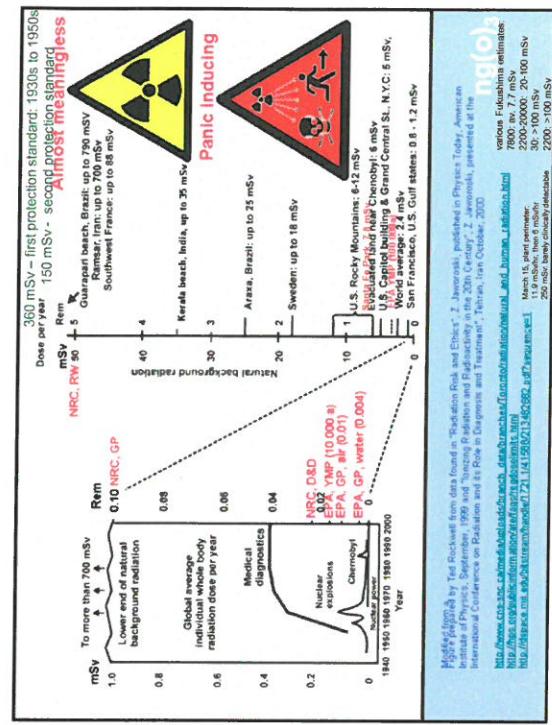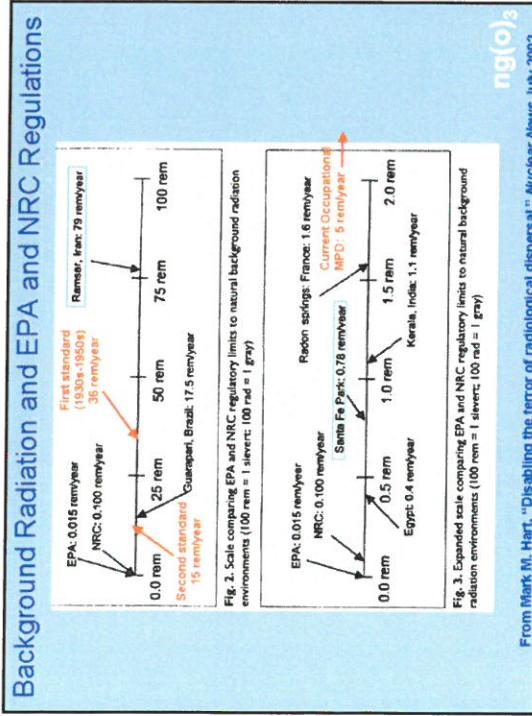

Everything is:
porous
permeable
wet
and radioactive

(personal lesson learned in 23 years at WIPP)

ng(o)
ng(o)

Dutch Salt Safety Case and Research Program

Jaap Hart, Jan Prij
NRG Radiation & Environment
Petten, Netherlands

Acknowledged:
Dirk-Alexander Becker, Jens Wolf, Ullrich Noseck (GRS)
Geert-Jan Vis (TNO)

September 2014

NRG


Contents

- Dutch National programs
 - ICK (< 1979)
 - OPLA-1 (1984 – 1989)
 - OPLA-1A (1989-1993)
 - CORA(1995 – 2001)
- Program Revitalisation
 - OPERA
 - Safety Case
 - The "Salt Safety Case"
- Concluding remarks
- Research performed at Utrecht University

2

ICK Interdepartementale Commissie Kernenergie *Interdepartmental Commission Nuclear Energy*

- Before 1979
- Types and amounts of radioactive waste
- Waste management methods
- **Design considerations for deep disposal**
 - Temperature calculations - TASTE
 - Criteria for site selection



TASTE: Three-dimensional Analysis of Salt
Dome Temperatures

NRG

OPLA-1 Commissie Opberging te Land *Commission Disposal on Land*

Central theme: radiation safety

- 1984-1989
- Geology / geohydrology
- Host rock mechanics
- Radiation damage in rock salt
- Mining engineering
- In situ experiments in Asse salt mine
- 26 Reports - Final Report (1989) available at www.covra.nl

4

NRG

OPLA-1A

Follow-up of OPLA-1

- 1989-1993
- Systematic scenario development
- Development and application of **probabilistic** methods for consequence analysis (**PROSA**)
- In situ research in Asse (demonstration techniques, heater experiments)
- Radiation damage in rock salt
- Final PROSA Report: 1993
Jan Prij, et al., PRObabilistic Safety Assessment, Final Report, 1993



5


CORA Commission Opbergung Radioactief Afval Commission on Radioactive Waste Disposal

- 1996-2001
- Retrievable disposal in salt and clay
- Geology/geohydrology; additional research
- Mining engineering: costs and backfill
- Radiation damage in rock salt
- Societal effects and ethics
- 21 Reports
(available at www.covra.nl)



OPERA Programme Organization

- ❖ Organization of the OPERA research programme
- ❖ 7 Work Packages
- ❖ Programme is **fincanced** by the government (Ministry of Economic Affairs) and the energy sector, and coordinated by COVRA, the Dutch WM organization

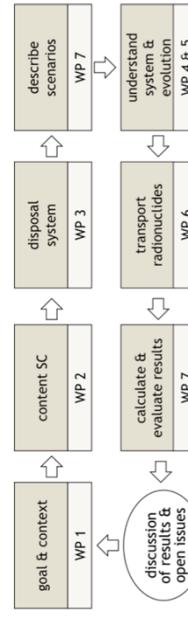

8

OPERA

Onderzoeks Programma Eindberging Radioactief Afval
Research Programme into Geological Disposal of Radioactive Waste

- 2011-2016
- Revitalization of the Dutch research on geological disposal
- Resolving outstanding issues from previous programmes
- Develop and preserve expertise and knowledge
- Focus on Boom Clay (but rock salt is not forgotten)
- **Result of OPERA:**
Detailing a first roadmap for the long-term research on geological disposal of radioactive waste in the Netherlands

7



OPERA WP2: Safety Case

- ❖ **WP2:** Set-up and definition of Safety Cases for disposal in Zechstein rock salt and Boom Clay
- Project **OSSC** – OPERA Salt Safety Case


- ❖ Evaluate the present knowledge about the safety and feasibility of a final disposal facility in **rock salt** in the Netherlands
- ❖ Available national (ICK, OPLA, CORA), and international (German and US) information about the final disposal in rock salt
- ❖ Put the information in the framework of a **Safety Case**
- ❖ Project Partners: GRS, TNO, NRG



9

Structuring the Information

- ❖ Methodology adopted from IAEA SSG-23 (2012), as further developed in IAEA project PRISM
- ❖ Components of the Safety Case

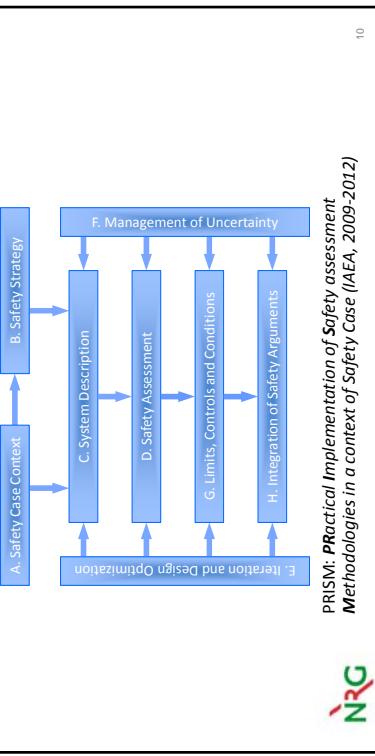

10

OSSC - Evaluation of FEPs

Example - Convergence

Convergence (2.1.07.01)	
Short description	FEP relates to the cross-sectional reduction of underground cavities and openings, starting after the excavation due to stress redistribution
Index	PROSA
VSG	WIPP
Judgement	W20 Salt Creep
Open questions	W21 Change in the Stress Field 3.3.3 Convergence of Openings


The table shows convergence examples for different projects. VSG and PROSA relate to the cross-sectional reduction of underground cavities and openings, starting after the excavation due to stress redistribution. WIPP relates to W20 Salt Creep. W21 Change in the Stress Field and 3.3.3 Convergence of Openings are also mentioned.



Structuring the Information - Example

Safety Case Component: System Description

- ❖ Objective and Scope
 - Current inventory of the OPERA reference database
 - Inventory for alternative waste scenarios in NL
- ❖ Facility Designs
 - Early design studies
 - Designs considered in OPLA
 - Designs considered in CORA
 - Designs considered in Germany
 - Designs considered in USA
 - Salt formations in the Netherlands
 - General information
 - Maps
 - Salt domes
 - Aquifers surrounding rock salt
 - Knowledge gaps
 - ❖ Biosphere Characteristics
 - Evaluation

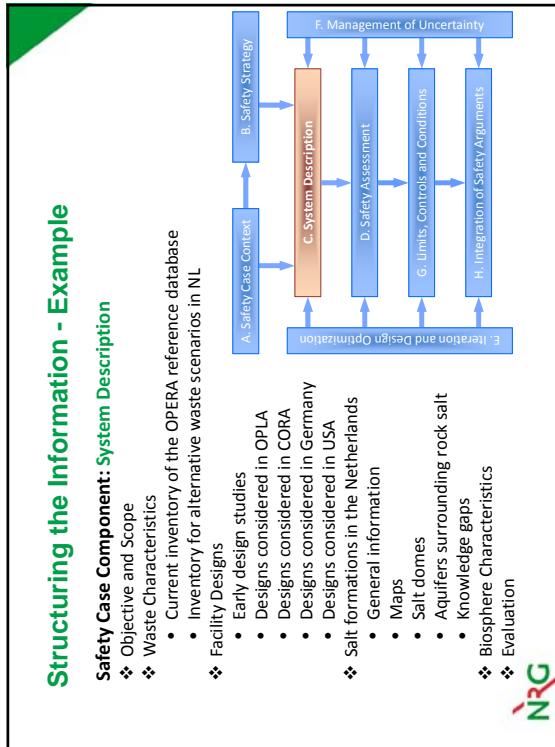

Conclusions (Preliminary)

- ❖ OSSC provides an evaluation of current knowledge for building the Safety Case for salt based repositories in the Dutch context
- ❖ For structuring the abundant information the methodology has been adopted as outlined in IAEA SSG-23 (2012), as further developed in IAEA project PRISM
- ❖ The main recommendation to proceed further with the development of the Salt Safety Case in the Netherlands is to establish and fix a final disposal facility in rocksalt. Subsequently, all Safety Case related aspects need to be revisited
 - After approval by COVRA, the reports will made available at www.covra.nl



13

Research performed at Utrecht University


- ❖ Long term mechanical and transport properties of salt rocks – experiments and model development
- ❖ Nawaz Muhammad (PhD), Chris Spiers
 - Micromechanical mechanisms governing plastic flow of natural rocksalt
 - Pressure solution creep occurring in natural salt under in-situ conditions
 - Competition between microcrack growth and healing affecting the evolution of porosity and permeability
 - Feedback effects of brine penetration on mechanical behaviour and on-going dilatation and permeability evolution



14

Utrecht University – Some Results

Relaxation test shows change in behaviour of wet salt

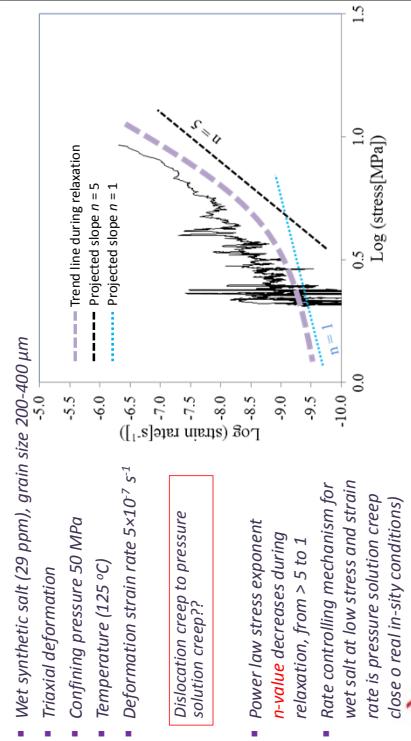

15

Acknowledgement

- ❖ Messrs. Jacques Grupa, Arjen Poley and other colleagues from NRG for their support, input and review efforts
- ❖ The German colleagues from GRS for providing valuable feedback and relevant input
- ❖ Messrs Nawaz Muhammad and Chris Spiers for providing the UU input
- ❖ The research leading to these results has received funding from the Dutch research programme on geological disposal OPERA



16



Status of the US-German Joint Project on the Comparison of Constitutive Models for Rock Salt

5th US-German Workshop on Salt Repository Research, Design and Operation

September 7-11, 2014, Santa Fe, NM, USA

Andreas Hampel, Scientific Consultant, Mainz, Germany

Abstract

In 2004, six German institutions started a joint project series on the comparison of constitutive models for the thermo-mechanical behavior of rock salt. General aims are 1) to investigate and check the abilities of the advanced models of the participants to describe correctly and reliably the relevant thermo-mechanical deformation phenomena in rock salt and their dependencies on boundary conditions, 2) to check and compare their procedures for the determination of salt type-specific model parameter values, and 3) to compare their procedures for the performance of numerical calculations of rock salt around underground openings. Reliable and well-tested models and procedures are required for numerical simulations performed e.g. for the design, stability analysis, and evaluation of the long-term behavior of underground repositories for radioactive wastes in rock salt.

The current third project (2010-2016) is a US-German collaboration of the following partners:

From Germany:

- Dr. Andreas Hampel (AH), Scientific Consultant, Mainz
- Institut für Gebirgsmechanik GmbH (IfG), Leipzig
- Karlsruher Institut für Technologie (KIT), Karlsruhe
- Leibniz Universität Hannover (LUH), Hannover
- Technische Universität Braunschweig (TUBS), Braunschweig
- Technische Universität Clausthal (TUC), Clausthal-Zellerfeld

From the United States:


- Sandia National Laboratories (SNL), Albuquerque, NM

In this project, selected benchmark calculations are carried out in order to check the ability of the involved models to describe correctly 1) the temperature influence on deformation and 2) the damage and dilatancy reduction and healing of rock salt. This contribution focuses on the second part.

At first, a unique set of model parameter values for the salt type around the subsequently calculated in-situ structure was determined with back-calculations of an extensive and systematic series of laboratory creep, strength, and healing tests. Then, several 3-D simulations of an old bulkhead structure in the Asse II salt mine in Germany were performed. The corresponding drift was excavated in 1911. After three years, a 25 m long section was lined with a cast steel tube, the residual gap between the tube and the salt contour was filled with concrete. Each partner calculated the structure with his constitutive model for a period of 88 years after the excavation. For comparison, he also calculated the open drift without the bulkhead for the same period of time.

In the presentation, a brief general overview of the project series, a summary of the calculations, some comparisons of results of the partners, and proposals for future collaborations are given.

Project Partners

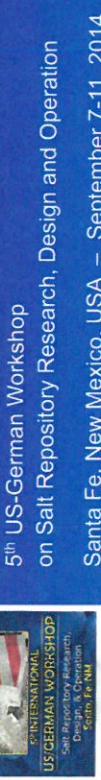

From Germany (since 2004):

Dr. Andreas Hampel, Scientific Consultant, Mainz
Institut für Gebirgsmechanik (IfG), Leipzig
Karlsruher Institut für Technologie (KIT), Karlsruhe
Leibniz Universität Hannover (LUH), Hannover
Technische Universität Clausthal (TUC), Clausthal-Zellerfeld
Technische Universität Braunschweig (TUBS), Braunschweig (since 2010)

Update on the “Joint Project on the Comparison of Constitutive Models for Rock Salt”



Joint Project III on the Comparison of Constitutive Models for Rock Salt		
	Managed by IfG Project Management Agency Salzburg	
	Institute for Geotechnics and Earth Sciences Leibniz Institute for Earth and Space Research	
	Karlsruhe Institute of Technology	
	DBETEC Technologies for Geotechnical Engineering	

From the United States (since 2010):

Sandia National Laboratories, Albuquerque & Carlsbad, New Mexico

5th US-German Workshop on Salt, Santa Fe, New Mexico, USA – September 7-11, 2014
Update on the Joint Project on the Comparison of Constitutive Models for Rock Salt


Three Joint Projects on the Comparison of Constitutive Models for Rock Salt

Project	Period	Main Objectives:
I	2004 – 2006	Document, check and compare ... capabilities of the models to describe reliably the relevant deformation phenomena in rock salt
II	2007 – 2010	the suitability of the models to perform 3-D simulations, predictions of the future behavior, calculations of permeability ... the modeling of temperature influence on deformation (part I): • performance of many creep & strength tests with Asse-Speisesalz (IfG) ➢ back-calculations of the lab tests, determination of parameter values • simulations of in-situ borehole tests IFC (isothermal) & HFCP (heated) the modeling of damage reduction & healing of rock salt ... the performance of high-precision healing tests with Asse-Speisesalz (TUC) ➢ back-calculations of the healing tests, determination of par. values simulation of the “Dammjoch” (bulkhead) in the Asse mine ... the modeling of temperature influence on deformation (part II): o performance & back-calculations of many creep & strength tests with clean salt & argillaceous salt from WIPP (IfG & TUC) o simulations of Rooms D (isothermal) & B (heated) at WIPP
III	2010 – 2016	

5th US-German Workshop on Salt, Santa Fe, New Mexico, USA – September 7-11, 2014
Update on the Joint Project on the Comparison of Constitutive Models for Rock Salt



Back-Calculations of Laboratory Deformation Tests with one Salt Type


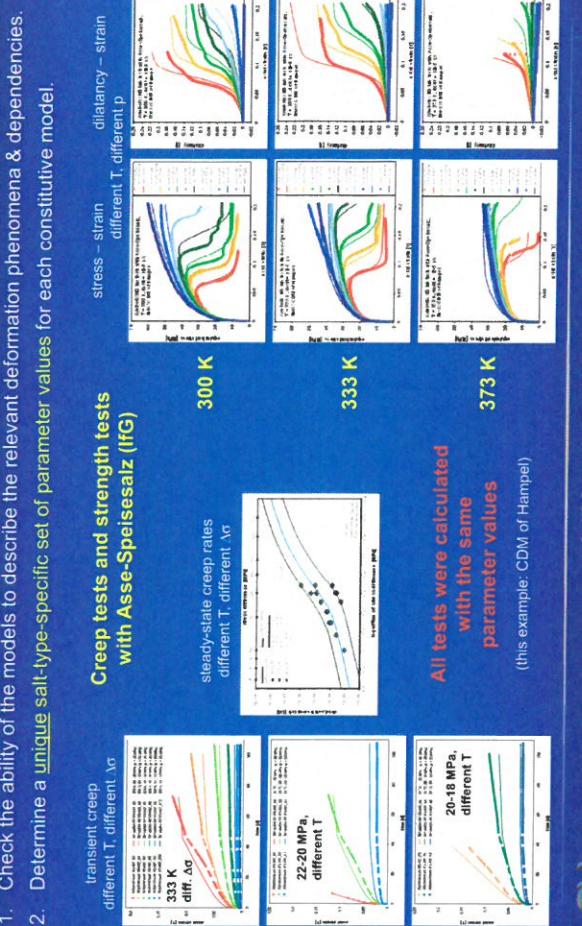


5th US-German Workshop on Salt, Santa Fe, New Mexico, USA – September 7-11, 2014
Update on the Joint Project on the Comparison of Constitutive Models for Rock Salt



102 Back-Calculation of Laboratory Healing Tests

dilatancy calculated with the unique set of parameter values

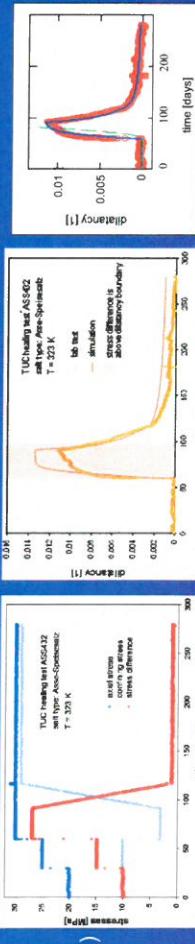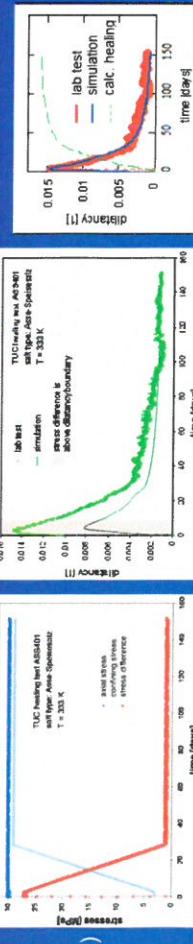


Back-calculations of Hampel (model: CDM, salt type: Asse-Speisezeit)

Dr. Andreas Hampel


5th US-German Workshop on Salt - Santa Fe, New Mexico, USA, September 7-11, 2014
Update on the "Joint Project on the Comparison of Constitutive Models for Rock Salt"





"Dammjoch" (bulkhead) in a drift at 700 m depth in the Asse Mine

1911: drift excavated. 1914: 25 m long section lined

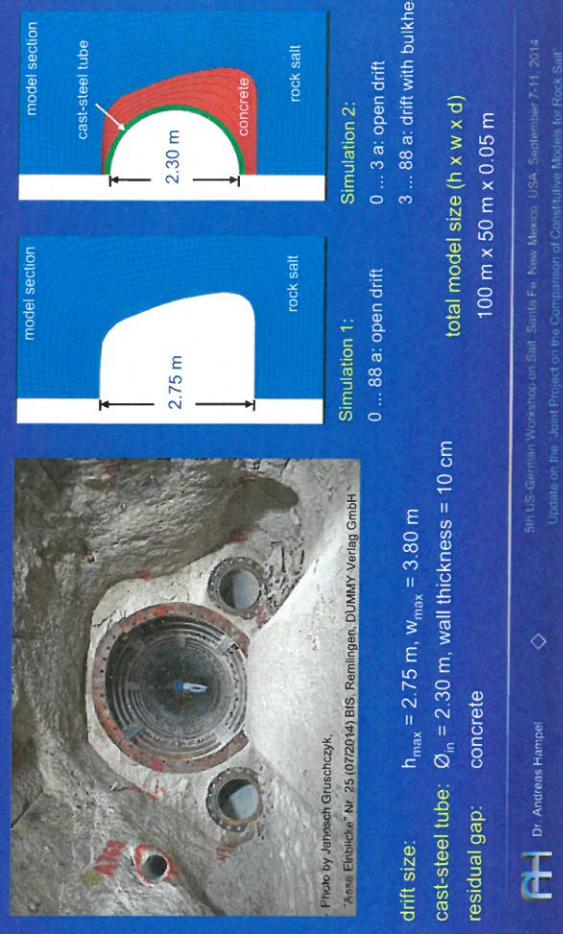

Deformation (Displacements) of the open drift 88 years after excavation

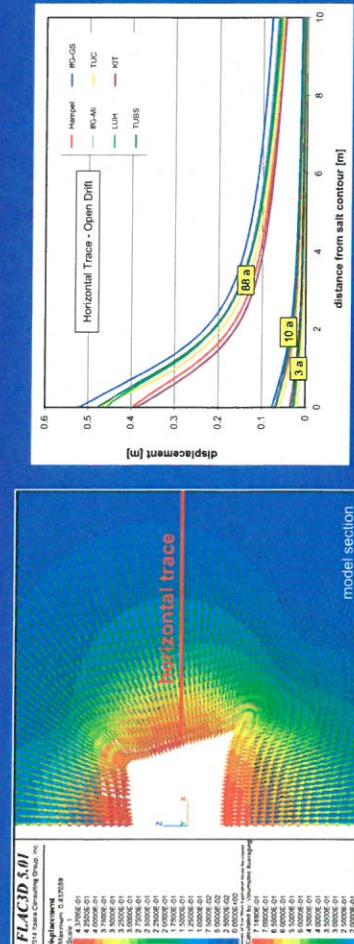

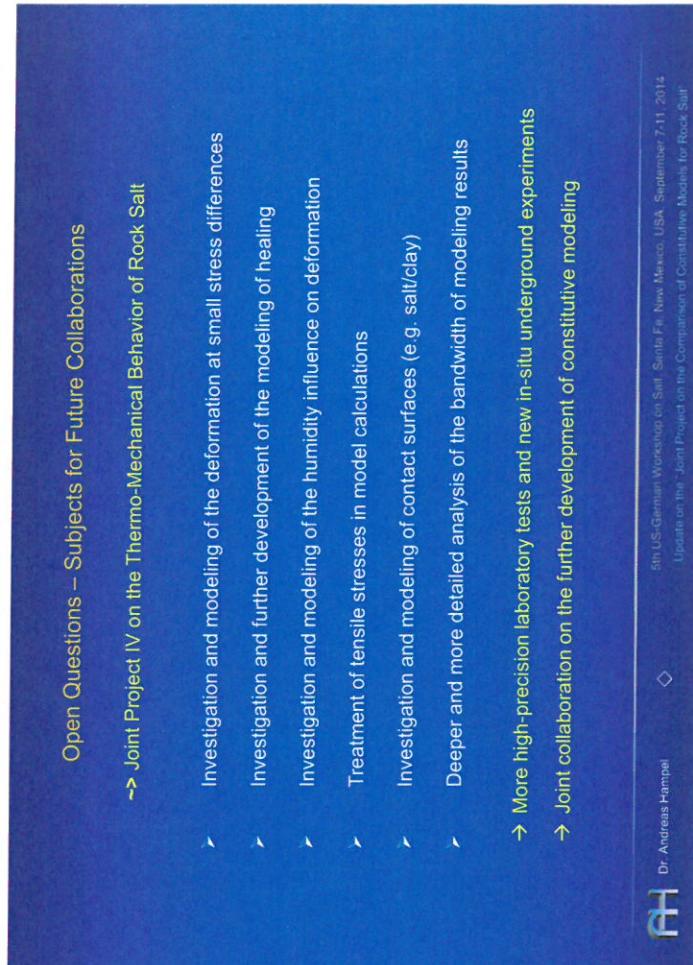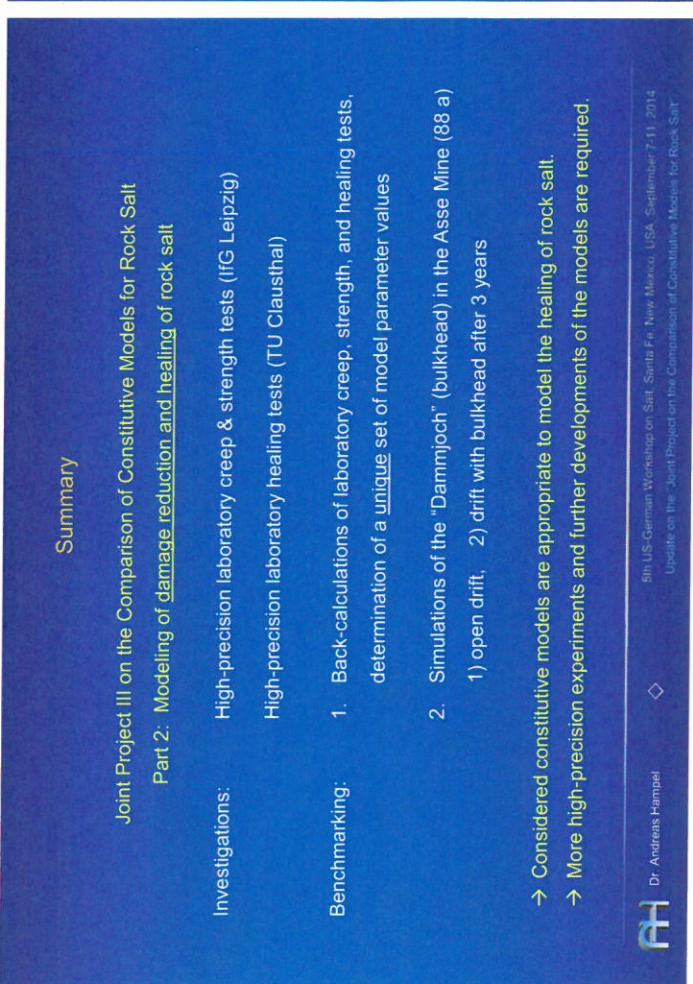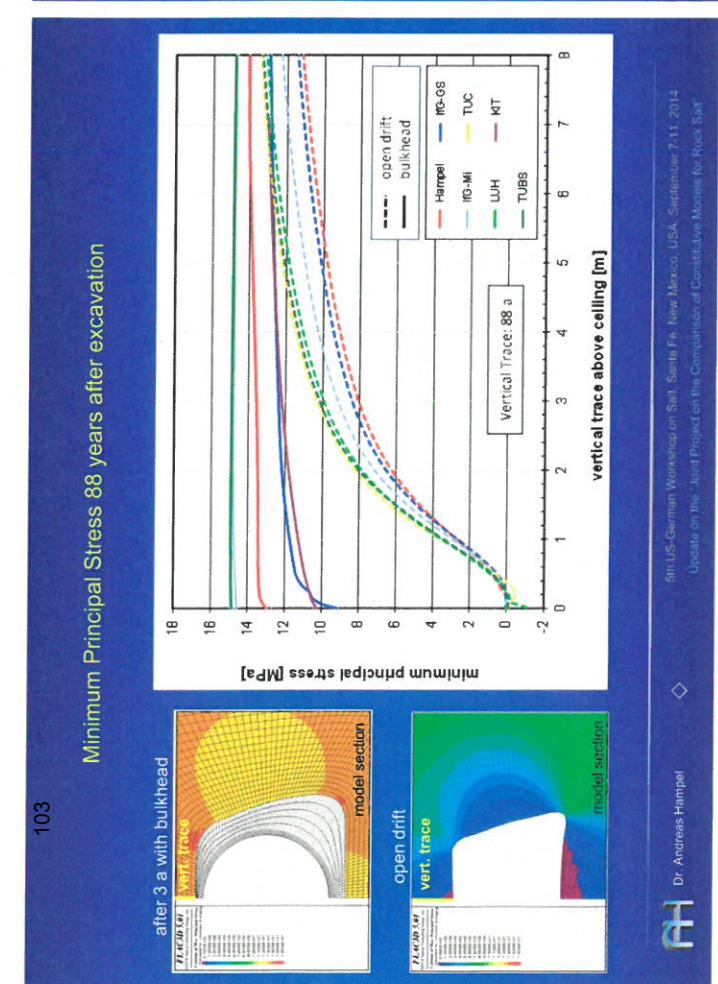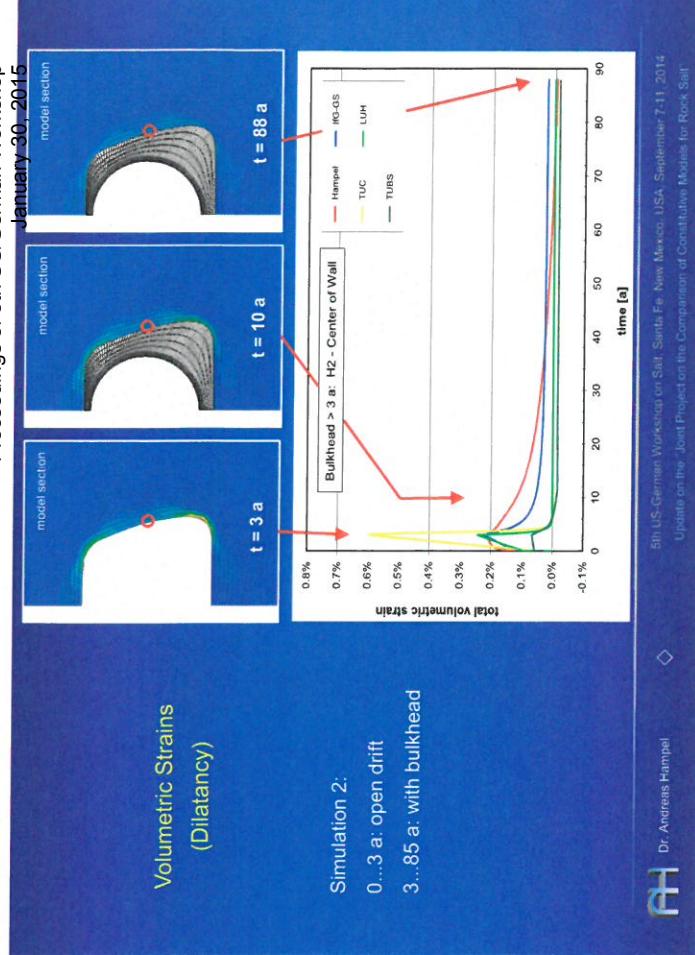

Modeling WIPP Rooms B/D
5th International US-German Workshop on Salt Repository Research, Design and
Operation to be held in Santa Fe, NM

Sept. 7-12, 2014

J. Guadalupe Argüello

Sandia National Laboratories

Albuquerque, NM, USA

Abstract

The US-German “Joint Project on Comparison of Current Constitutive Models and Simulation Procedures on the Basis of Model Calculations of the Thermo-Mechanical Behavior and Healing of Rock Salt,” hereafter known as “Joint Project III,” has been extended from its original scope to include two additional benchmarking problems based on full-scale in-situ tests conducted in the early 1980’s at the Waste Isolation Pilot Plant (WIPP), located in Southeastern New Mexico, USA. The isothermal “Mining Development Test,” WIPP Room D, and the heated “Overtest for Simulated Defense High-Level Waste,” WIPP Room B are the two test rooms that are being modeled. Both of these rooms are among a series of excavations at the WIPP that have been modeled in the past by Sandia, prior to WIPP licensing, using legacy numerical codes and techniques of the time [1].

Approximately thirty years of hardware and software advances have occurred since that time and those advancements have yielded a new generation of massively parallel multi-physics computational capabilities, embodied in the SIERRA Mechanics code suite, to support the Sandia engineering sciences mission. With SIERRA Mechanics, an unprecedented level of fidelity can be incorporated into the models of the room. Heretofore Sandia’s recent efforts on WIPP Rooms D & B [2, 3] had been aimed at duplicating the legacy calculations of those rooms using roughly the same level of mesh discretization that was available at the time, and we were able to show that comparable results to the legacy ones could be obtained with SIERRA Mechanics for the thermo-mechanical response of the rooms. In this work we extend the previous work and show some of the results from Sandia’s latest efforts as we have attempted to model these rooms, exercising the SIERRA code suite on models at levels of fidelity unobtainable in the 1980’s, and compare simulation results to the data obtained from these full-scale tests. This has been done in an effort to arrive at an updated definition of the two benchmark problems that will be exercised under the US-German Joint Project III. The results from these efforts are important and pertinent to arriving at a set of agreed-to benchmark problems that will be analyzed by all participants.

References

1. Munson, D. E. 1997. Constitutive Model of Creep in Rock Salt Applied to Underground Room Closure. *Int. J. Rock Mech. Min. Sci.* 34:2 233-247.
2. Argüello, J.G. and J.S. Rath. 2012. SIERRA Mechanics for Coupled Multi-Physics Modeling of Salt Repositories. In Proceedings of the 7th Conference on the Mechanical Behavior of Salt, Paris, France, 16-19, April 2012, eds. P. Bérest et al, 413-423. London: Taylor & Francis Group.
3. Argüello, J.G. and J.S. Rath. 2013. Revisiting the 1980’s WIPP Room D and B In-Situ Experiments: Performing Thermo-Mechanical Simulations of Rock Salt Using a State-of-the-Art Code Suite. In Proceedings of the 47th US Rock Mechanics/ Geomechanics Symposium, San Francisco, June 23-26 2013, ARMA 13-370. :ARMA.

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy’s National Nuclear Security Administration under contract DE-AC04-94AL85000. SAND2014-16885A.

Exceptional service in the national interest

Sandia National Laboratories

September 2014

Modeling WIPP Rooms D and B

J. Guadalupe Arguello

5th International US-German Workshop on Salt Repository Research, Design and Operation

Santa Fe, NM, September 2014

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. Copyright 2014, Sandia Corporation. All rights reserved.

DOE/Techology GmbH

PTKA Project Management Agency Karlsruhe

DOE/NASA National Institute of Standards and Technology

International US-German Workshop on Salt Repository Research, Design and Operation, Santa Fe, NM

WIPP Experiments of Early 80's

Several Thermal-Structural Interactions (TSI) Experimental Rooms Fielded at the Waste Isolation Pilot Plant (WIPP) in the early 80's

Experimental WIPP Rooms D & B are of special interest & well-suited for benchmarking

TESTS

- A. IN-WIPP WORKUP
- B. MINING DEVELOPMENT
- C. GEOMECHANICAL EVALUATION
- D. IN-SITU THERMAL TESTS (THERMO-MECHANICAL)
- E. ISOLATED C/P IN SALT AND MUD ROCK INTERFACE INTERACTIONS
- F. PLUGGING AND SEALING
- G. IN-SITU THERMAL AND MECHANICAL TESTS
- H. WASTE PACKAGE PERFORMANCE, SIMULATED
- I. SITE PRELIMINARY DESIGN VALIDATION

Legend:

- TESTS
- IN-SITU THERMAL TESTS
- THERMO-MECHANICAL TESTS
- PLUGGING AND SEALING TESTS
- IN-SITU THERMAL AND MECHANICAL TESTS
- WASTE PACKAGE PERFORMANCE, SIMULATED TESTS
- SITE PRELIMINARY DESIGN VALIDATION TESTS


Why are WIPP Rooms D & B Well-suited for Benchmarking?

- Except for the heat load in Room B, both rooms are essentially identical
 - Located in the same general area of WIPP
 - Relatively "isolated" from other workings
 - 5.5 X 5.5 m in cross-section (~100 m long)
 - At the same horizon and thus in the same vertical stratigraphic location
 - Tests conducted under rigorous Quality Assurance
 - Gages calibrated to NIST standards
 - Were extensively instrumented and data were taken for approximately 3.5 years (1300-1400 days) after excavation
 - Comprehensive datasets archived and available for benchmarking efforts

Benchmarking WIPP Rooms for JP II

- "Joint Project III" was extended to include two additional benchmarking problems based on in-situ full-scale tests conducted in the early 1980's at the Waste Isolation Pilot Plant (WIPP), located in Southeastern New Mexico, USA
 - The Isothermal Mining Development Test – WIPP Room D
 - The heated Overtest for Simulated Defense High-Level Waste – WIPP Room B
 - Work on WIPP salt (lab tests and Rooms D & B) is again related to temperature dependence and is thus an extension of the first benchmarking problem
 - Larger rooms
 - Quadrilateral cross-section
 - More importance of damage (at least at corners and possibly roof)
 - At different temperatures than in IFC & HFCP tests

WIPP Room D Coarse Mesh

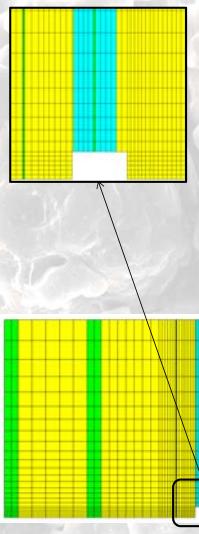

Coarse FEM mesh used originally with Sierra Mechanics transmitted to German partners:

- 503 nodes & 2184 hexahedral elements
- 4 element blocks – halite, argillaceous halite, anhydrite, & polyhalite
- 9 clay seams nearest room included as sliding surfaces
- Tractions of 13.57 MPa at top & 15.97 MPa at bottom of model
- Rlerred B.C.s on both sides and Fixed B.C. near top right

5

Mechanical Modelling Parameters (Cont'd)

- Anhydrite and Polyhalite modeled with an elastic/perfectly-plastic Drucker-Prager criterion: $F = \sqrt{J_2} + aJ_1 - C$



where

$$J_1 = \sigma_{kk}$$

$$J_2 = \frac{1}{2}S_{ij}S_{ji}$$

a, C = material constants

with parameters as shown in table below.

Material	E (MPa)	ν	a (MPa)	C (MPa)
Anhydrite	75,100	0.35	0.450	1.35
Polyhalite	55,300	0.36	0.473	1.42

- Clay seams modeled as sliding surfaces with M-C behavior: $\tau = \mu\sigma_n$ with $\mu=0.2$
- Initial stress set to lithostatic stress varying linearly with depth

7

Mechanical Modeling Parameters for Use in WIPP Room D/B Calculations


Parameters	Units		Salt
	G MPa	E MPa	
Elastic Properties	2.000	21,000	
Young's modulus	—	—	0.25
Poisson's ratio	—	—	0.25
Structure Factors			
A_1			8.386e10 ²
B_1			6.086e10 ²
s^t			6.8e+00
A_2			9.672e10 ³
B_2			1.1e+00
A_3			3.029e10 ²
B_3			4.289e10 ²
Activation energies	Q cal/mole	E cal/mole-K	
Universal gas constant	10.00	8.314	
Absolute temperature	T K		1987
Creep Properties	n_c	n_b	
Stress limit of the dislocation slip mechanism	σ_p MPa		20.57
Stress constant	M	M	5.35
Transient strain limit constants	K_p	K_b	3.0
	ε_c K ⁻¹	ε_b K ⁻¹	6.275e-10 ²
Constants for work-hardening parameter	α	β	1.032e-100
Recovery parameter	δ	δ	9.998e10 ³
			17.37
			—
			0.58

Note: Models based on details provided in Munson, 1997. *Int. J. Rock Mech. Min. Sci.* 34:233-247 (& supplemental information not provided there)

- All boundaries in “red” assumed to be adiabatic
- Boundaries sufficiently remote to preclude affecting room response for duration of simulation
- Entire formation prescribed to have an initial temperature of 300 K
- The drift area (in “purple”) assumed to consist of an “equivalent thermal material” (ETM)
- ETM has a constant high conductivity of 50 W/(m·K) & a high thermal diffusivity [C_P of 1,000 J/(kg·K) and a density of 1 kg/m³]
- This presumably simulates radiative heat transfer in the room by an equivalent conduction
- Clay seems to be neglected in thermal analyses

6

Thermal Modeling Parameters for Use in WIPP Room B Calculations

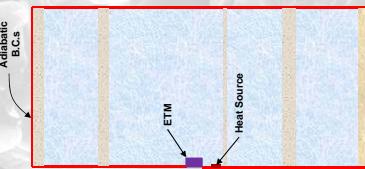

8

Thermal Modeling Parameters (Cont'd.)

Heat transfer through salt, anhydrite, and polyhalite modeled with a nonlinear thermal conductivity of the form:

$$\lambda = \lambda_{300} (300/T)^Y$$

where λ is the thermal conductivity, T is the absolute temperature in Kelvin, and λ_{300} & Y are material constants.


The various parameters are given in table below and include:

- C_p – the specific heat;
- α – the coefficient of linear thermal expansion; and
- ρ – the material density.

Material	C_p J/(kg·K)	α 10^{-6} K^{-1}	λ_{300} $W/(m·K)$	γ	ρ kg/m^3
Salt	862	$45 \cdot 10^{-6}$	5.4	1.14	2,300
Anhydrite	733	$20 \cdot 10^{-6}$	4.7	1.15	2,300
Polyhalite	890	$24 \cdot 10^{-6}$	1.4	0.95	2,300

9


Refining the Room D Model in Line with Current Generation Capability



- New generation of computational tools allows more refined mesh, in line with current practice/standards, to better-capture stress gradients
- Mesh shown here includes ~8X the number of elements as the coarse mesh (not possible with machines of mid-80s to early 90s).
- With refined mesh, computed vertical closure is greater than that computed with coarse mesh, for either the all-salt or with complete stratigraphy cases
- Computed results bracket the measurements

11

Room D Model Matching Capability Available in Mid-80s to early 90s



- Original mesh coarse by today's standards, but similar to what was possible in the mid-1980s to early 1990s, in terms of computational capability
- With this mesh, computed vertical closure comparable to measured values (using all-salt stratigraphy, as apparently done in past)
- With this mesh and the complete stratigraphy, computed vertical closure is less than the measured closure

10

Summary & Conclusions

- Initial efforts on WIPP Room D underway
- Original coarse mesh with various details transmitted to German partners
- Additional information needed for the benchmarking effort has been identified and will be transmitted
- Using original mesh with all-salt idealization, the computed Room D vertical closure with SIERRA Mechanics agrees reasonably well with the measurements.
- Refinement of Room D model to conform with modern standards/practice leads to greater vertical closure than measurements for the all-salt idealization but less than measurements for the full stratigraphy
- Appears that in legacy model, MD parameters (& other features, e.g., μ for clay seams) were calibrated to match the tests using a relatively coarse mesh acceptable at the time
- This remains an open question that we hope to answer under JP II
- Implies that a common refinement of the room model among the partners may be needed to make appropriate comparisons among the results of the various partners participating in the benchmark

12

Laboratory Tests on WIPP Salt

Argillaceous Salt update

U. Düsterloh, K. Herrchen, K.-H. Lux

Lehrstuhl für Deponietechnik und Geomechanik, TU Clausthal, 38678 Clausthal, Germany

In cooperation with T. Popp, K. Salzer

Institut für Gebirgsmechanik GmbH (IfG), 02479 Leipzig, Germany

1. Objective

A joint project on the comparison of constitutive models for rock salt funded by BMWi started in 2004. The joint project includes procedures for the determination of characteristic salt type-specific model parameter values and for the performance of numerical calculations of underground openings in rock salt. Within the current project selected benchmark calculations for room D and room B of WIPP site are planned in order to check the ability of the involved models to describe correctly the in situ load bearing behavior.

Based on investigations in the 80's to 90's a comprehensive data base regarding the stress-strain and creep behavior of WIPP salt exists. But, due to the development of new constitutive laws considering damage processes, specific material parameters are missing. Therefore a laboratory program was planned and realized to determine the load bearing capacity of rock salt from WIPP taken into account demands from different constitutive laws used by the partners of the joint project. To realize the laboratory program 5.5 tons of core material from WIPP was drilled and shipped by Sandia to Germany. Based on this core material IfG has prepared more than 150 cylindrical samples of clean salt as well as argillaceous salt. Clean salt in general was investigated by IfG, argillaceous salt in general was investigated by TUC. The test program, the test procedure and the results observed from triaxial short term tests to determine failure and dilation strength and triaxial long term tests to determine damage free and damage induced creep parameters are summarized in the following chapters.

2. Overview test program argillaceous salt

To enable a determination of strength, creep and damage parameter for argillaceous salt from WIPP taken into account different constitutive laws a lab program was evaluated by the project partners. The laboratory program planned for argillaceous salt from WIPP consists of 61 triaxial short term tests to determine failure strength as well as dilation strength depending on minimum principal stress, temperature and strain rate.

3. Test procedure and physical parameter

Prior to the lab tests in each case

- (a) sample length and sample diameter were measured half way up the height of the specimen and along the central axis of the confining specimen using a slide calliper gauge,
- (b) sample mass were measured using a balance,
- (c) the rock densities were calculated from the masses and volumes of the specimens using Eq. (3.1):

$$\gamma = \frac{4 \cdot m}{\pi \cdot d_0^2 \cdot h_0} \cdot g \quad (3.1)$$

- γ rock density (N/m^3)
- m specimen mass (kg)
- d_0 diameter of unstressed specimen (m)
- h_0 height of unstressed specimen (m)
- g gravity (m/s^2)

- (d) an unloaded ultrasonic wave velocity measurement was done using a dilatational wave analyser. The measured ultrasonic wave velocities of the P or longitudinal waves (v_p) and the S or transverse waves (v_s) were entered into Eqs. (3.2) and (3.3) to calculate the dynamic elasticity modulus E_{dyn} and the dynamic Poisson's number ν_{dyn} :

$$E_{dyn} = \frac{v_s^2 \cdot \rho \cdot (3v_p^2 - 4v_s^2)}{v_p^2 - v_s^2} \quad (3.2)$$

$$\nu_{dyn} = \frac{v_p^2 - 2v_s^2}{2 \cdot (v_p^2 - v_s^2)} \quad (3.3)$$

where

E_{dyn} dynamic elasticity modulus (kPa)

ν_{dyn} dynamic Poisson's number (-)

ρ rock density (t/m^3)

v_p longitudinal wave velocity (m/s)

v_s transverse wave velocity (m/s)

- (e) a digital photography was taken.

- (f) At the end of the procedure characterized by (a) to (e) the specimens have been positioned in the triaxial cell and undergoes in each case an approx. 24-hour recompaction and tempering phase under an isotropic stress level of $\sigma_{iso} = 20\text{ MPa}$ and a preset temperature level of 27°C , 60°C , 100°C respectively.

At the end of the recompaction phase, the specimens were subjected to an axial stress σ_1 at constant confining pressure $\sigma_2 = \sigma_3$ under a constant strain rate of $\dot{\epsilon}_1$. The next phase of the test involves maintaining constant confining load during a stress-controlled stress release and stress build-up cycle to determine the Young's modulus. The axial stress was then increased under constant compression rate until the failure load is reached or above. Measurement contains recordings of

- a) axial deformation by inductive transducers,
- b) the hydraulic pressure measured in the test cylinder by an absolute pressure transducer which has to be converted to determine the axial pressure acting on the specimen,
- c) the confining pressure by an absolute pressure transducer,
- d) the oil temperature within the annulus of the triaxial cell,
- e) the volume change of the specimen and
- f) the change in ultrasonic wave velocity.

The volume change was determined from the inductive readings of axial specimen deformation Δl and the volumetric change in the oil volume in the triaxial cell. The oil volume $\pm \Delta V$ displaced from the triaxial cell during the test was fed into a twin-chamber cylinder.

The damage strength $\beta_{1\text{dil-vol}}$ was determined on the basis of the volume change characterises. The axial stress which is corresponding to a minimum volumetric specimen deformation was identified as damage strength $\beta_{1\text{dil-vol}}$ (primarily damage deformation after exceeding $\min\varepsilon_{\text{vol}}$).

Ultrasonic transmitter and receiver are integrated within the cover and base pressure plates to determine the damage strength more precisely. The continuous transmission of the samples during the test to record the ultrasonic velocity enables the damage strength to be determined independently of the volume measurement on the basis of the stress level observed. This is done by detecting a reduction in ultrasonic travel times as a result of the development of physical damage (microfissures). Damage strength $\beta_{1\text{dil-vp}}$ was defined as the axial stress at which the ratio v_p/v_{p0} reaches a maximum.

Based on test results it could be stated, that argillaceous salt from WIPP is characterized by typical average values of $\bar{E}_{\text{dyn}} \approx \bar{E}_{\text{EW}} \approx 28000 \text{ MPa}$ and $\bar{\nu}_{\text{dyn}} = 0,278$. A dependency between density and Young's modulus respectively Poisson's ratio is not observed. It must be pointed out, that core material excavated in 2010 obviously is different from core material excavated in 2013. A reduced density can be observed for core material taken in 2010 in comparison to core material taken in 2013. May be this is caused by a drying effect during storage.

4. Results of short term tests to determine failure and dilation strength

Short term tests were performed at different temperatures of 27°C, 60°C, 100°C respectively and at different strain rates of $\dot{\varepsilon}_1 = 0,6\%/\text{min}$, $\dot{\varepsilon}_1 = 0,06\%/\text{min}$, $\dot{\varepsilon}_1 = 0,006\%/\text{min}$ respectively.

Depending on the preset strain rate and the total strain realized during the tests, the duration of the short term tests varied between some 170 minutes at minimum and 4.6d at maximum adding 1 day recompaction and tempering phase. In case of a testing temperature of 100°C additionally 1 day cooling phase must be considered prior to a dismounting of the sample.

The failure and dilation strength taken from tests is evaluated separately with respect to minimum principle stress, strain rate and temperature.

As a result a different between failure strength determined at core material excavated in 2010 and core material excavated in 2013 was observed. As mentioned above, the significant scattering of core material excavated in 2010 is assumed to be caused by drying during storage.

Referring to the observed dilation strength it must be pointed out, that due to the different between core material excavated in 2010 and core material excavated in 2013 some additionally tests are needed to evaluate an acceptably correlation between dilation strength and minimum principle stress.

5. Results of long term tests to determine damage free and damage induced creep rate

Lab tests to determine the damage free and damage induced creep behaviour are in general similar to classical creep tests. Simply the additionally online measurement of volume change and ultrasonic wave velocity enables to differ between damage free and damage induced parts of the observed total creep rate. The idea to differ between damage free and damage induced parts of the total creep rate is based on the knowledge of damage strength. Multi-level creep tests taken into account two load levels below damage strength to determine the damage free creep behaviour and one or two load levels above damage strength to determine the damage induced creep behaviour have been conducted. The damage induced part of the total creep rate at least can be calculated by a subtraction of the calculated damage free part of the total creep rate regarding to stress level three from the observed total creep rate during stress level three. Because the quantity of the damage induced creep rate

depends on the intensity of exceeding damage strength and - due to a time dependent accumulation of damage - additionally to the duration of exceeding damage strength, an online measuring of the damage process is required. In case the preset stress level is below dilation strength, no damage occurs and therefore no measure of dilatancy and ultrasonic wave velocity is needed.

Based on these measurements a first raw estimation of stationary and transient creep parameters corresponding to the constitutive model *Lux/Wolters* has been done. A typical correlation between creep rate and equivalent stress can be observed for argillaceous salt from WIPP. Determination of parameter to determine the damage induced creep rate is in progress.

6. Summary

A comprehensive data set for argillaceous salt from WIPP site has been prepared which in general allows determination of constitutive model parameters to carry out the planned benchmark calculations for room D and B. At now it is estimated that merely a few future tests will be needed to clarify questions regarding determination of model parameter.

Laboratory Tests on WIPP Salt argillaceous salt

funded by federal ministry of economic affairs and energy

1. Objective
2. Overview test program
3. Results of short term tests to determine failure and dilation strength
4. Results of long term tests to determine damage free and damage induced creep behavior
5. Characterization of material properties based on lab tests

5th US/German Workshop on Salt Repository Research, Design and Operations
Santa Fe – 9th September 2014
apl. Prof. Dr.-Ing. habil. U. Düslerich – Clausthal University of Technology – Chair for Waste Disposal Technologies and Geomechanics

apl. Prof. Dr.-Ing. habil. U. Düslerich
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop - Albuquerque
Salt Repository Research, Design and Operations

- Benchmark calculations of Room B and Room D
 - ⌚ A comprehensive data base for WIPP-salt exists from investigations in the 80 – 90's, but
 - ⌚ Due to the development of existing and new material laws tailored test series facilitating specific material parameters are missing.

Geomechanical characterization of the WIPP-rock salt:


- “clean salt” or “Halite”
- “argillaceous salt”
- Temperature effect

- ➔ Strength testing
- ➔ Creep tests


 Institut für Gebirgsmechanik
GmbH Leipzig

13. Workshop "Joint Project III: Comparison of Constitutive Models"
May 28.-29. 2014 - Sandia National Laboratories, Albuquerque

Drilling and wrapping of cores at WIPP - site

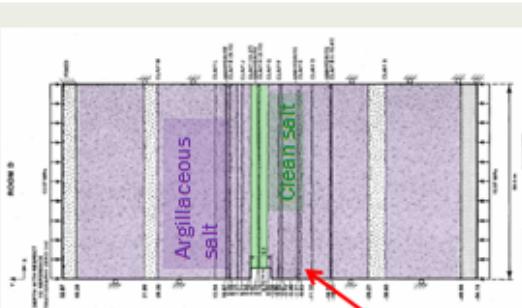

Lithology: „Clean salt“ – „Argillaceous salt“

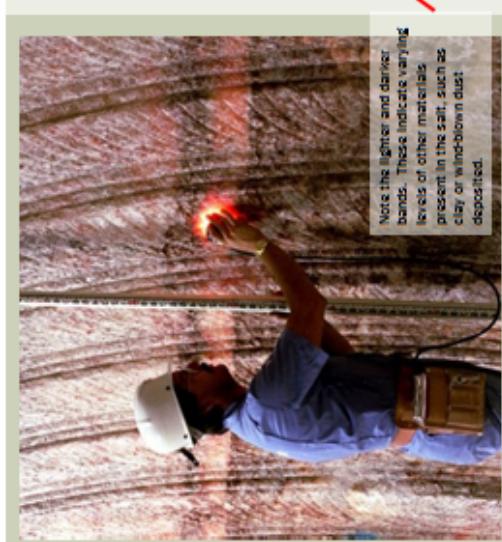

13. Workshop "Joint Project III: Comparison of Constitutive Models"
May 28.-29. 2014 - Sandia National Laboratories, Albuquerque

 Institut für Gebirgsmechanik
GmbH Leipzig

13. Workshop "Joint Project III: Comparison of Constitutive Models"
May 28.-29. 2014 - Sandia National Laboratories, Albuquerque

2


4

Preparation of a test specimen on a lathe




Laboratory program on argillaceous salt from WIPP to determine failure strength and dilation strength -

σ_3 MPa	strain rate 1/s	T °C	planned	carried out	in progress
0.2-20	1.00E-05	27	14	10	0
0.2-20	1.00E-05	60	14	19	0
0.2-20	1.00E-05	100	14	14	0
0.2-20	1.00E-04	27	5	0	5
0.2-20	1.00E-06	27	14	14	0
Σ		61	57	5	

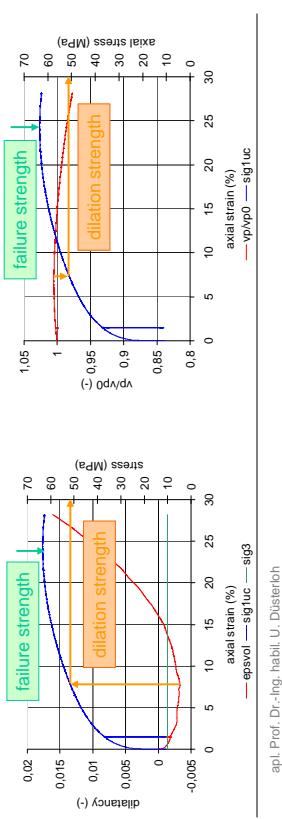

5th US/German Workshop – Santa Fe 2014

apl. Prof. Dr.-Ing. habil. U. Dürsteloh
Chair for Waste Disposal Technologies and Geomechanics

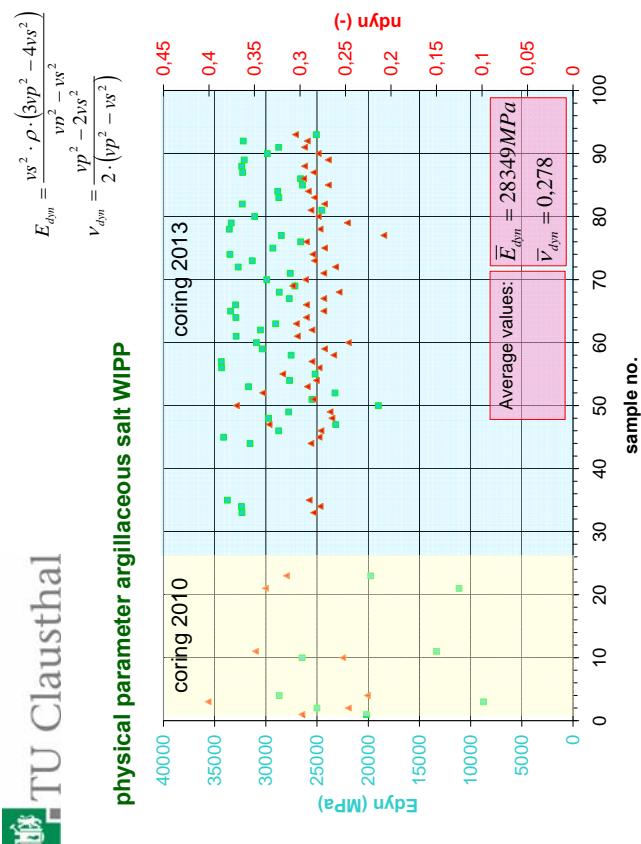


5th US/German Workshop – Santa Fe 2014

apl. Prof. Dr.-Ing. habil. U. Dürsteloh
Chair for Waste Disposal Technologies and Geomechanics

physical parameter argillaceous salt WIPP

$$E_{dyn} = \frac{v_s^2 \cdot \rho \cdot (3vp^2 - 4vs^2)}{vp^2 - vs^2}$$

$$V_{dyn} = \frac{vp^2 - vs^2}{2 \cdot (vp^2 - vs^2)}$$

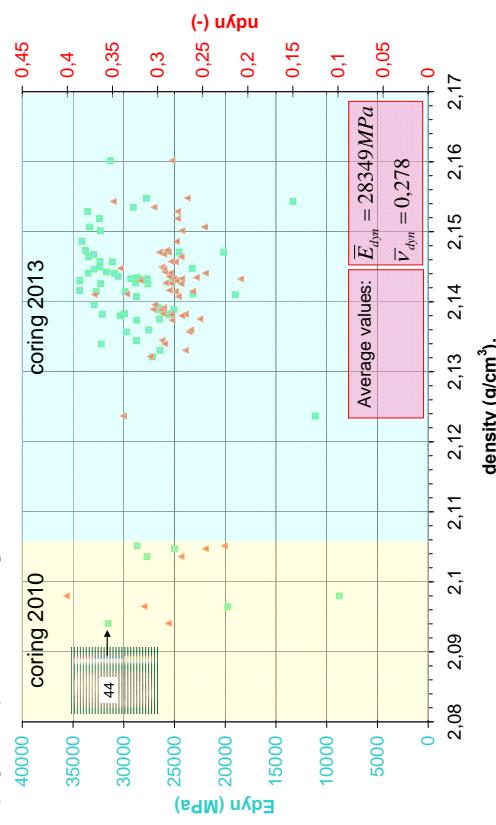


apl. Prof. Dr.-Ing. habil. U. Dürsterloh
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

10

physical parameter argillaceous salt WIPP

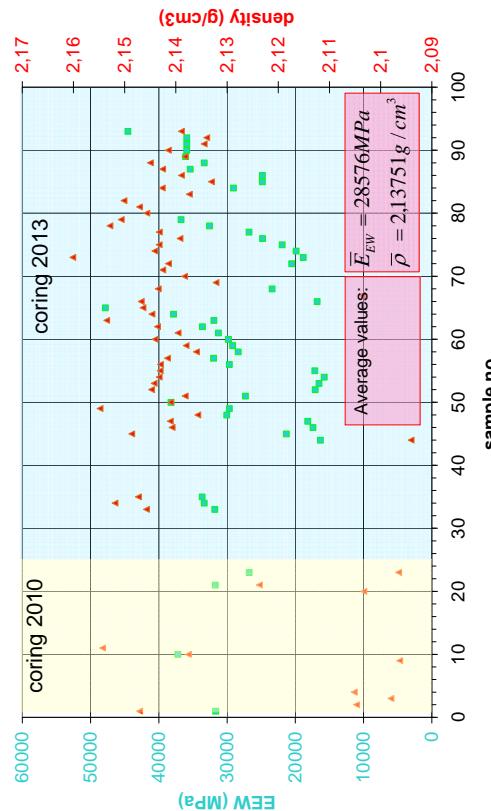


apl. Prof. Dr.-Ing. habil. U. Dürsterloh
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

11

physical parameter argillaceous salt WIPP

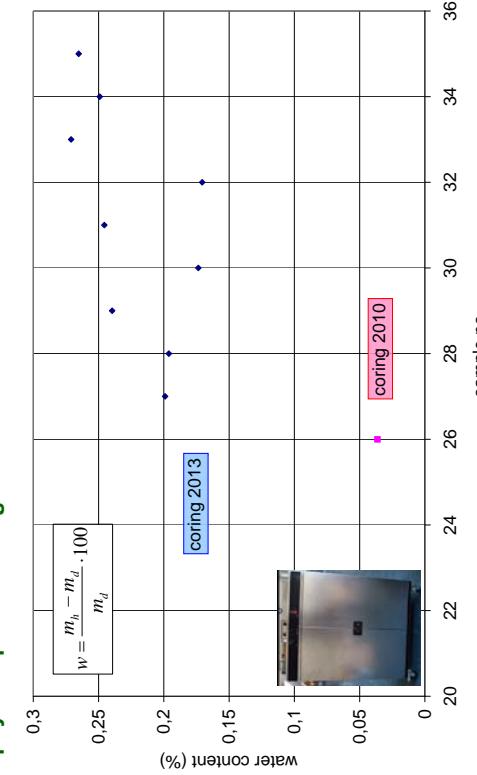


apl. Prof. Dr.-Ing. habil. U. Dürsterloh
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

11


strength tests argillaceous salt WIPP

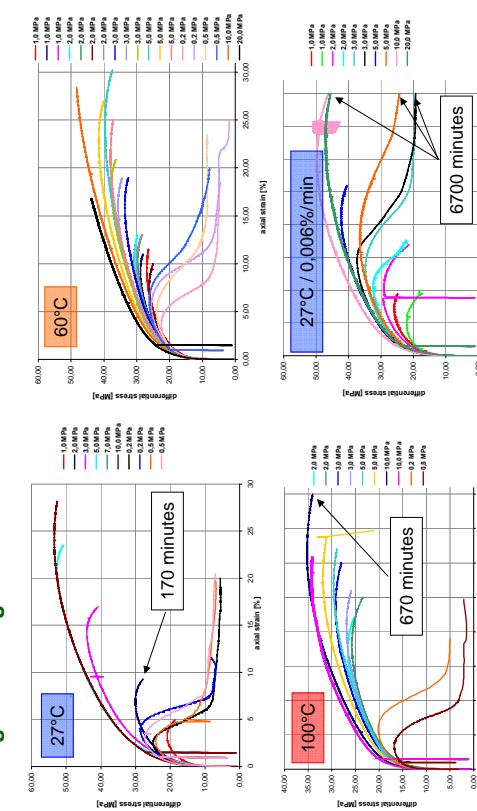

5th US/German Workshop – Santa Fe 2014

12


strength tests argillaceous salt WIPP

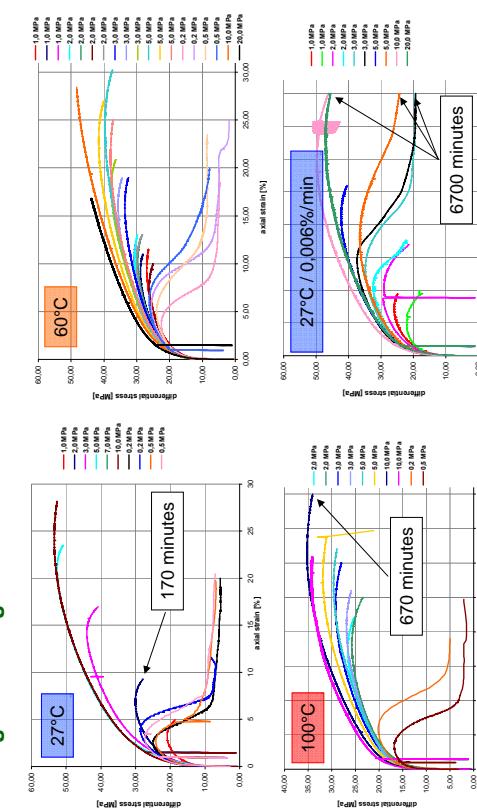

5th US/German Workshop – Santa Fe 2014


12

strength tests argillaceous salt WIPP

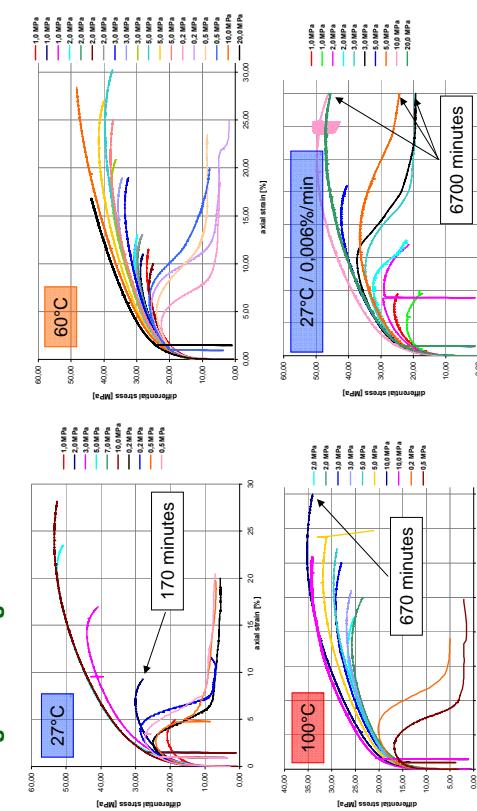


5th US/German Workshop – Santa Fe 2014


12

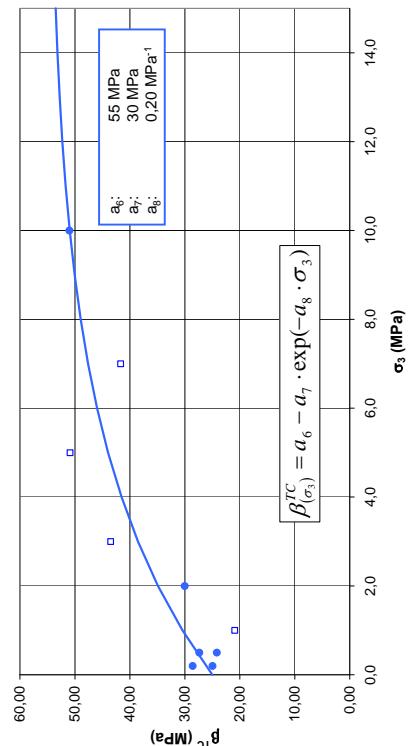Failure strength argillaceous salt WIPP


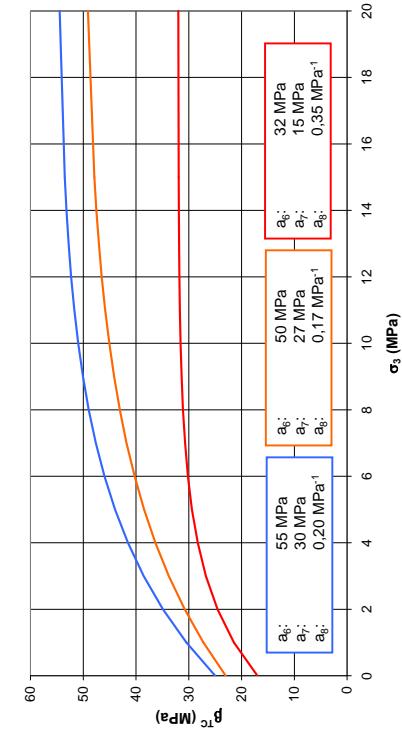
5th US/German Workshop – Santa Fe 2014
13

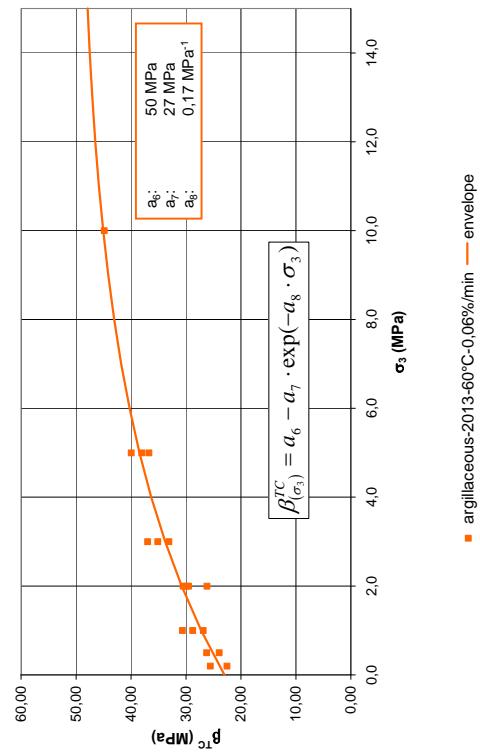Failure strength argillaceous salt WIPP


5th US/German Workshop – Santa Fe 2014
14

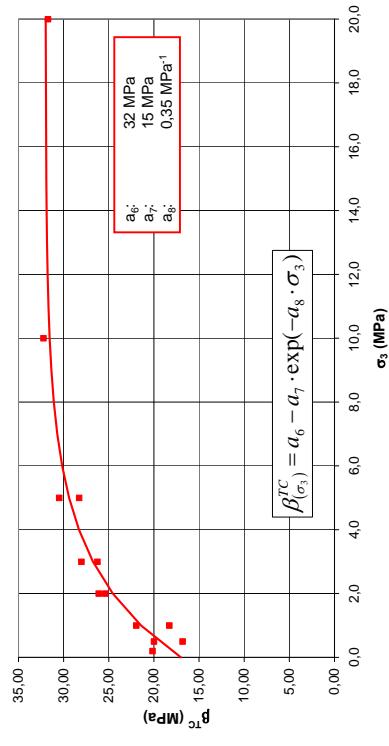
Failure strength argillaceous salt WIPP


5th US/German Workshop – Santa Fe 2014
15

Failure strength argillaceous salt WIPP


5th US/German Workshop – Santa Fe 2014
16

Failure strength argillaceous salt WIPP

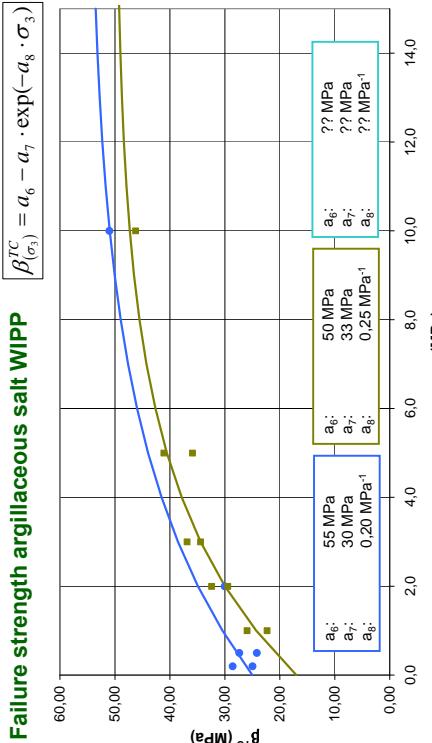


apl. Prof. Dr.-Ing. habil. U. Dürsterloch
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

17/7

Dilation strength argillaceous salt WIPP

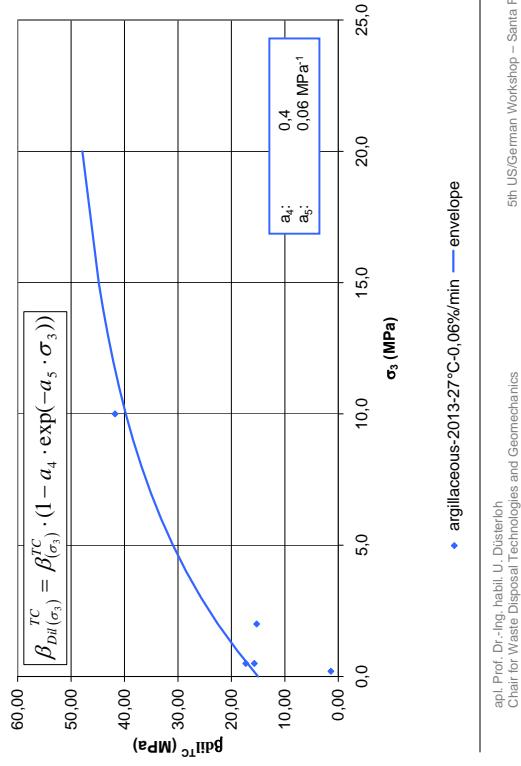


apl. Prof. Dr.-Ing. habil. U. Dürsterloch
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

18/7

Dilation strength argillaceous salt WIPP

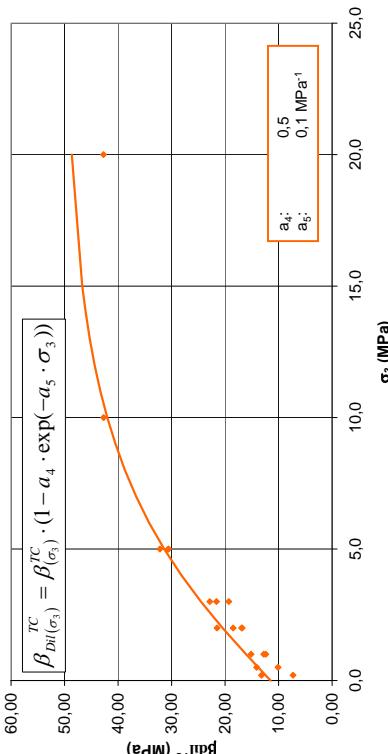


apl. Prof. Dr.-Ing. habil. U. Dürsterloch
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

19/7

Dilation strength argillaceous salt WIPP

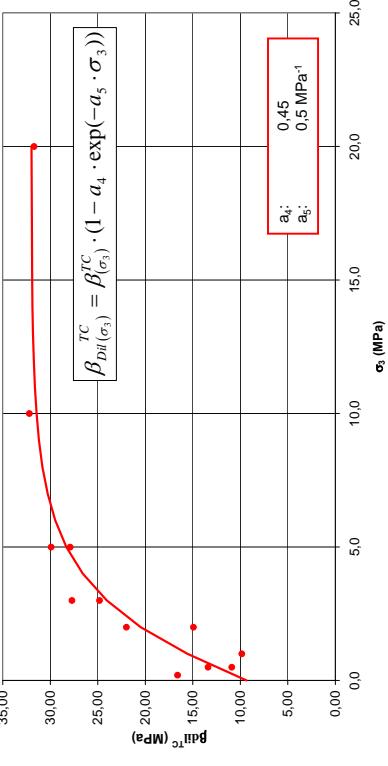


apl. Prof. Dr.-Ing. habil. U. Dürsterloch
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014

20/7


Dilation strength argillaceous salt WIPP

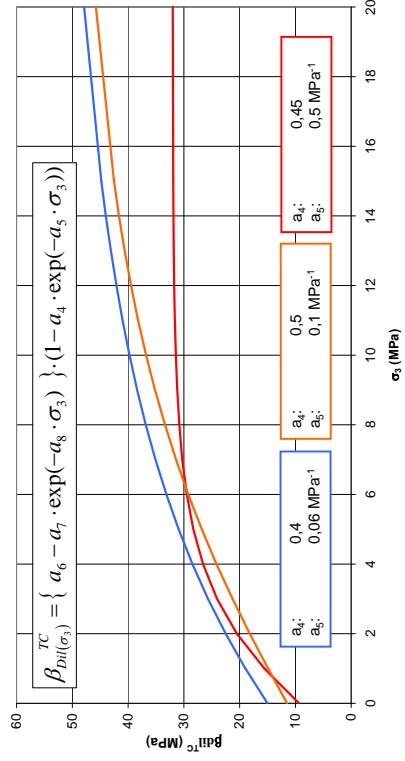

apl. Prof. Dr.-Ing. habil. U. Düsterlöh
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014
21

Dilation strength argillaceous salt WIPP

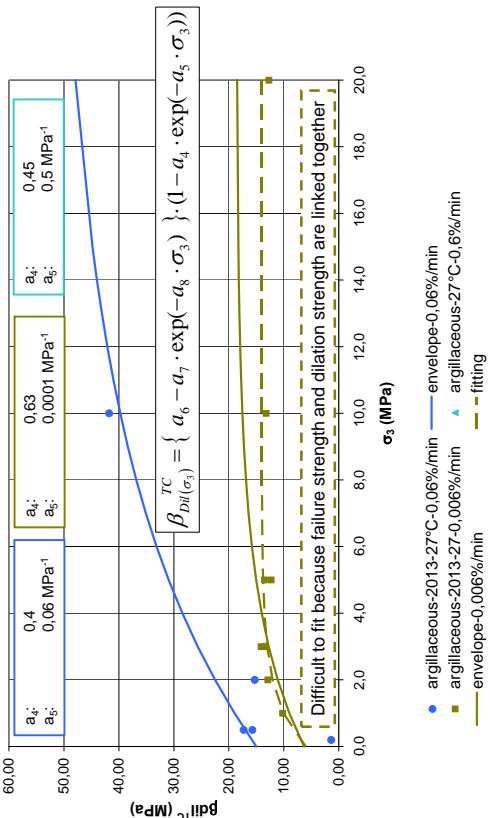

apl. Prof. Dr.-Ing. habil. U. Düsterlöh
Chair for Waste Disposal Technologies and Geomechanics


5th US/German Workshop – Santa Fe 2014
22

Laboratory program on argillaceous salt from WIPP to determine creep behaviour

σ_3 MPa	σ_{eq} MPa	T °C	load level	duration d	loading / unloading	dilation strength	planned	carried out	in progress
20	>10	27	-	2	60/60	L/U	3	6	-
20	>10	60	2	2	60/60	L/U	5	8	0
20	>10	80	2	2	60/60	L/U	2	2	0
20	<10	60	1	120	b/b	b	2	0	0
20	27/60/80	3	60/60/60	L/L/L	b/b/a	b	2	0	0
different	?	?	?	?	?	?	3	4	0
?	?	?	?	?	?	?	0	0	0
							$\Sigma = 20$	$\Sigma = 0$	$\Sigma = 0$


5th US/German Workshop – Santa Fe 2014
23

Creep tests argillaceous salt WIPP

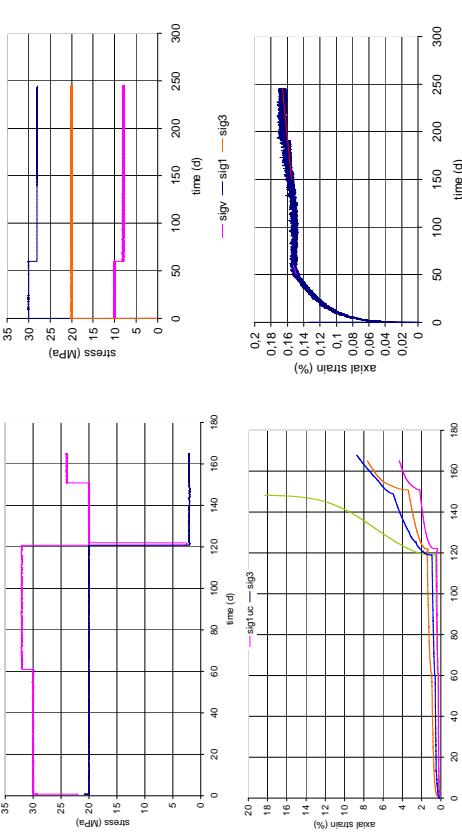

5th US/German Workshop – Santa Fe 2014
23


Laboratory program on argillaceous salt from WIPP to determine creep behaviour

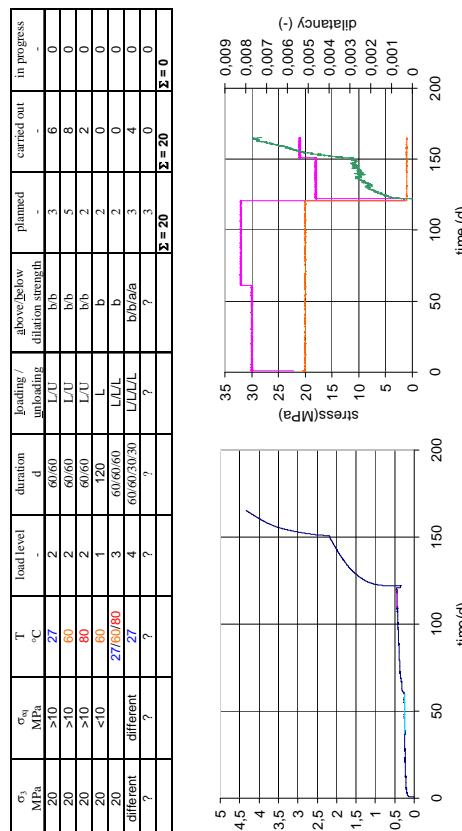

apl. Prof. Dr.-Ing. habil. U. Düsterlöh
Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014
24


Stationary creep parameter argillaceous salt WIPP

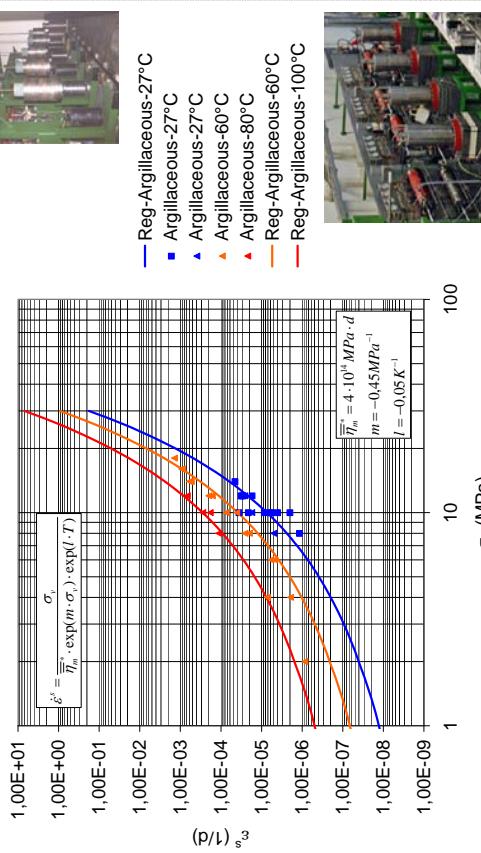

apl. Prof. Dr.-Ing. habil. U. Düslerich
 Chair for Waste Disposal Technologies and Geomechanics

5th US/German Workshop – Santa Fe 2014
 25

Transient creep parameter argillaceous salt WIPP

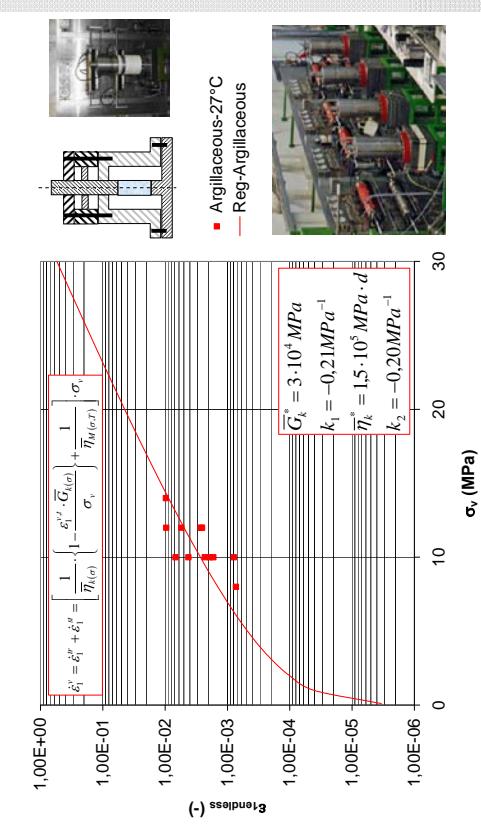

5th US/German Workshop – Santa Fe 2014
 26

Laboratory Tests on WIPP Salt

Clean Salt update

K. Salzer, D. Naumann, Rölke, C., R.-M. Günther, T. Popp
Institut für Gebirgsmechanik GmbH (IfG), 02479 Leipzig, Germany

In cooperation with U. Düsterloh, K. Herchen
*Lehrstuhl für Deponietechnik und Geomechanik, TU Clausthal, 38678
 Clausthal, Germany*

Abstract:

In the frame work of the Joint Project on the Comparison of Constitutive Models for the Thermo-Mechanical Behaviour of Rock Salt (Part 3) benchmark calculations are planned for the WIPP-site, simulating the in situ-tests performed in room D and B. Although a comprehensive mechanical data base for WIPP-salt already exists from investigations in the 80 - 90's, due to the development of existing and new material laws tailored test series facilitating the derivation of specific material parameters are missing. Thus a comprehensive investigation program on WIPP-salt has been executed. In the scope of work the tests are not only designed to derive material-law specific parameters but also to act itself as a base to perform benchmark calculations.

As a bedded salt repository, the idealized stratigraphy for the WIPP underground is composed of mainly argillaceous salt with a clean salt layer above the disposal room between Clay G and Clay I, anhydrite MB 139, and a thin anhydrite layer located in the clean salt layer, identified as anhydrite A. Thus, the main focus was on argillaceous salt and, subsequent, clean salt. As a representative material suite 60 12"-diameter cores ($\varnothing \approx 30.48$ cm, length: 0.6 m; weight: 90 kg) were sampled at the WIPP site, i.e. 5.5 t, and delivered to IfG in three shipments. The preparation of the cylindrical samples ($\varnothing = 100$ mm x $l = 200$ mm respectively 40 mm x 80 mm) is a special task of IfG.

Laboratory studies allow generic or site-specific salt properties (mechanical, thermal and transport) to be measured in a controlled environment of loading and material conditions. A specific request, therefore, is to conduct a suite of triaxial strength tests on intact salt comprising a triplet of triaxial strength test series (at $\sigma = 0.2, 0.5, 1.0, 2.0, 3.0, 5.0$ and 20 MPa) with a standard deformation rate of 10^{-5} 1/s at each of three temperatures: 27°C, 60°C, 100°C and, in addition, with two different deformation rates (10^{-4} 1/s, 10^{-6} 1/s) at 27°C, all with simultaneous measurements of dilatancy.

Fortunately in the long term the response of salt masses is governed by its steady state creep behaviour. Thus, in addition, a series of creep tests has been performed at loading conditions in the non-dilatant stress zone for a wide range of differential stresses. However, because in experiments the time necessary to reach true steady creep rates can last time periods of some few days to years, depending mainly on temperature, an innovative but simple creep testing approach is suggested. A series of multi-step tests with loading and unloading cycles allow a more reliable estimate of stationary creep rates in a reasonable time schedule.

Two index tests with permeability measurements with gas were performed indicating tightness of the salt ($k_{\text{Gas}} < 10^{-20} \text{ m}^2$) in the undisturbed state, as well, the capability of the rock for efficient crack closure after significant damage, i.e. a permeability decrease from 10^{-16} m^2 to $< 10^{-20} \text{ m}^2$ was observed within some few weeks at hydrostatic pressures of $\sigma = 20$ MPa.

109 strength and 37 creep tests were carried out in close cooperation between the rock mechanical labs of IfG and TUC. Most of lab tests on "clean salt" were carried out at IfG. The results will be presented in relation to data from "argillaceous salt", which were obtained at Clausthal University, IfG and additional test at the BGR and the Technical University of Braunschweig.

The outcome can be summarized as follows:

- The investigated "Wipp salt" is generally of excellent quality, i.e. undisturbed (intact) and largely homogeneous.
- The moisture contents of the "clean salt" (CS) are in the order of 0.15 wt. %, respectively, for the "argillaceous salt" (AS) in a data range: 0.2 - 0.4 - 1.0 wt. %. The measured humidity content is lower than average values from the literature. However, they are therefore generally higher than those of domal rock salt.
- The strength tests on "clean salt" are already completed. A very consistent set of data and parameters could be obtained:
 - Temperature-increase results in significant strength decrease
 - Referred to in situ deformation rates $<10^{-10}$ 1/s the strength will be reduced
 - The onset of dilatancy, i.e. described by the dilatancy boundary, is nearly independent from temperature and the deformation rates but shows significant data scattering.
 - The comparison with the present strength data for the Asse salt shows generally slightly lower strength values, but is overall in the known properties field of pure rock salt.
- The creep test on "clean salt" and mostly on "argillaceous salt" are now also finished:
 - Unique creep data sets of high quality were obtained for room temperature, 60°C and 80°C, applying the new creep test approach, both for CS and AS. However, differences to older data sets are obvious (SAND92-7291), especially at higher temperature. This may be due to the higher water content of the tested salt specimens.
 - AS creeps slightly faster (2x) than CS, but both show slightly higher creep rates as they have been identified for Asse salt
 - At stresses < 10 MPa the creep behavior deviates from a simple power law relationship which may be referred to a mechanism change from dislocation creep to additional effects of fluid-assisted creep.
- Gas tightness of the WIPP-salt is demonstrated, as well its efficient sealing capability.

With these investigations, a comprehensive data fundus for the WIPP-salt has been set which allows an extrapolation to the expected underground conditions and to carry out the planned benchmark calculations for room D and B.

Laboratory Tests on WIPP-Salt (Clean salt)


K. Salzer, D. Naumann,
R. - M. Günther, C. Roelke & T. Popp
Institut für Gebirgsmechanik GmbH,
Leipzig, Germany



- Petrophysical characterisation
- Strength and dilatancy testing
- Creep tests
 - Confining pressure
 - Deformation rate
 - Temperature
- Permeability-testing
 - Creep test procedures
 - Results
- Summary


Institut für Gebirgsmechanik GmbH Leipzig
 Research • Testing • Consulting • Executive
 Consulting Services

Water content - drying 24 h 105°C

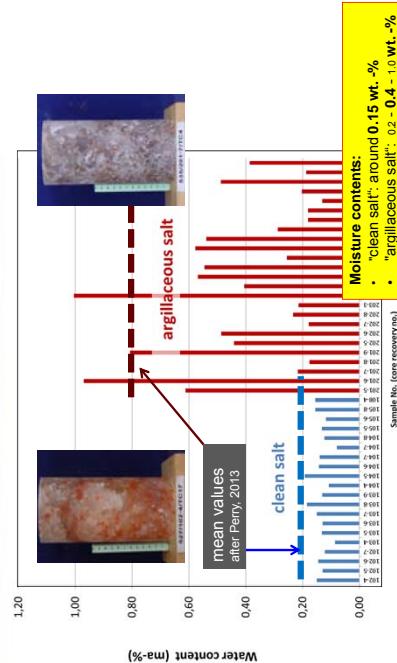


8





Petro-physical characterization




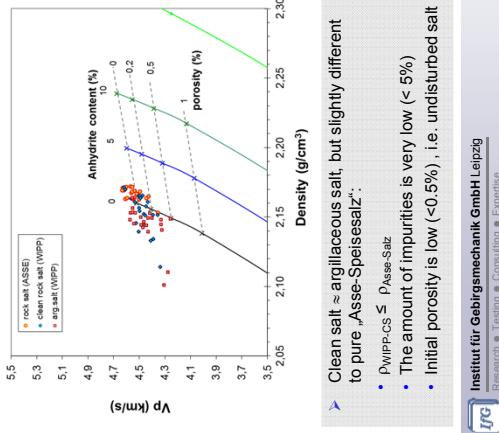






Triaxial strength / onset of dilatancy


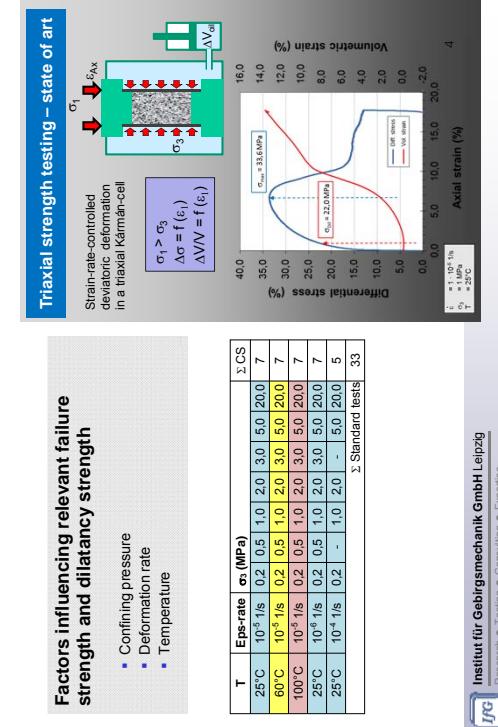


Institut für Getriebsmechanik GmbH Leipzig
 Research • Testing • Consulting • Expertise

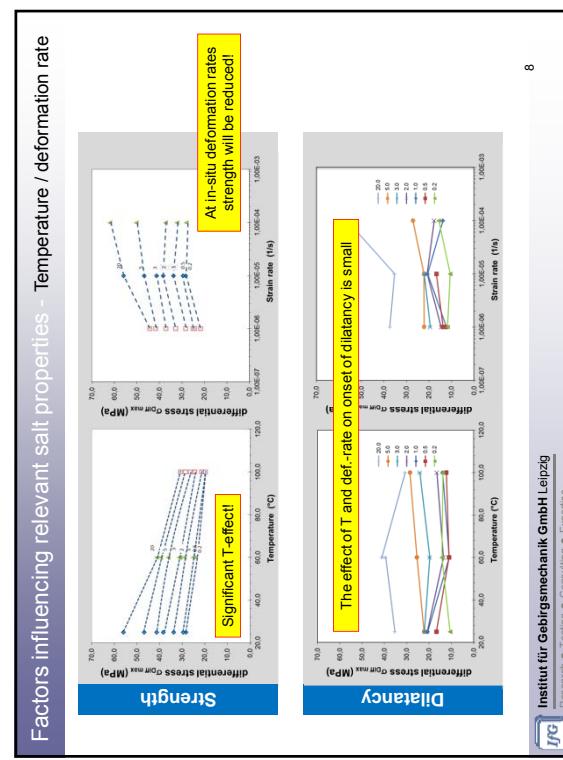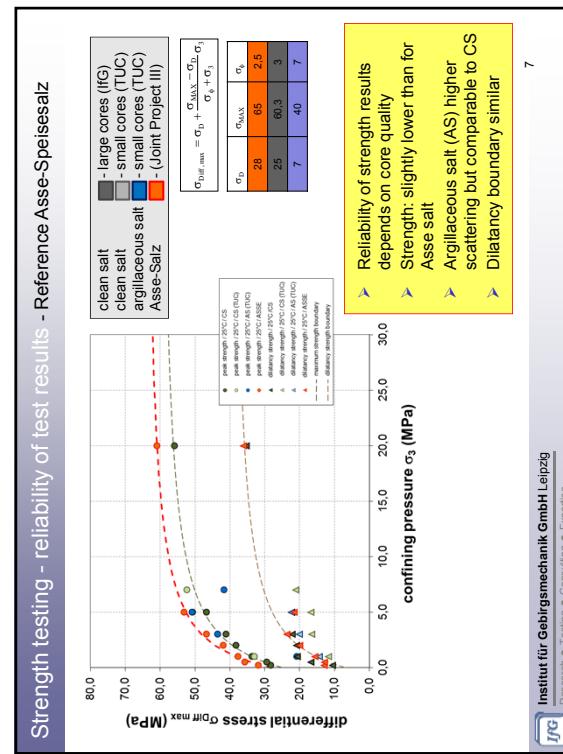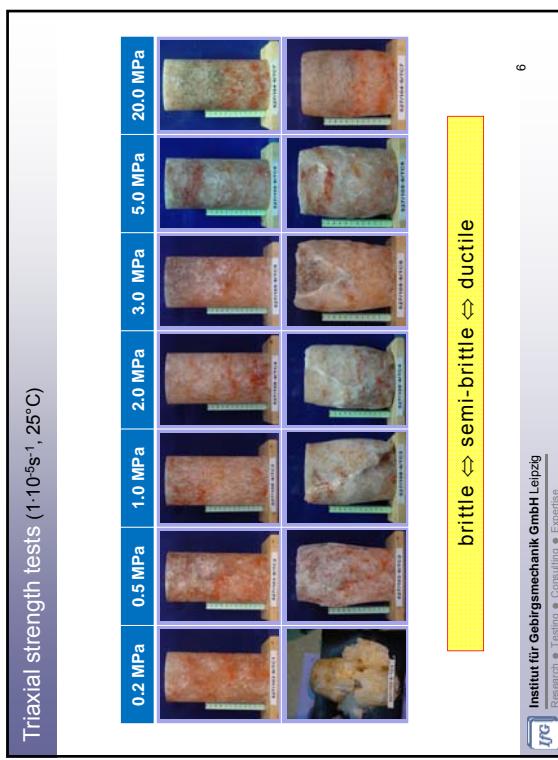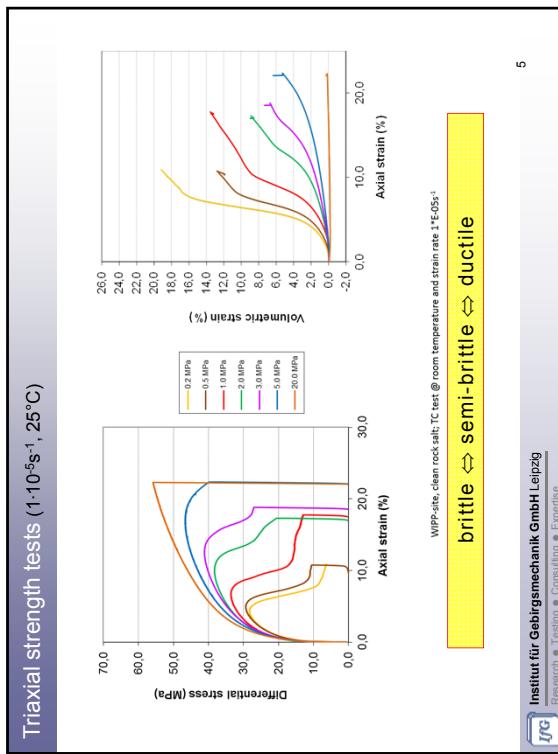

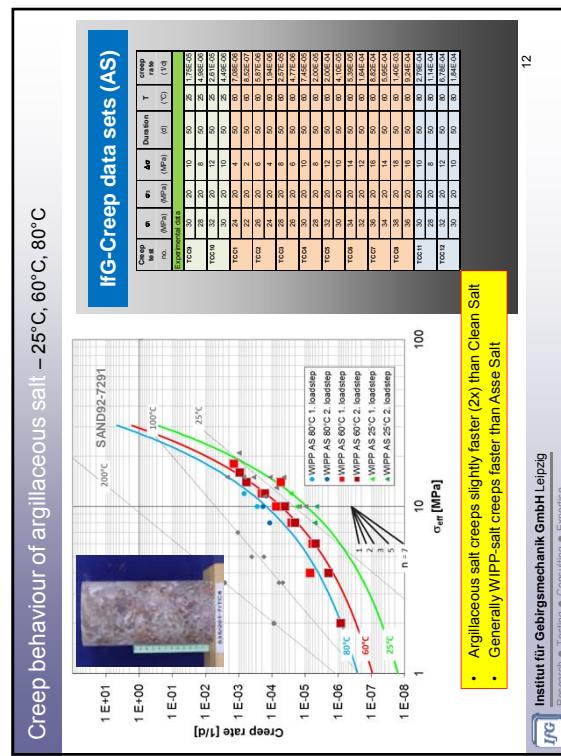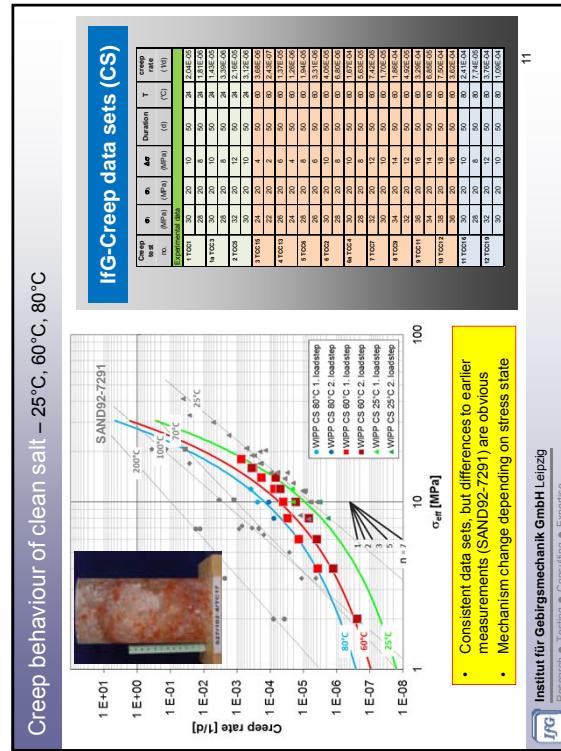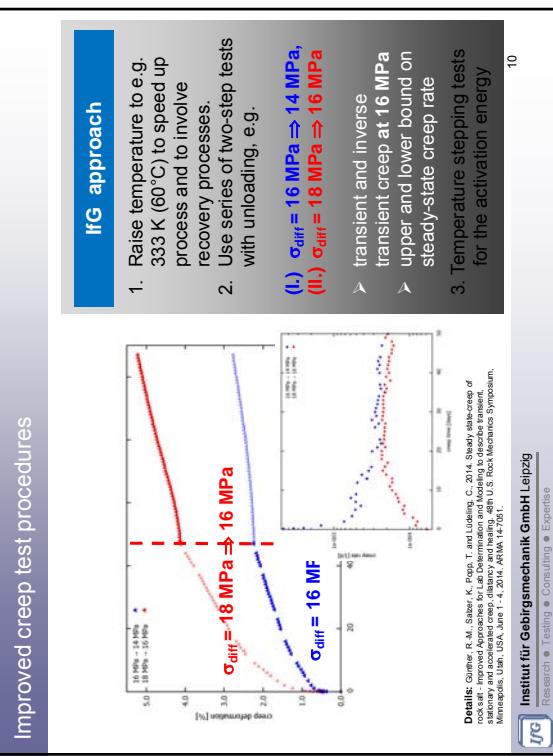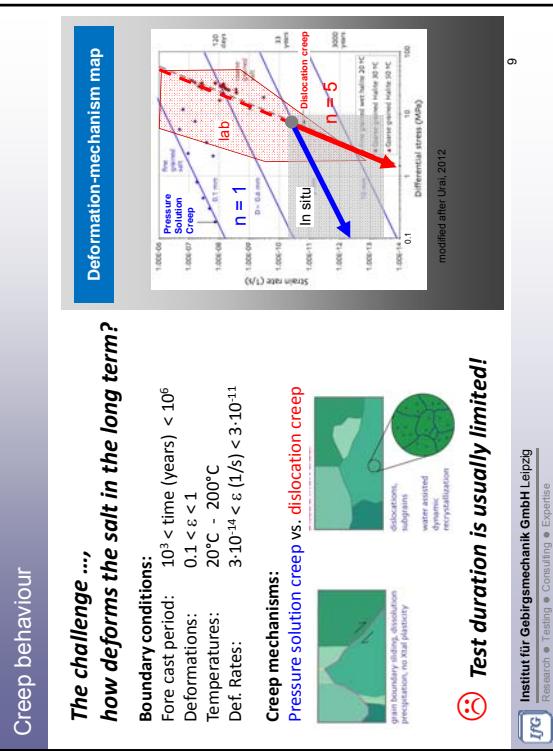

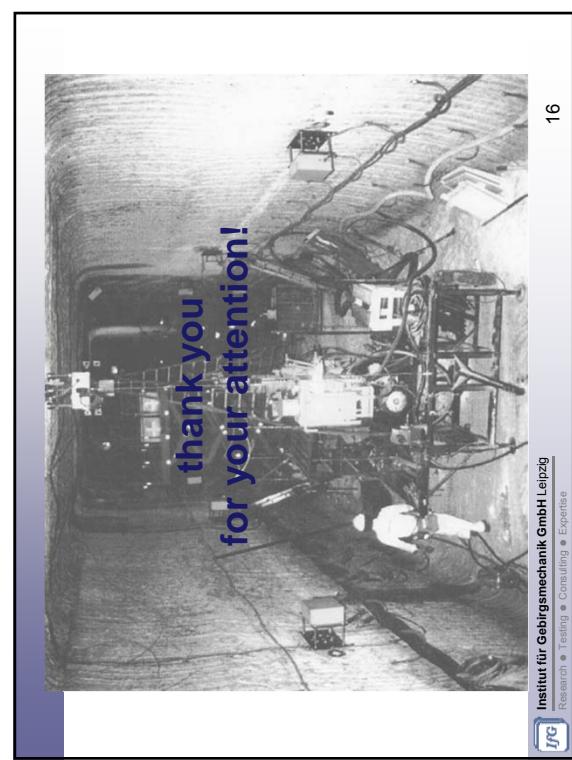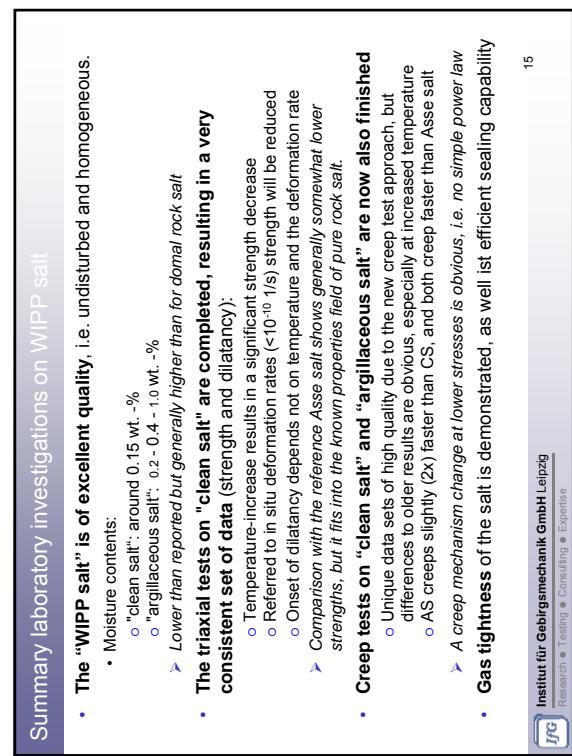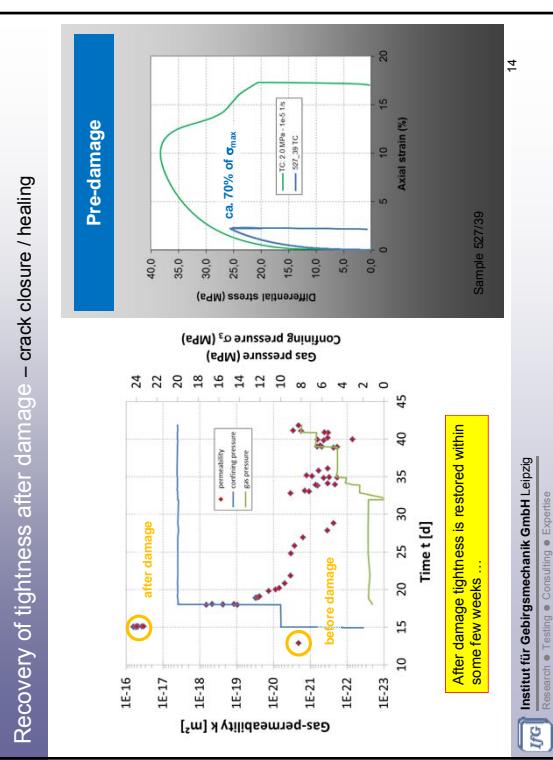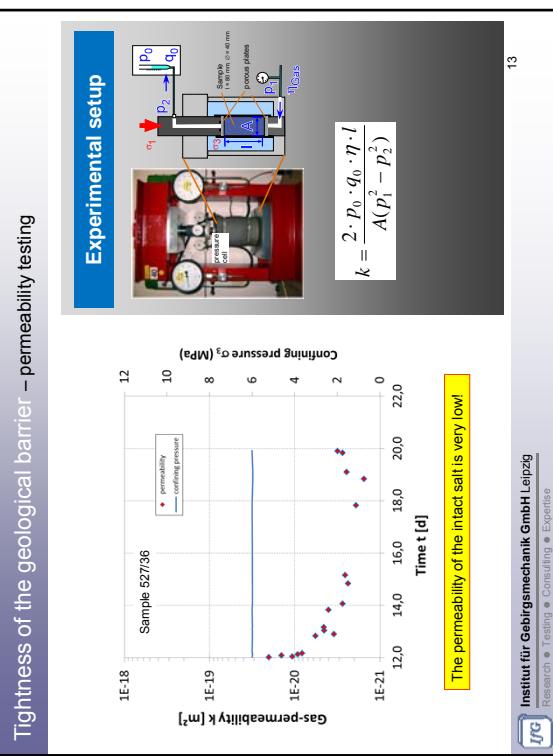

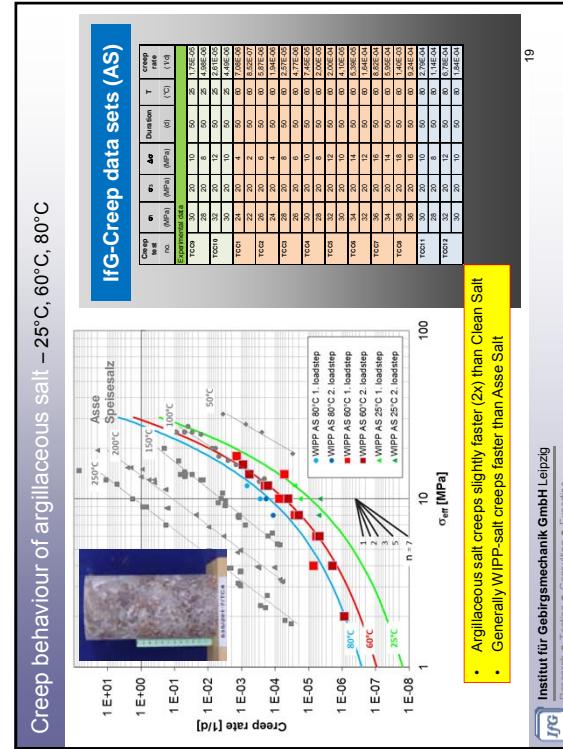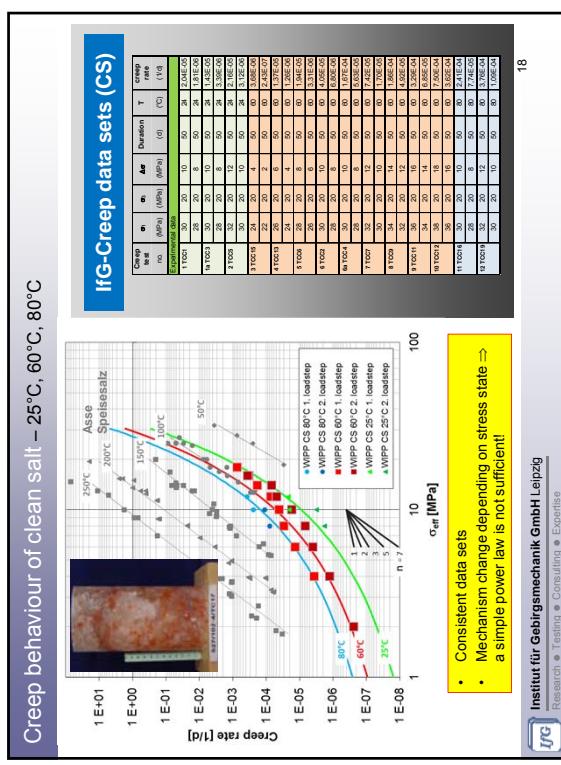

Complementary laboratory tests on WIPP salt at normal and higher temperatures

Ingo Plischke

Abstract

It has been confirmed that differences in mineralogy, microstructure, cristallography and water content have an influence on long term deformation behaviour of rocksalt. Therefore two different facies types (clean and argillaceous salt) of WIPP rocksalt were and will be tested on its creep behavior. Hence 16 creep tests were carried out during the last year on rocksalt from the WIPP site of which 9 tests were uniaxial tests at normal temperature (22°C) and 7 tests were conducted at higher temperatures of up to 140°C , thereof two under triaxial conditions. In addition, two tests on the same facies types were already carried out in 2001 in the rock mechanic laboratory of BGR. All test contained a change of temperature or stress. The test series is not finished and will still be ongoing until 2015, to be completed by more triaxial and uniaxial creep tests at higher temperatures. The results will then be compared with results from creep tests of flat bedded rocksalt from the northern German basin, which runs in the past in the rock mechanic laboratory of BGR.

A comparison of the first existing results from WIPP rocksalt with flat bedded rocksalt from the northern German basin offers no greater deviation in creep behaviour. However, the database is still small due to the time-based length of the creep tests at BGR.

Exceptional service in the national interest

Sandia National Laboratories

September 2014

Laboratory Tests at higher Temperature on different Facies types of WIPP Salt

DBE TEC

INTERNAZIONALI

US/GERMAN WORKSHOP

Salt Repository Research, Design, & Operation

Santo, N.M.

Sandia National Laboratories

Project Management Agency, Karlsruhe

PTKA

ENERGY

NASA

13085_v_V_A-000001.JPG

File 13085 clean salt

File 13079 arg. salt

File 14008 arg. salt

13084 clean salt

3

BGR

Laboratory Tests at higher Temperature on different facies types of WIPP Salt

- Aim of the investigations
 - complementation of the tests of other companions
 - Creep tests at higher temperature on different facies types
 - Overview of the test program
 - Results
 - Current and future works
 - Petrophysical investigations
 - Mineralogy
 - Future works

2

BGR

Laboratory Tests at higher Temperature on different facies types of WIPP Salt

- Clean salt (mineralogy)
 - Water content $\approx 2.5 \text{ w.-\%}$ (after Rietveld)!!
- Mineralogy (after Rietveld)

Probe	Halt	Polyhalit	Anhydrit	Kieserit	Gz/lit/Mag.
2.01	99	0.5			0.5
2.29	99	0.7			0.5
102-5 rot	96	3	≤ 1	≤ 1	
102-5 grau	99			≤ 1	
104 rot	99	≤ 1			
104 grau	100				
105-5 rot	99		1		
105-5 grau	99	≤ 1	≤ 1		

4

BGR

Laboratory Tests at higher Temperature on different facies types of WIPP Salt

- Analyzed Material

13085_v_V_A-000001.JPG

File 13085 clean salt

File 13079 arg. salt



File 14008 arg. salt



File 13084 clean salt

3



4

BGR

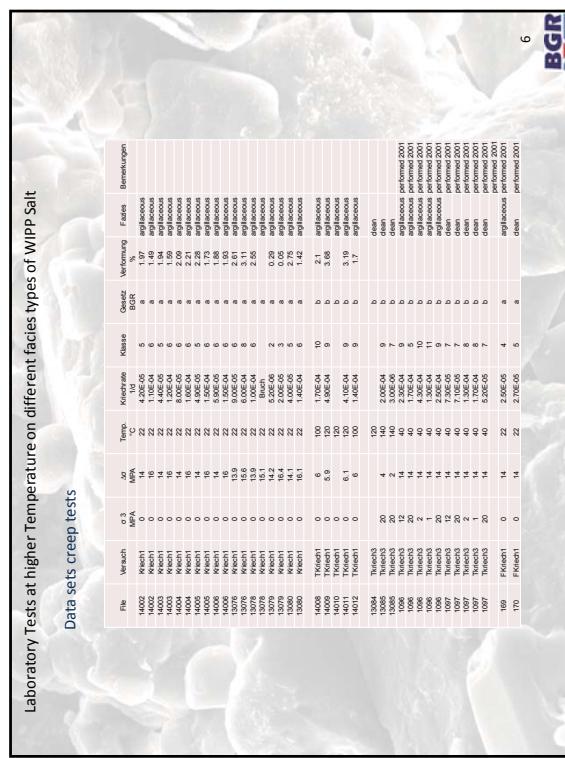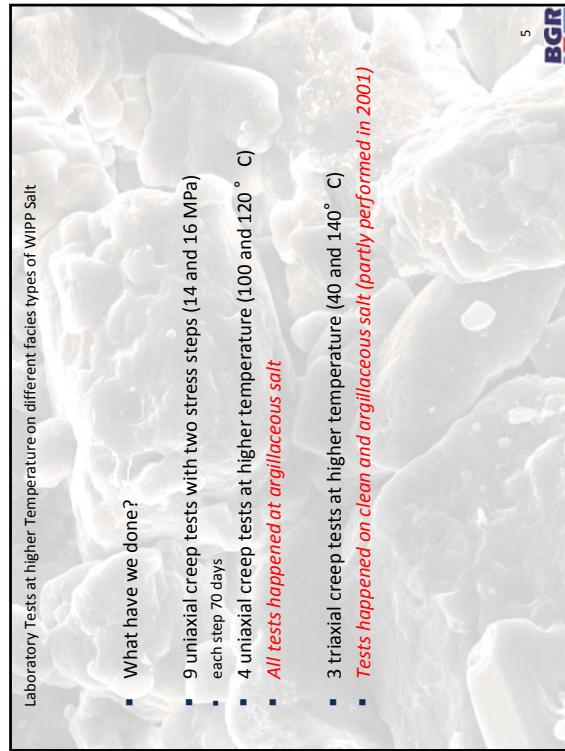

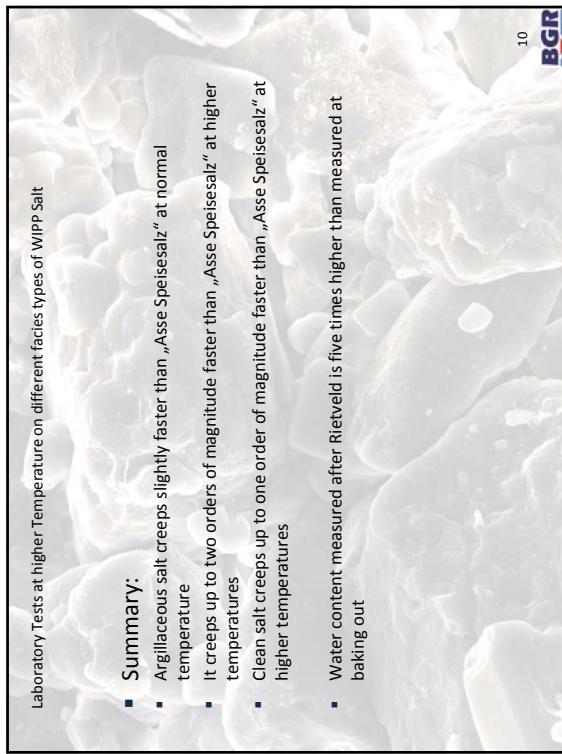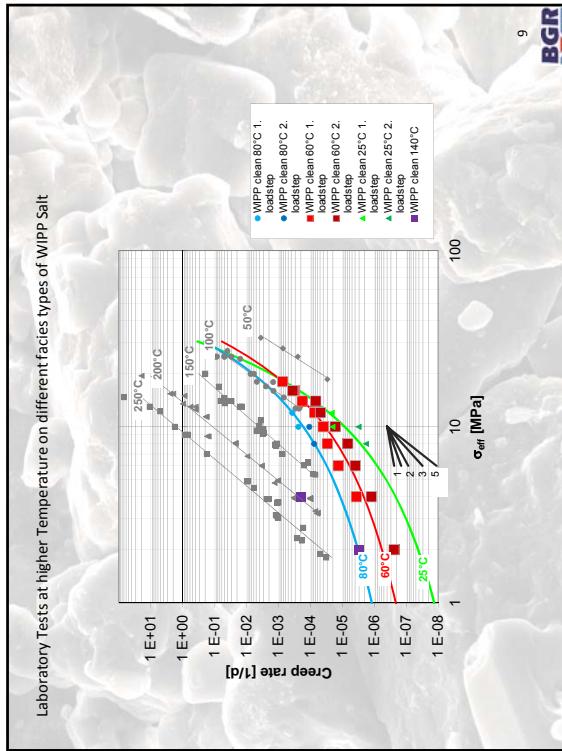

- Summary:
- Argillaceous salt creeps slightly faster than „Asse Speisesalz“ at normal temperature
- It creeps up to two orders of magnitude faster than „Asse Speisesalz“ at higher temperatures
- Clean salt creeps up to one order of magnitude faster than „Asse Speisesalz“ at higher temperatures
- Water content measured after Rietveld is five times higher than measured at baking out

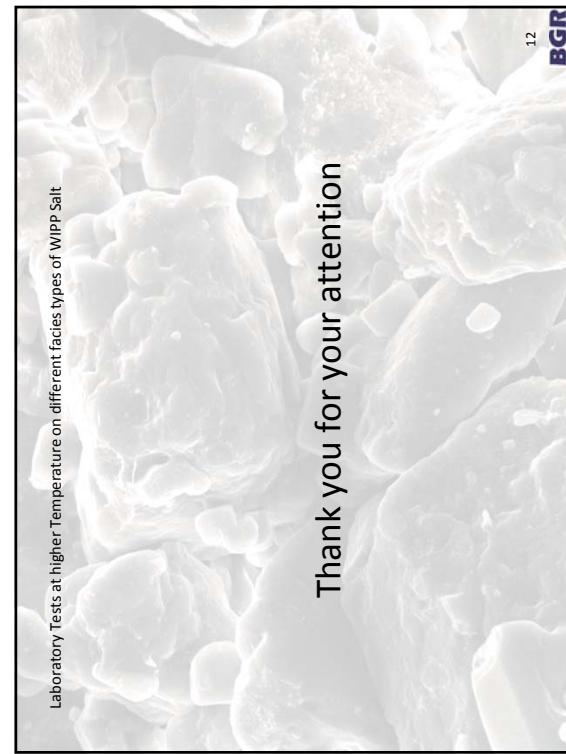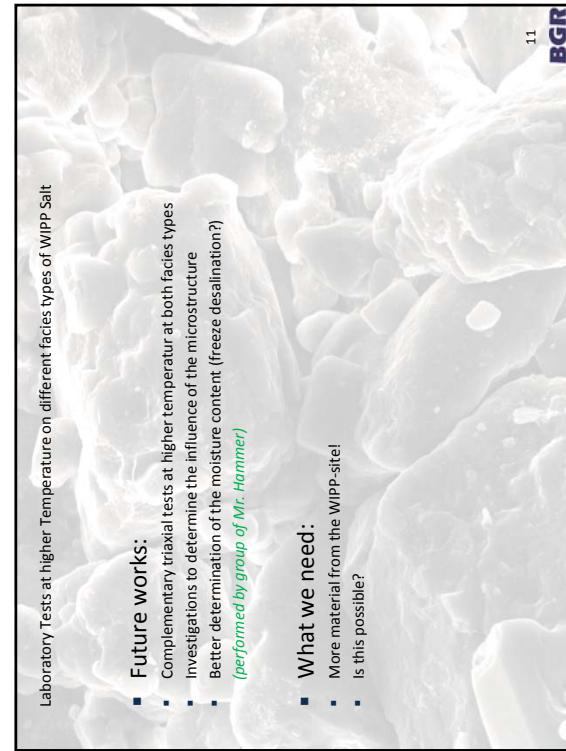

Thank you for your attention

- Future works:
 - Complementary triaxial tests at higher temperature at both facies types
 - Investigations to determine the influence of the microstructure
 - Better determination of the moisture content (freeze desalination?)
(Performed by group of Mr. Hammer)
- What we need:
 - More material from the WIPP-site!
 - Is this possible?

Petrography, fluid distribution, geochemistry and microstructures of halite rocks from WIPP-Site (and Gorleben)

Maximilian Pusch¹, Jörg Hammer¹, Christian Ostertag-Henning¹

¹ Federal Institute for Geosciences and Natural Resources (BGR), Stilleweg 2, 30655 Hannover, Germany

In view of expected differences according to petrography, fluid distribution, geochemistry and microstructures of halite rocks from flat bedding salt formations (WIPP; USA) and salt domes (Gorleben, Germany), several salt samples from WIPP have been analyzed at BGR Hannover, Germany.

WIPP drilling SNLCV302 which contains Marker Bed 139 (MB139) at 2.46 ft - 6.15 ft was used for thin sections and geochemical studies in order to analyze an exemplary profile crossing a salt cycle in North American Permian Salt Basin (Delaware-Basin). The results were compared with the data we gained from Gorleben exploration mine. For studies of hydrocarbon distribution and origin samples from drillings QGU 12, 14, 36, 38 and 39 were used.

The microscopic analyzes of the samples show distinct differences between salt rocks from WIPP and Gorleben. The halitic matrix at the bottom of MB139 (top of the previous salt cycle) is dominated by numerous inclusions of columnar, idiomorphic crystals of polyhalite. In addition intercalations of idiomorphic, columnar anhydrite as well as accessory idiomorphic, columnar crystal of celestine and intersections of clay are visible at the grain boundaries of halite crystals. At the base of MB139 we have an 0,59" thin layer of clay followed by vertical orientated anhydrite with intersections of halite and clay streaks up to 5' 9.09". Until 4.9 ft the cores are dominated by layers of lenticular spiked aggregates and idiomorphic columnar crystals of polyhalite within an anhydritic matrix changing with layers of matted lenticular aggregates of polyhalite with magnesite at the boundaries of the aggregates. Both shapes show intersections of halite-filled pores with large, idiomorphic anhydrite crystals. In the upper part of MB139 up to 2.46 ft anhydrite crystals dominate the rock (sometime with pseudomorphic relics of former gypsum crystals) intersecting with halite and occasionally polyhalite, magnesite or clay. Typical are idiomorphic crystals of celestine all over the anhydritic zone. The halite in the top of MB139 is dominated by halite with intersected cluster of polyhalite. Noticeable are macroscopical visible fluid inclusions up to 0.2" containing brine, brine and gas or brine and crystals of polyhalite, anhydrite or sometimes clay. The content of hydrocarbons within samples from drillings QGU 12, 14, 36, 38 and 39 ranges between 0.2 and 2.4 mg/kg [C₁₀-C₄₀] with a maximum of 4.1 mg/kg [C₁₀-C₄₀]. The concentration of short-chained hydrocarbons (<C₁₀) is below detection limit. In comparison, samples from Gorleben exploration mine (crosscut 1 west and 1 east) have an larger range of dispersion with an

hydrocarbon content between 0.006 and 6.88 mg/kg [C₁-C₄₀] and 11 samples with > 6.881mg/kg [C₁₀-C₄₀] up to a maximum of 442 mg/kg [C₁₀-C₄₀].

However, the rock salt from Gorleben salt dome shows a nearly homogeneous texture. It consists of halite with clews of anhydrite and accessory crystals of carbonate and sometimes pyrite, celestine or authigenic quartz.

Petrography, fluid distribution, geochemistry and microstructures of halite rocks from WIPP-Site (and Gorleben)


Maximilian Pusch, Jörg Hammer, Christian Ostertag-Henning



5th US/German Workshop on Salt Repository Research, Design, and Operation
September 7 – 11, 2014 | Santa Fe, New Mexico


BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

Permian salt formations of WIPP (flat bedding; Delaware basin) & Gorleben (salt dome; North German basin) in comparison

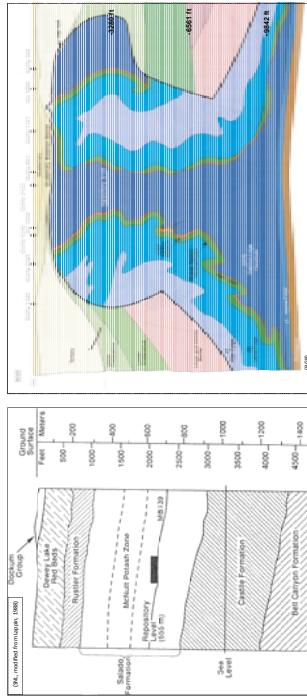

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

Location of WIPP (Delaware basin) & Gorleben (North German basin)

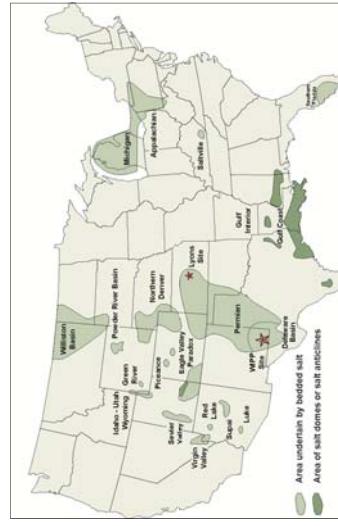


BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

Permian salt formations of WIPP (flat bedding; Delaware basin) & Gorleben (salt dome; North German basin) in comparison


Comparison of halite rocks from flat bedding vs. salt dome

- petrography, mineralogical composition and microstructures
- moisture, composition and distribution of fluids
- concentration and composition of hydrocarbons within the host rocks
- differences in geochemical composition

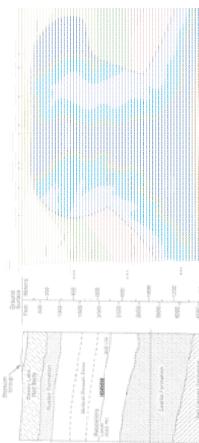

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER


Location of WIPP (Delaware basin) & Gorleben (North German basin)

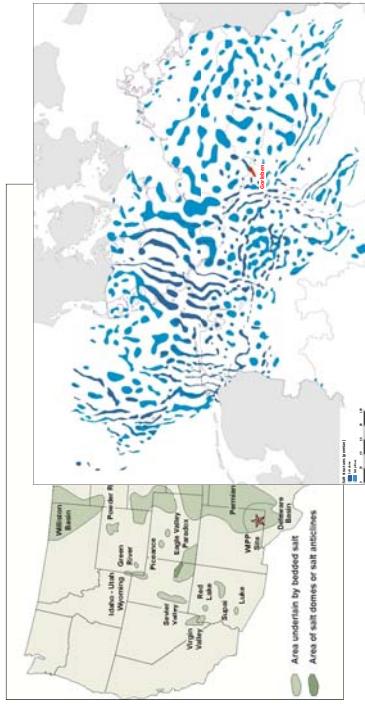

Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER


Location of WIPP (Delaware basin) & Gorleben (North German basin)

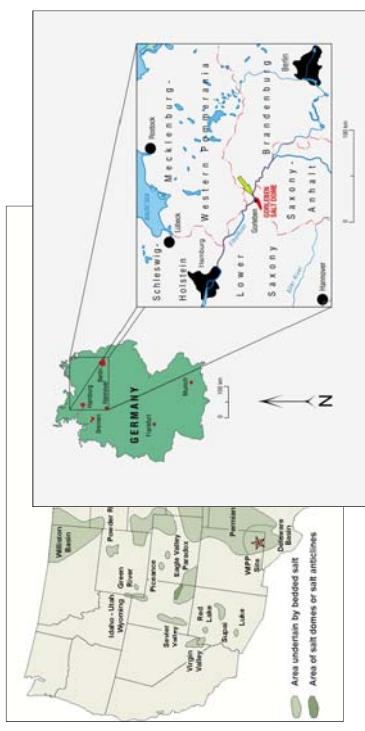

Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER


Drill core segments used for sampling of WIPP salt

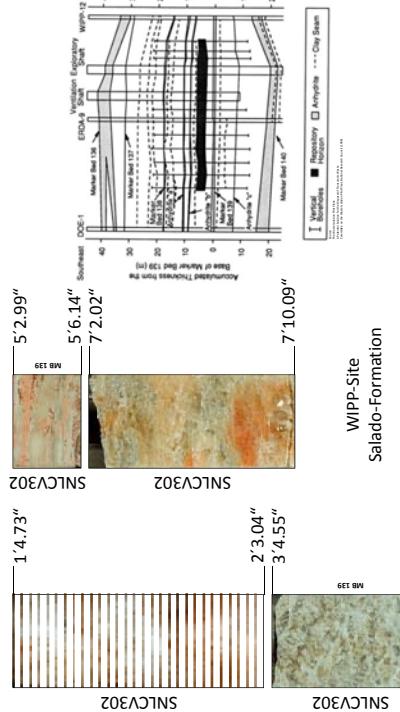


Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER


Bisected drill core showpieces of Zechstein z2 and z3 from Gorleben

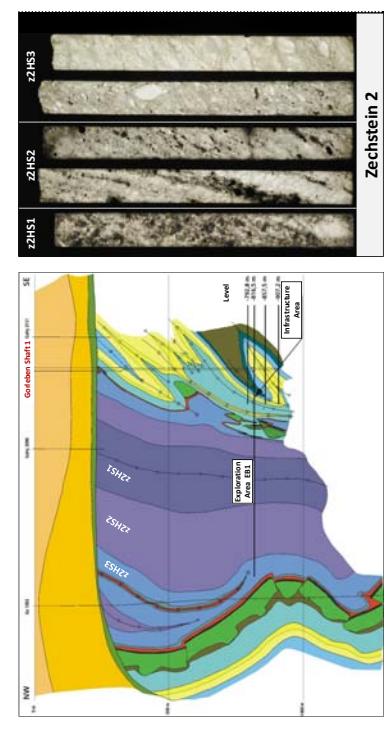


BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

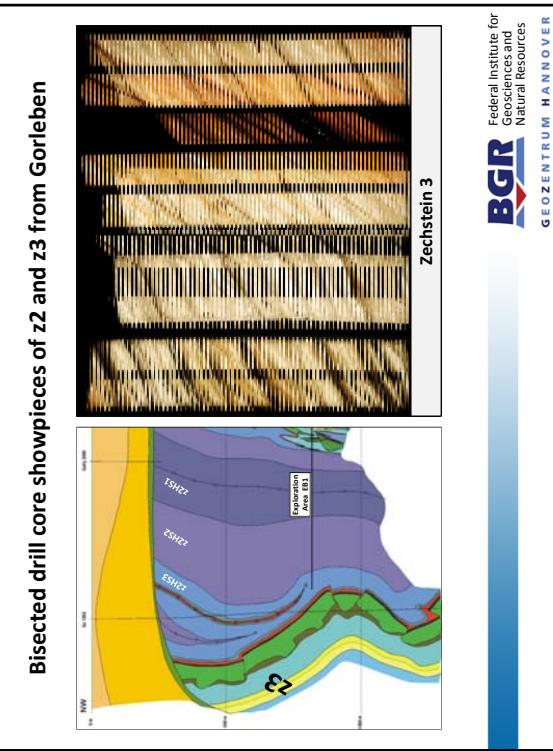

Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

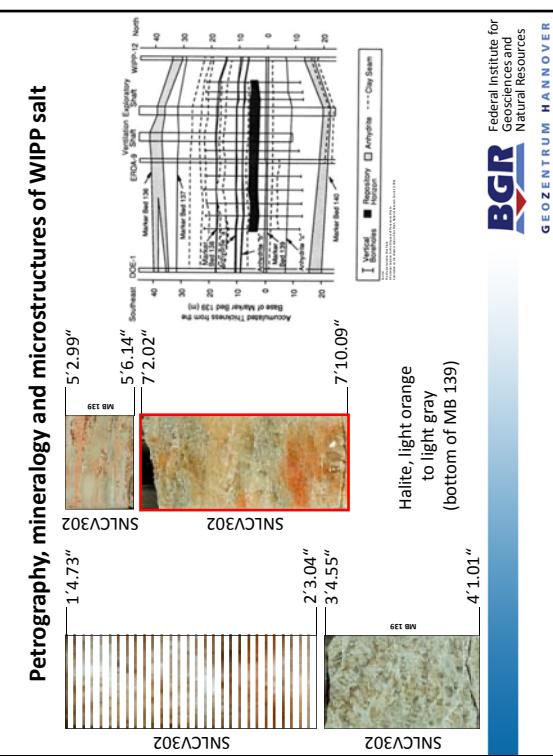

BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

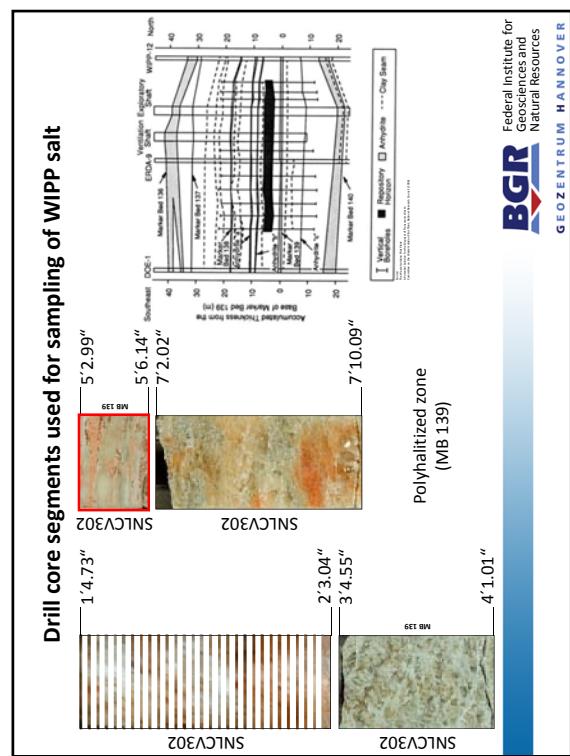


BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER




BGR
Federal Institute for
Geosciences and
Natural Resources
GEOZENTRUM HANNOVER

Drill core segments used for sampling of WIPP salt

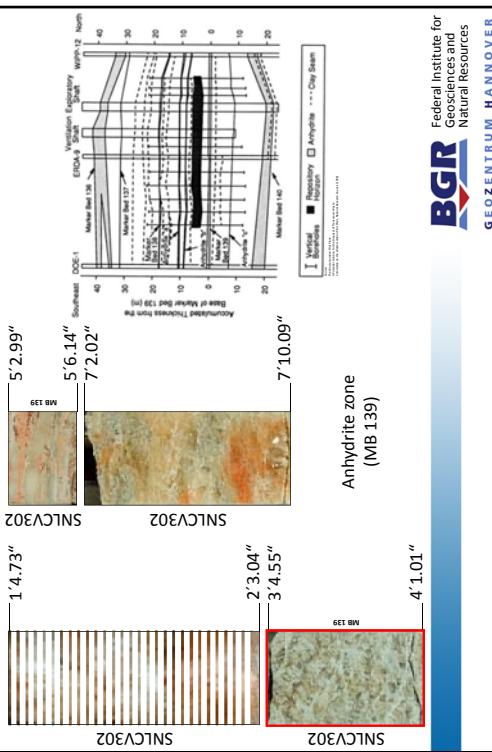


Characteristics of Polyhalite zone (MB 139)

Thin sections from depth 5'2.99" to 5'9.09"

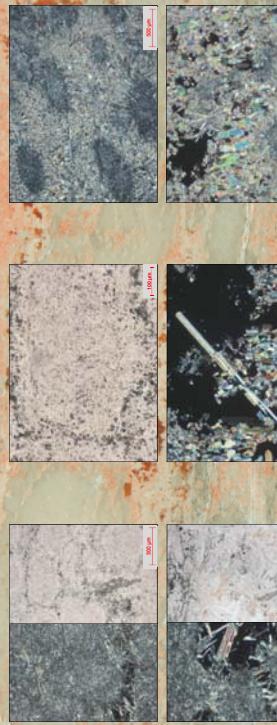


BGR Federal Institute for
Geosciences and
Natural Resources
GEOPOLZENTRUM HANNOVER

Drill core segments used for sampling of WIPP salt




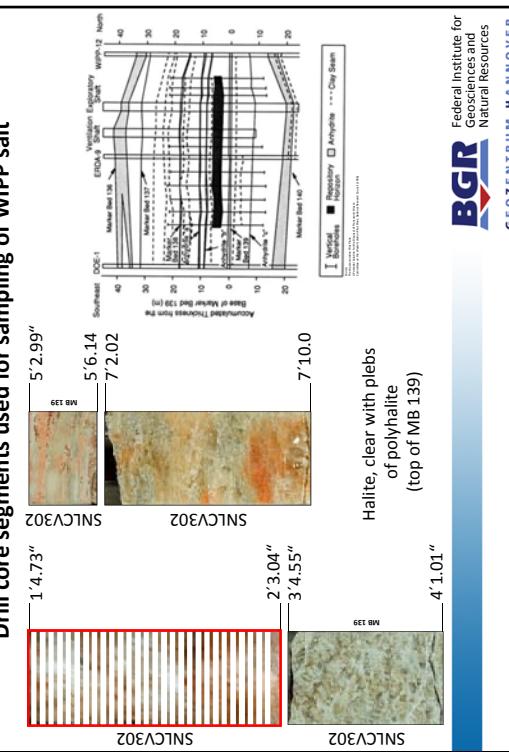






Characteristics of Anhydrite zone (MB 139)



Thin sections from depth 1'9 26" to 1'5 91"

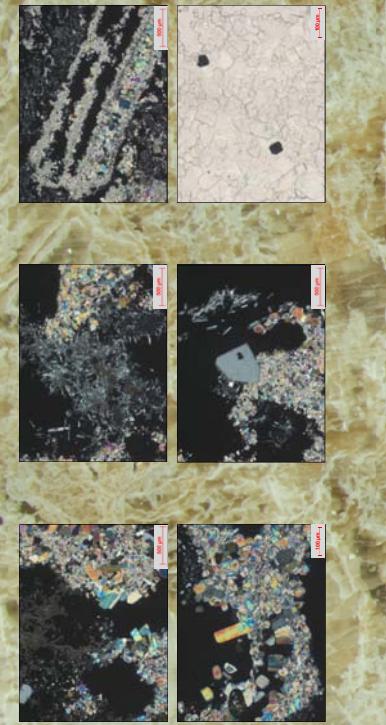

BGI Geosciences and Natural Resources GEOZENTRUM HANNOVER

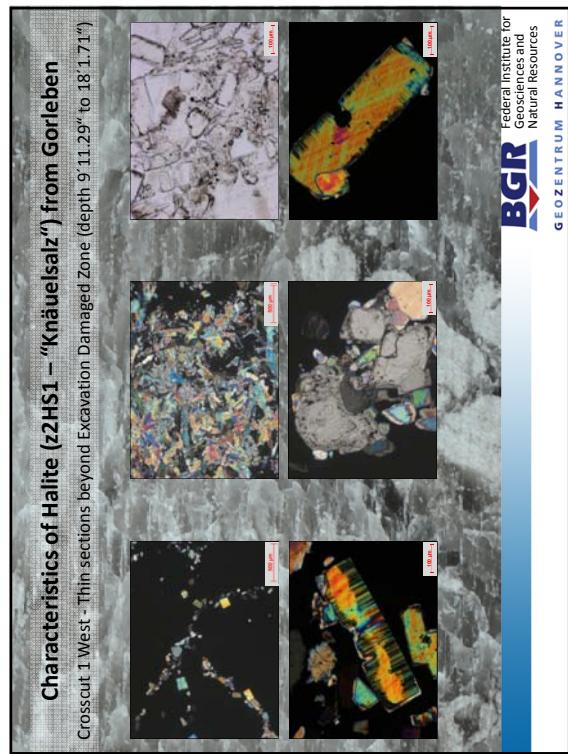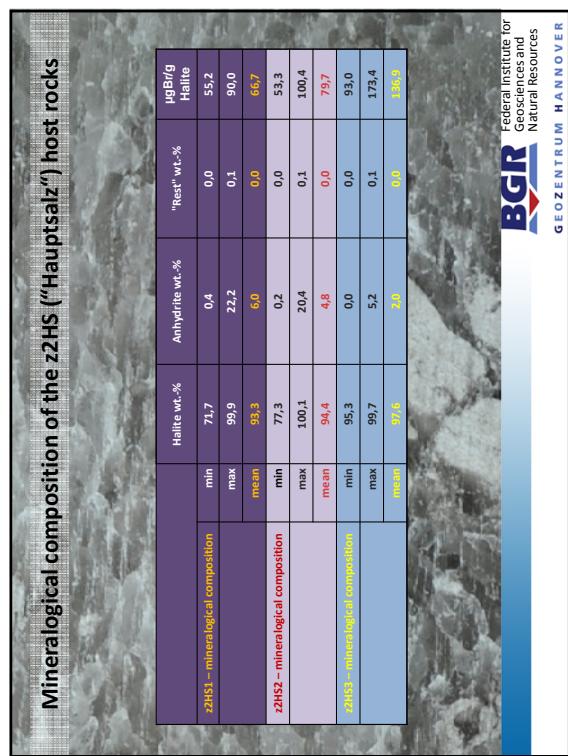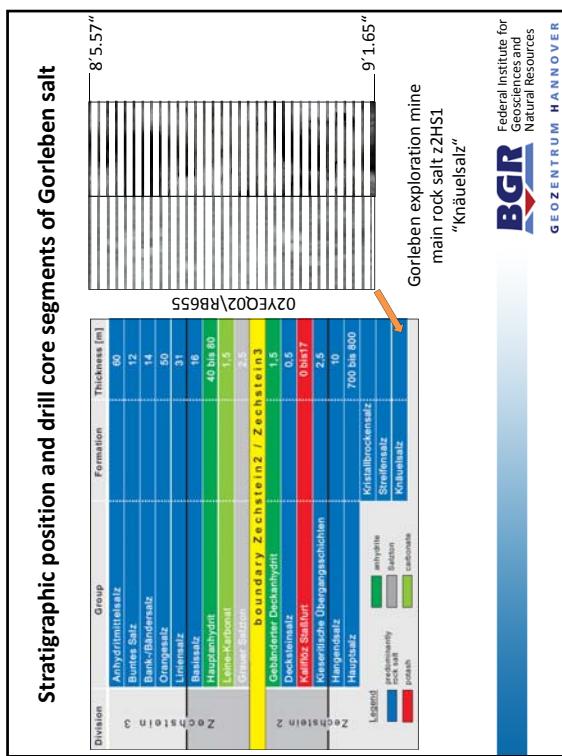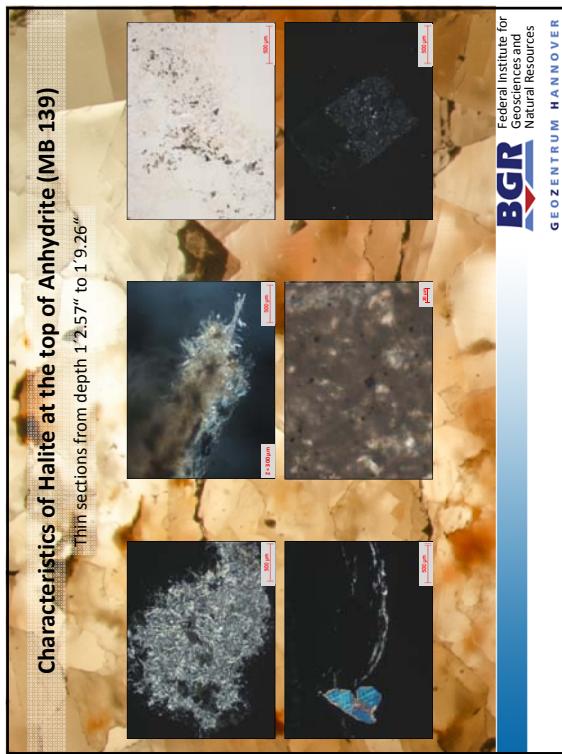

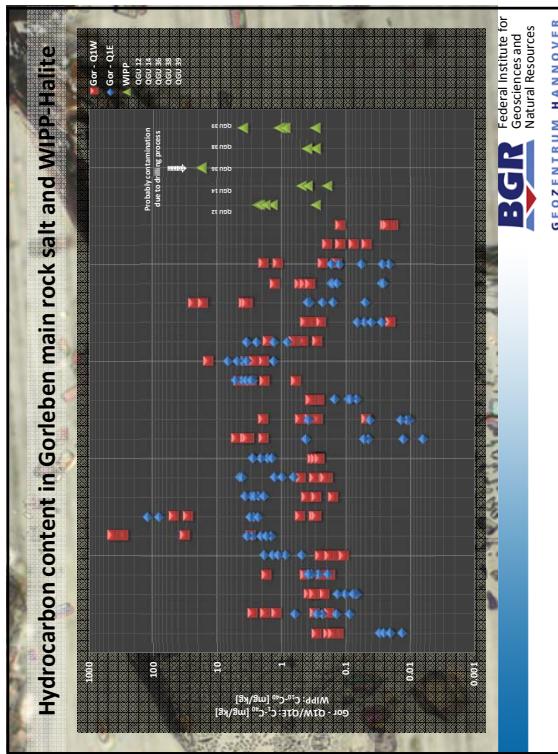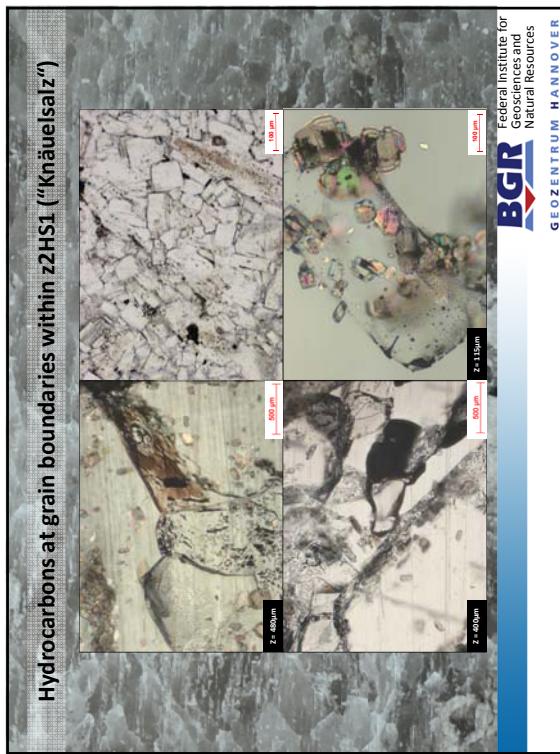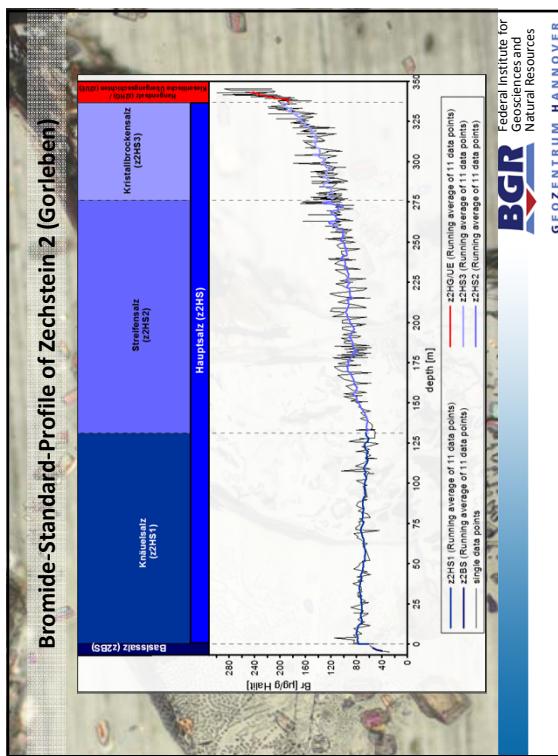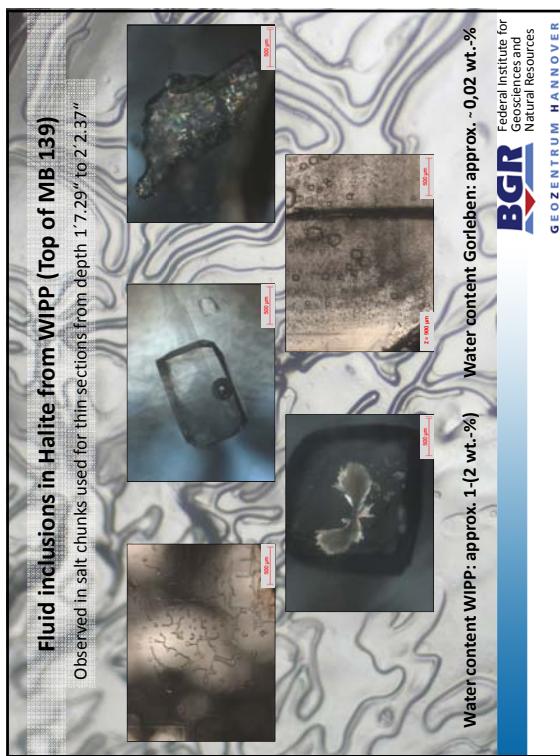

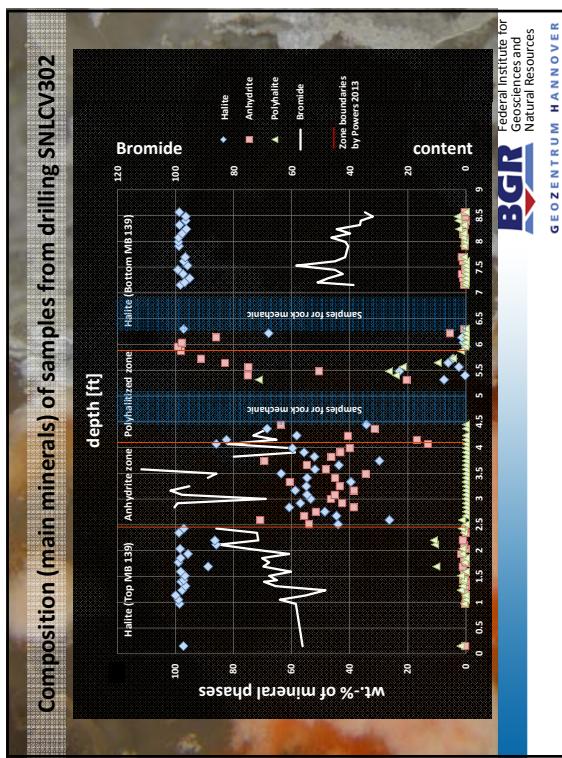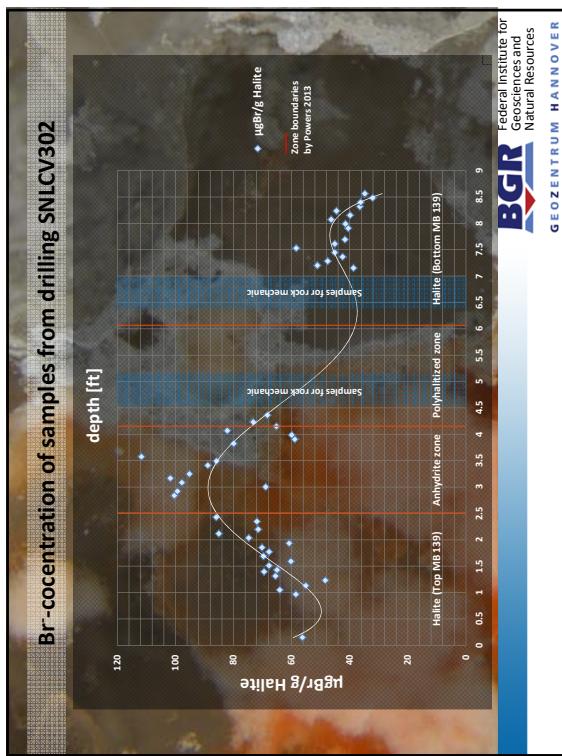

Exceptional service in the national interest

Sandia National Laboratories

September 2014

INTERNATIONAL
US/German Workshop
Salt Repository Research,
Design, & Operation
Santo, NM

Shaft seal systems of VSG

Nina Müller-Hoeppé
DBE TECHNOLOGY GmbH
Eschenstraße 55, D-31224 Peine/Germany

Sandia National Laboratories
DBE TECHNOLOGY GmbH
PTKA
ENERGY
NASA

Project Management Agency Karlsruhe
Karlsruhe Institute of Technology

Joint National Laboratory in salt repository research and operation by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation, the U.S. Department of Energy National Nuclear Security Administration, and the German Federal Ministry of Education and Research.

Copyright © 2014, the U.S. Department of Energy National Nuclear Security Administration and Sandia Corporation. All rights reserved.

Outline

- Status at US-German Workshops 2010 & 2011
- Technical design procedure
- Selected steps of design procedure
- Results
- Conclusions & outlook

Müller-Hoeppé 09/2014

2

DBE TEC
DBE TECHNOLOGY GmbH

Status at US-German Workshops 2010 & 2011

- Decision to use European Standards in civil engineering (Eurocode) as design basis for the VSG sealing system on a trial basis
 - to derive and apply appropriate technical specifications and procedures
 - to link "long-term SA" and the proof of safety function of sealing systems
 - to assess the consequences of different working lives for sealing systems required in "long-term SA" and Eurocode by decoupling actions and resistances in "short-term" and "long-term" processes as a first approach
- As a result, corrosion due to geochemical conditions was identified as a "long-term" acting process on sealing systems causing degradation that is not sufficiently covered by Eurocode

Müller-Hoeppé 09/2014

3

DBE TEC
DBE TECHNOLOGY GmbH


Status at US-German Workshops 2010 & 2011

- The conceptual VSG sealing system (shaft & drift seals) is based on prototypes
 - availability of data for technical specifications (minimize expert judgment)
 - constructability is guaranteed (proof of constructability)
- The sealing system is constructible and the proof of safety function shows a high degree of reliability
- But as a draft not yet optimized





Müller-Hoeppé 09/2014





4

DBE TEC
DBE TECHNOLOGY GmbH

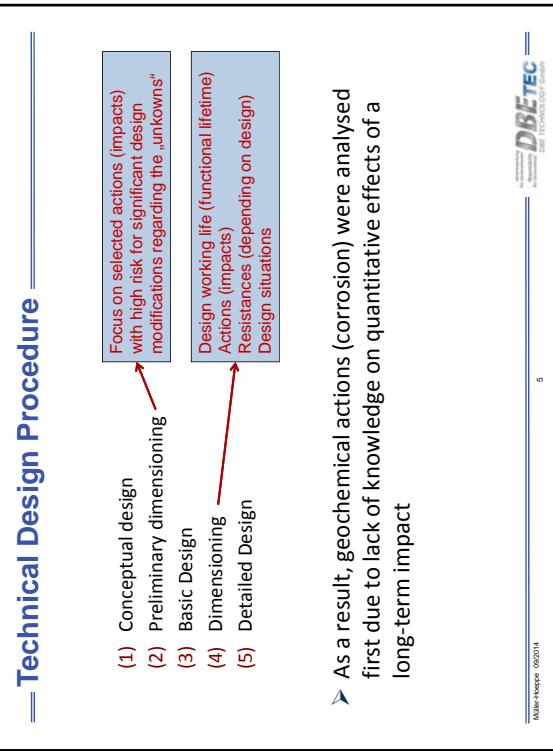

As a result, geochemical actions (corrosion) were analysed first due to lack of knowledge on quantitative effects of a long-term impact

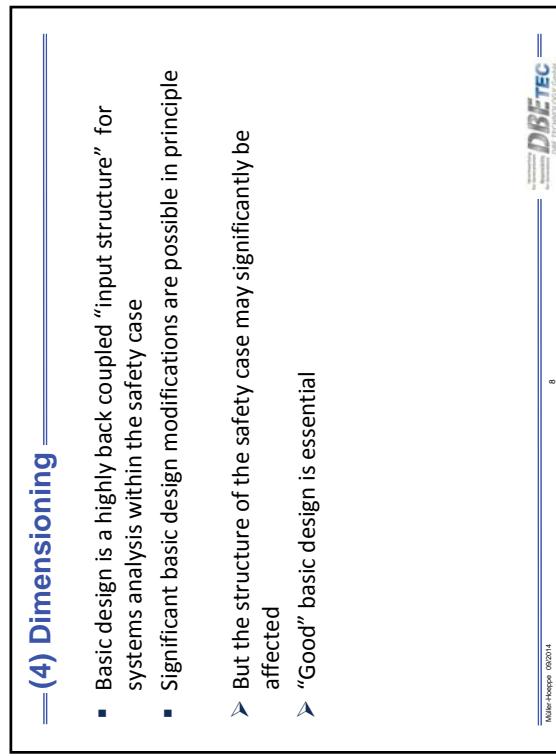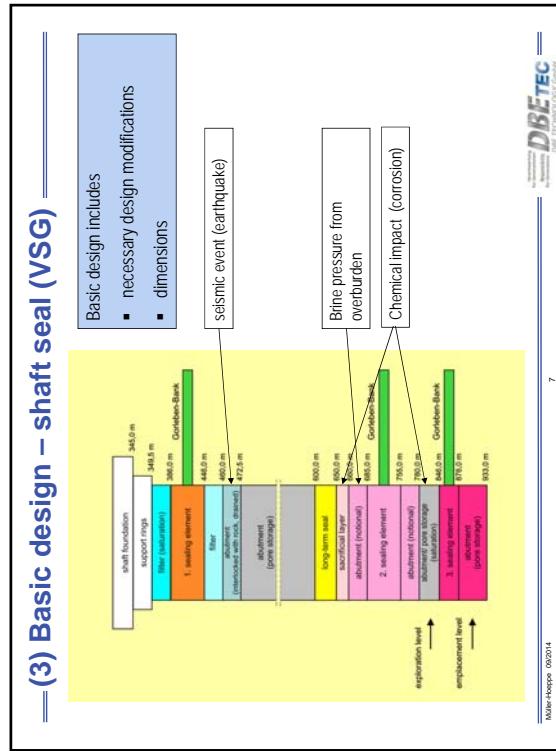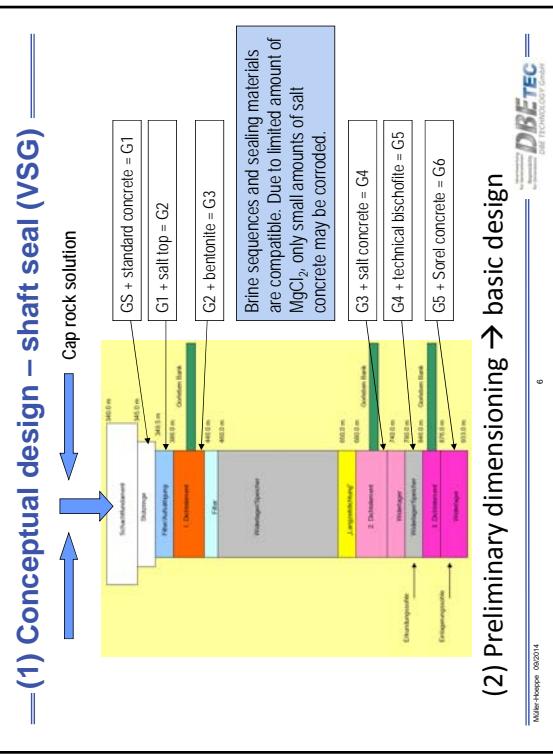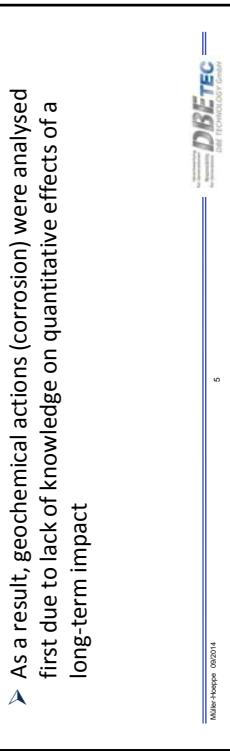

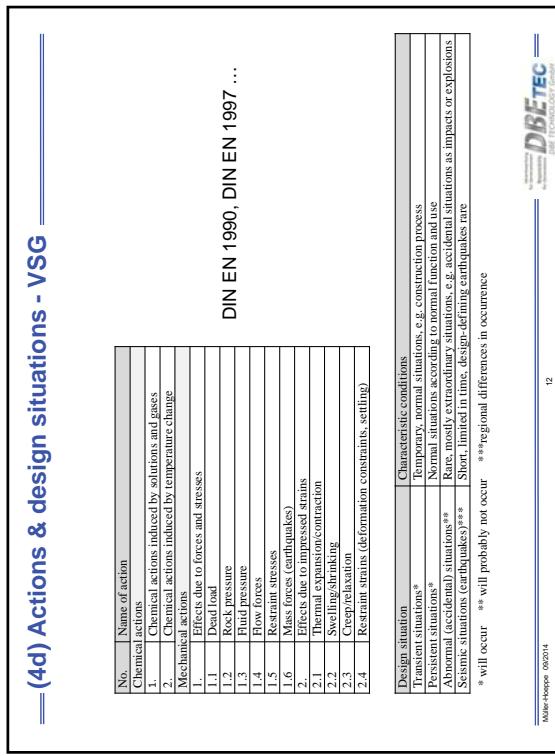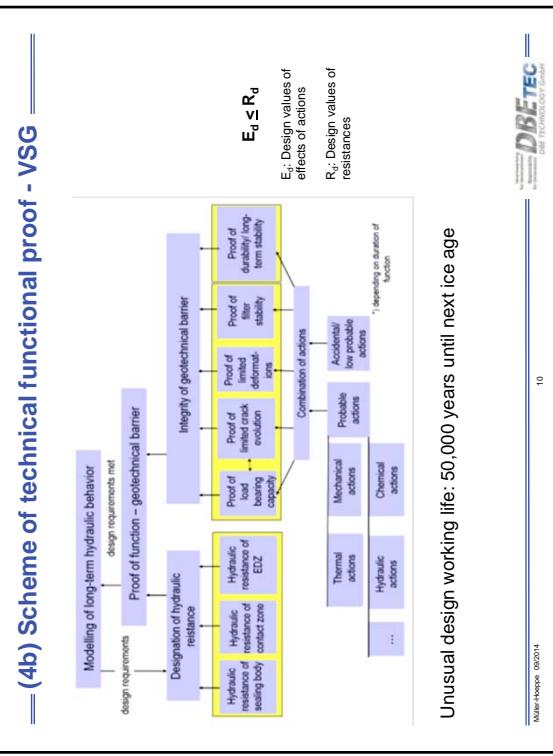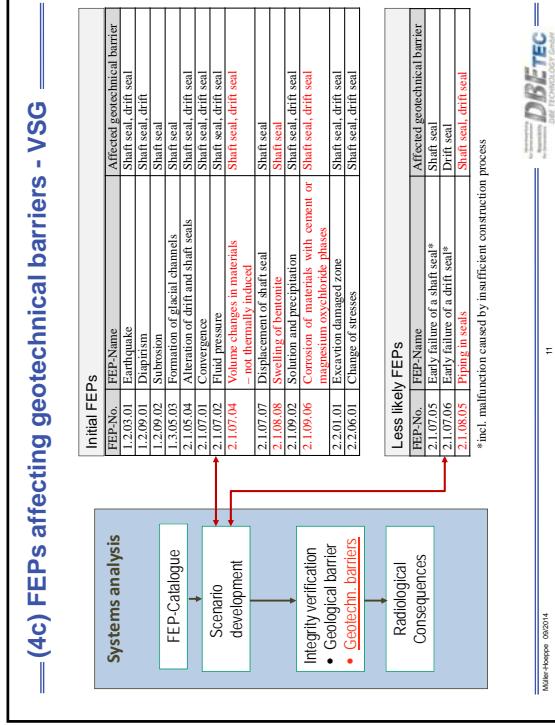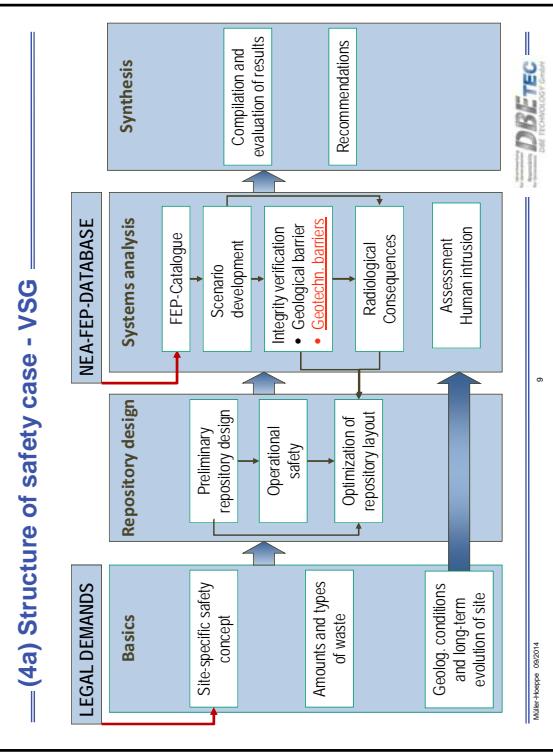

— (4e) Linkage of FEPs, actions & design situations —

Classification within the functional proof^a

FEP-No.	FEP-Name	Classification within the functional proof ^a
1.2.0/01	Earthquake	DS: seismic DS, A: mass forces
1.2.0/01	Displacement	A: restraint strains
1.2.0/02	Subsidence	Excluded because significance starts with next observation (after selected performance period)
1.3.0/03	Formation of glacial channels	Excluded because significance starts with next observation (after selected performance period)
2.1.0/04	Alteration of drift and shaft seals	A: consequence of chemical action incl. temperature
2.1.0/01	Convergence	A: equivalent to rock pressure due to constitutive equation
2.1.0/02	Fluid pressure	A: fluid pressure
2.1.0/04	Volume changes in materials – not thermally induced	A: swelling/shrinking
2.1.0/07	Displacement of shaft seal	A: restraint strains or a consequence of forces/stresses
2.1.0/08	Swelling of bentonite	A: swelling
2.1.0/02	Solution and precipitation	A: consequence of chemical action incl. temperature
2.1.0/06	Corrosion of materials with cement or magnesium oxychloride phases	A: consequence of chemical action incl. temperature
2.2.0/01	Excavation damaged zone	Neither DS, A nor R but component of the seal
2.2.0/01	Change of stresses	DS = design situation A = action R = resistance
^a If classification is impossible or meaningless, a comment is given		


Mater-Holzope 09/2014

DBE-TEC

BRD TECHNOLOGY GROUP

13

— (4f) Calculations - VSG —

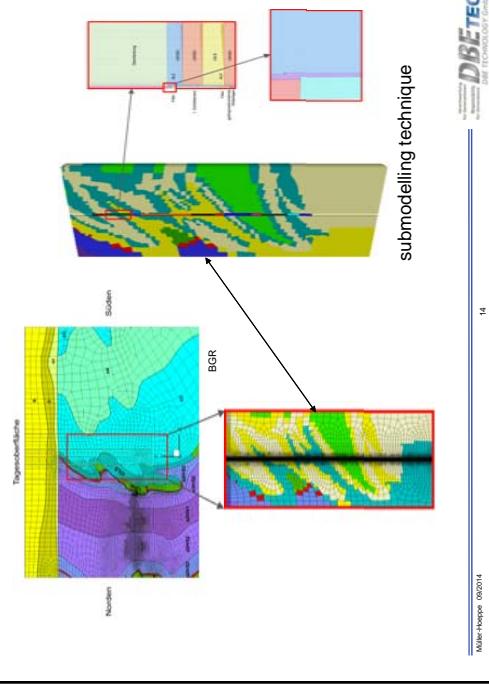

Mater-Holzope 09/2014

DBE-TEC

BRD TECHNOLOGY GROUP

14

— (5) Detailed design —

- Insignificant modifications of basic design

➤ Ready to start construction process



DBE-TEC

BRD TECHNOLOGY GROUP

15

— Results – Integrity of Shaft Seal —

- Individual proofs to guarantee integrity were successful regarding relevant combinations of thermal, mechanical, and chemical actions
- Thus, the prognosis that hydraulic resistance as planned will really be achieved shows high level of reliability
- Pre-condition: Highly qualified construction process
 - “As built” and “as planned” may be different!

DBE-TEC

BRD TECHNOLOGY GROUP

Koln-Holzope 09/2014

16

Conclusions & Outlook

- Regarding VSG shaft seal linkage of safety case & technical functional proof was successfully put into practice
- Progress has been made
 - Individual technical proofs forged ahead
 - Technical specifications are available forming the basis for suitability tests
 - Technical basis to establish quality assurance procedures is available
- Open questions
 - Assessing the influence of contact zones/interfaces
 - Especially experimental data is still rare

Müller-Hoeppe 09/2014

17

DBE TEC
DBE TECHNOLOGY GmbH

Acknowledgements

Many thanks

- to my colleagues Michael Breustedt, Dieter Buhmann, Oliver Czaikowski, Hans-Joachim Engelhardt, Horst Jürgen Herbert, Christian Lerch, Michael Linkamp, Klaus Wieczorek, Johanna Wolf, Mingliang Xie for their contributions to VSG work package 9.2 - Integrity of geotechnical barriers -
- to my colleagues from BGR, BfS, DBE, GRS, IfG, Asse-GmbH (former HMGU & GSF), IBeWa, TU Clausthal for their collaboration
- to the Federal Ministry for the Environment, Nature Conservation, Building, and Nuclear Safety (BMUB) for funding the project

Müller-Hoeppe 09/2014

18

DBE TEC
DBE TECHNOLOGY GmbH

DBE TECHNOLOGY GmbH



Thank you
for your attention!

Müller-Hoeppe 09/2014

19

DBE TEC
DBE TECHNOLOGY GmbH

ELSA – shaft seal project “Phase 2”

Uwe Glaubach

TU Bergakademie Freiberg (TUBAF), Institute of Mining and Special Civil Engineering, Saxony / Germany

Abstract

Salt and clay formations are potential regions for future HLW-repositories in Germany. To fulfill the principle of a geological barrier, the shaft seals are the most important elements in the geotechnical barrier system for underground repositories. The isolation potential of shaft seals has to be as close as possible to the geological barrier.

While approved shaft seal concepts for HLW- repositories universal suitable for salt and clay formations are actual not available, the emphasis of the ELSA project is to design and construct functional components of a long-term stable sealing system for a shaft seal and demonstrate the constructability and functionality.

The ELSA project is a joint research project between TUBAF and DBE-TEC and is portioned into 3 phases, while the phase 1 “Compilation of boundary conditions and design requirements” is finished with an available report (02E10921). At present, the phase 2 “Concept development for shaft seals and demonstration of functional components” is in progress.

The general aims of the ELSA project are:

- Development of a modular and non-site specific shaft sealing concept for salt and clay formations and
- Test of functional components in laboratory scale and half scale.

Specific investigations are carried out in phase 2 on the following topics:

- producibility of backfill columns from compacted crushed salt ($<0.9 \rho_0$)
- calottes from Basalt blocks to support a low-settling gravel column
- abutments and seals from long-term stable (3-1-8) MgO concrete
- grouting technologies to seal DRZ and contact between host rock and sealing elements
- emplacement technologies for bitumen / asphalt sealing elements
- bentonite sealing elements in argillaceous host rock
- model-theoretical analysis on different states of construction, as well as loading and flow processes

The first results showing, that a crushed salt with an optimized grain size distribution gets a better compaction behavior than straight mine-run salt. Investigations on the compaction of an optimized crushed salt with added clay suggests that this material mix has an instant sealing potential.

The MgO-concrete with a 3-1-8 phase is an additional material option for long-term stable abutments and seals in shaft-sealing systems for HLW-repositories.

The generation of a CPA based particle model to analyze the behavior of a gravel column is nearly finished. After calibration of the particle model, the behavior of gravel columns during emplacement and operation can be assessed by simulations.

As before, bitumen / asphalt are still a good option as diverse redundant sealing material. Especially since the wetting of the bituminous binder with the host rock (salt and clay) can be improved with a patented primer (no. DE 102008050211). A “cast in place” bitumen / gravel element is an additional option for a combined abutment / sealing element.



Outline

September 2014



ELSA – shaft seal project Phase 2

Uwe Glaubach

TU Bergakademie Freiberg (TUBAF)



- Introduction
- State of the art
- Aims of the project
- Workprogram & schedule
- Preliminary results
 - Backfill columns made from crushed salt
 - Long-term stable (3-18) MgO concrete
 - Model-theoretical analysis of a gravel column
- Summary and outlook



2

Introduction - general

- Shaft seals are the most important elements in the geotechnical barrier system for underground repositories
- Isolation potential of shaft seals has to be as close as possible to the geological barrier
- Potential repository regions of Germany are in salt and clay formations
- Approved shaft seal concepts for HLW- repositories universal suitable for salt and clay formations are not available
- Knowledge and experience from national and international underground waste disposal projects (mostly site-specific) are important resources for the ELSA – Project

Introduction - partners



2

ELSA is a joint research project:



The University of Resources. Since 1765.

DBE TECHNOLOGY GmbH

Project director:

W. Kulda

W. Bollingerfehr, M. Jobmann

founded by:



with the following partners:

- CMM - KIT
- GSES
- IBeWa Freiberg
- IfG Leipzig
- TS BAU GMBH, NL Jena

3

ELSA - shaft seal project: Phase 2

3

ELSA - shaft seal project: Phase 2

4

Introduction – project structure

- ELSA project is partitioned in 3 phases:

support code:
02E10921
02E10931


Phase 1:
compilation of boundary conditions
and design requirements

support code:
02E11193A

Phase 2:
concept development for shaft seals
and demonstration of functional
components

Phase 3:
demonstration of the developed
sealing concept in full scale test


State of the art – general

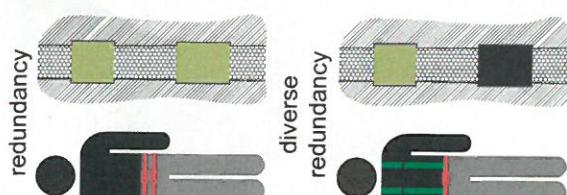

- The final report of phase 1 describes the state of art for shaft seals with long-term stability
- Shaft sealing system "Salzdetfurth" is the basic concept
- Concepts of ERAM, ASSE, KONRAD, WIPP and NAGRA are respected
- Safety analysis projects ISIBEL, ANSICHT and VSG are considered
- HLW- repositories require a distinctive level of safety, so the principle of redundancy or (better) diverse redundancy must apply

6

State of the art – selected concept examples

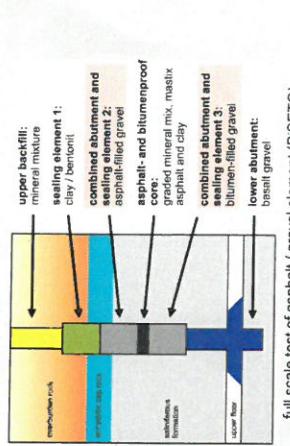


ELSAA - shaft seal project: Phase 2
before casting 30 minutes after casting 24 hours after casting


9

State of the art – selected concept examples

- ERA Morsleben shaft sealing

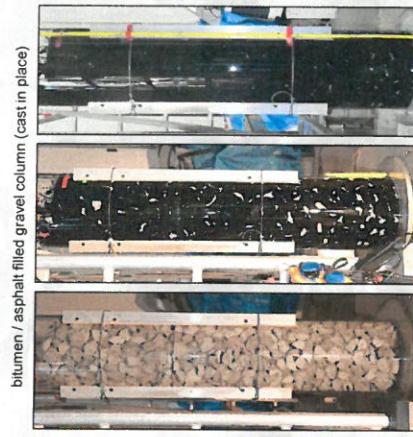

ELSAA - shaft seal project: Phase 2
before casting 30 minutes after casting 24 hours after casting

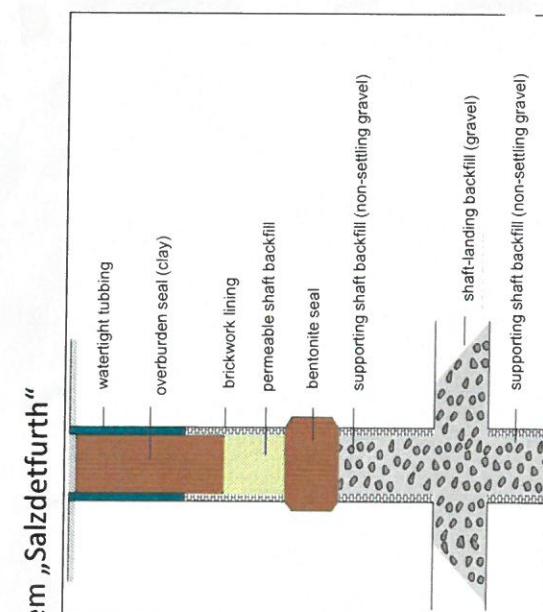


ELSAA - shaft seal project: Phase 2

7

State of the art - latest development


■ Bituminous primer with mining approval

▪ patent no. DE 102008050211

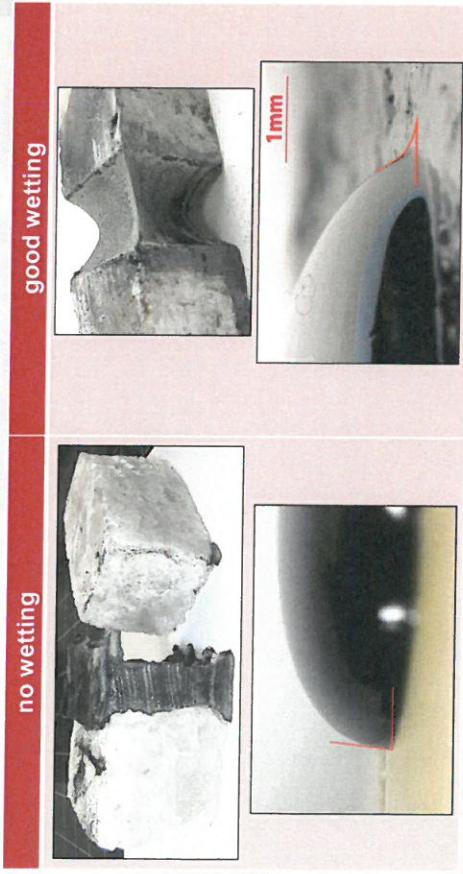

Workprogram & schedule

- WP 1: Concept design of shaft seals for HLW-repositories
- WP 2: Planning of half scale tests (in-situ)
- WP 3: Tests in laboratory scale
- WP 4: Tests in half scale (in-situ)
- WP 5: Modeling
- WP 6: Report

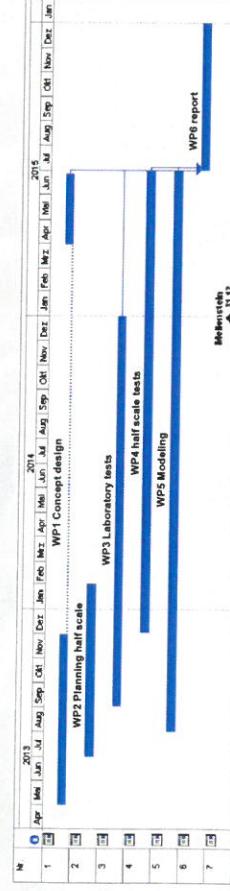

Aims of the project

- general:
 - Development of a modular and non-site specific shaft sealing concept for salt and clay formations
 - Test of functional components in laboratory scale and half scale specific investigations in phase 2:
 - producibility of backfill columns from compacted crushed salt ($<0.9\rho_0$)
 - calottes from Basalt blocks to support a low-settling gravel column
 - abutments and seals from long-term stable (3-1-8) MgO concrete
 - grouting technologies to seal DRZ and contact between host rock and concrete sealing element
 - construction technologies for bitumen / asphalt sealing elements
 - bentonite sealing elements in argillaceous host rock
 - model-theoretical analysis on different states of construction, as well as loading and flow processes

ELSA - shaft seal project: Phase 2

ELSA - shaft seal project: Phase 2

11

Preliminary results

- Backfill columns made from crushed salt (TUBAF)
 - Optimizing the grain size distribution of crushed salt
 - Comparison between REPOPERM material and optimized material
 - Optimization the water and clay content in relation to the compaction energy
 - Emplacement tests of the optimized material
- Long-term stable (3-1-8) MgO concrete (TUBAF)
 - Construction of a half scale test on in-situ material behavior
 - First results
- Model-theoretical analysis of a gravel column (DBE-TEC)
 - generating a gravel model with Particle Flow Code


ELSA - shaft seal project: Phase 2

ELSA - shaft seal project: Phase 2

12

Preliminary results – work package TUBAF

■ Optimizing the grain size distribution of crushed salt

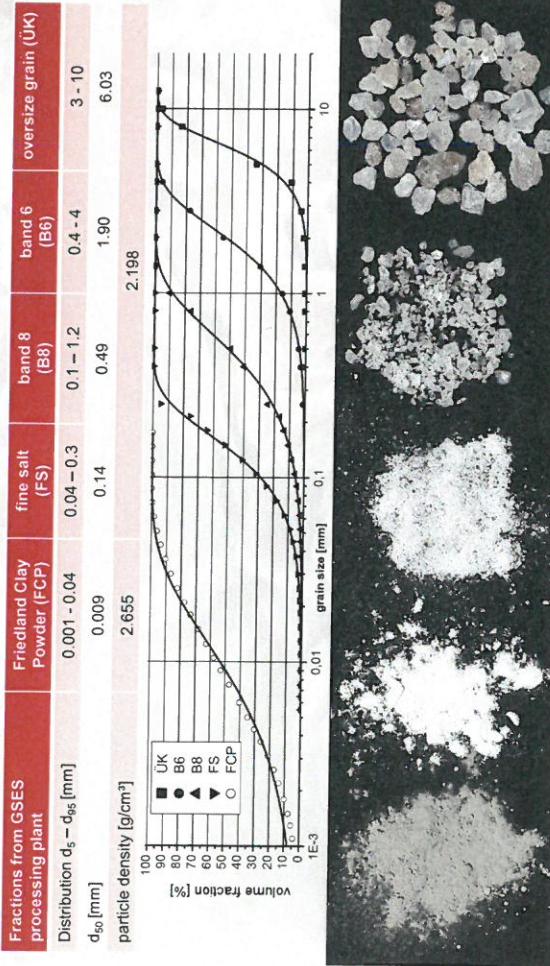


ELSA - shaft seal project: Phase 2

Preliminary results – work package TUBAF

■ Optimizing the grain size distribution of crushed salt

- FULLER-distribution as a first approximation

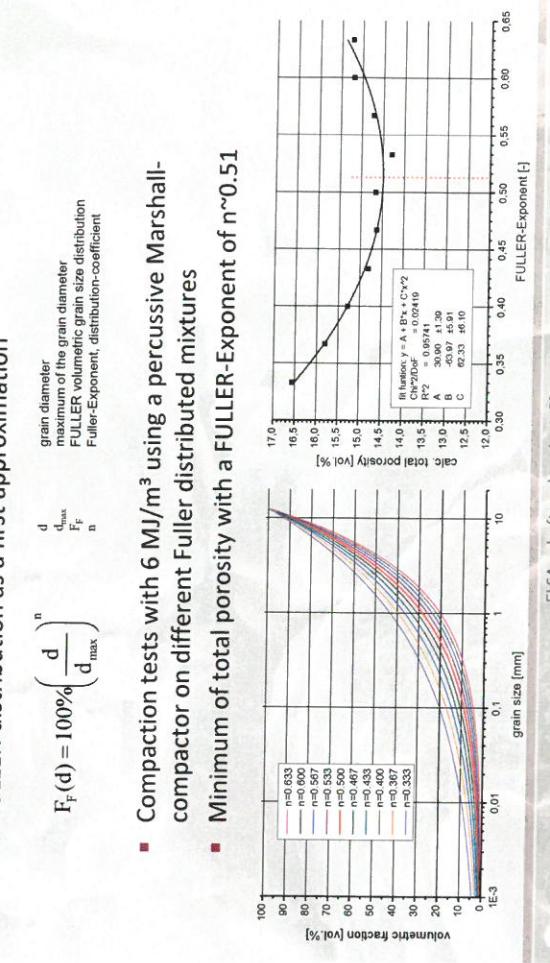

ELSA - shaft seal project: Phase 2

14
15

Preliminary results – work package TUBAF

■ Comparison between REPOPERM material and optimized material

- Analysis was made with respect to the compaction energy and water content
- In contrast to the REPOPERM material, which gained 16.5 vol% porosity with 4 wt% water @ 15 MJ/m³, the FULLER-optimized salt mixture gained around 11.5 vol% porosity.

Preliminary results – work package TUBAF

■ Optimizing the water and clay content regarding the compaction energy (according to BUTCHER 1991)

- optimal clay content is approx. 8 vol% (of dry solids)
- optimal water content depends from compaction energy
- for compaction energies > 10 MJ/m³ the optimal water content is approx. 6.2 vol% (mixture specific ~ 2.7 wt%)

16
17

18
19

20
21

22
23

24
25

26
27

28
29

30
31

32
33

34
35

36
37

38
39

40
41

42
43

44
45

46
47

48
49

50
51

52
53

54
55

56
57

58
59

60
61

62
63

64
65

66
67

68
69

70
71

72
73

74
75

76
77

78
79

80
81

82
83

84
85

86
87

88
89

90
91

92
93

94
95

96
97

98
99

100
101

102
103

104
105

106
107

108
109

110
111

112
113

114
115

116
117

118
119

120
121

122
123

124
125

126
127

128
129

130
131

132
133

134
135

136
137

138
139

140
141

142
143

144
145

146
147

148
149

150
151

152
153

154
155

156
157

158
159

160
161

162
163

164
165

166
167

168
169

170
171

172
173

174
175

176
177

178
179

180
181

182
183

184
185

186
187

188
189

190
191

192
193

194
195

196
197

198
199

200
201

202
203

204
205

206
207

208
209

210
211

212
213

214
215

216
217

218
219

220
221

222
223

224
225

226
227

228
229

230
231

232
233

234
235

236
237

238
239

240
241

242
243

244
245

246
247

248
249

250
251

252
253

254
255

256
257

258
259

260
261

262
263

264
265

266
267

268
269

270
271

272
273

274
275

276
277

278
279

280
281

282
283

284
285

286
287

288
289

290
291

292
293

294
295

296
297

298
299

300
301

302
303

304
305

306
307

308
309

310
311

312
313

314
315

316
317

318
319

320
321

322
323

324
325

326
327

328
329

330
331

332
333

334
335

336
337

338
339

340
341

342
343

344
345

346
347

348
349

350
351

352
353

354
355

356
357

358
359

360
361

362
363

364
365

366
367

368
369

370
371

372
373

374
375

376
377

378
379

380
381

382
383

384
385

386
387

388
389

390
391

392
393

394
395

396
397

398
399

400
401

402
403

404
405

406
407

408
409

410
411

412
413

414
415

416
417

418
419

420
421

422
423

424
425

426
427

428
429

430
431

432
433

434
435

436
437

438
439

440
441

442
443

444
445

446
447

448
449

450
451

452
453

454
455

456
457

458
459

460
461

462
463

464
465

466
467

468
469

470
471

472
473

474
475

476
477

478
479

480
481

482
483

484
485

486
487

488
489

490
491

492
493

494
495

496
497

498
499

500
501

502
503

504
505

506
507

508
509

510
511

512
513

514
515

516
517

518
519

520
521

Preliminary results – work package TUBAF

- Emplacement tests of the optimized material
 - in-situ compaction test in drifted dies using conventional vibrating compactors
 - test on optimized salt-clay-mixture
 - compaction in 0.1 m layers



ELSA - shaft seal project: Phase 2

18

Preliminary results – work package TUBAF

- Compaction by a percussive Compactor
 - using commercial "Rapid Impact Compactor" for feasibility study
 - first field test in summer 2013 was promising
 - compactor spec. (hydraulic drive)
 - high blow ratio of ~40 blows per minute
 - falling weight 9000 kg with controllable falling height of 0.3 – 1.2 m
 - controllable energy per blow of 26.5 - 106 kJ (power: 1.1 - 4.2 MJ/min)
 - compaction foots with diameter from 0.8 m to 2.0 m available




ELSA - shaft seal project: Phase 2

20

Preliminary results – work package TUBAF

- Compaction by a percussive Compactor
 - half scale field test in preparation (may 2015)
 - drilled die in a hard rock quarry or made from reinforced concrete
 - impact compaction of every distinctive pre-compactated concrete layer (0.4 m) with 15 MJ/m³ (3 layers in total)
 - applying the compaction energy at the layer surface with minimal overlapping areas (practical aspect)
 - investigations on:
 - material behavior during compaction
 - spatial distribution of porosity in the compacted body
 - gas- and liquid permeability
 - laboratory tests as reference and quality control

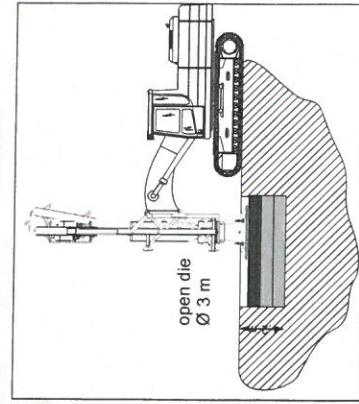


ELSA - shaft seal project: Phase 2

19

Preliminary results – work package TUBAF

- Long-term stable (3-1-8) MgO concrete
 - construction of a half scale test on in-situ material behavior
 - measuring of temperature (BTx), stress (BSx), strain (BDx) and changing of moisture content (TDR sensors) during construction, hydration and maturing

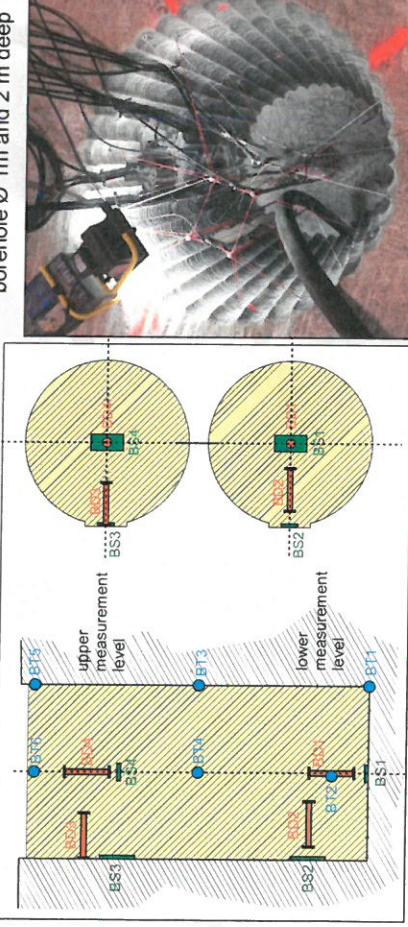


ELSA - shaft seal project: Phase 2

22 ELSA - shaft seal project: Phase 2

Preliminary results – work package TUBAF


- Long-term stable (3-1-8) MgO concrete
 - thermal induced stress temporally over 2.3 MPa during hydration
 - 5–6 days after placing the stresses rises again due to crystallization of the 3-1-8 phase, expansion pressure more than 2.3 MPa!

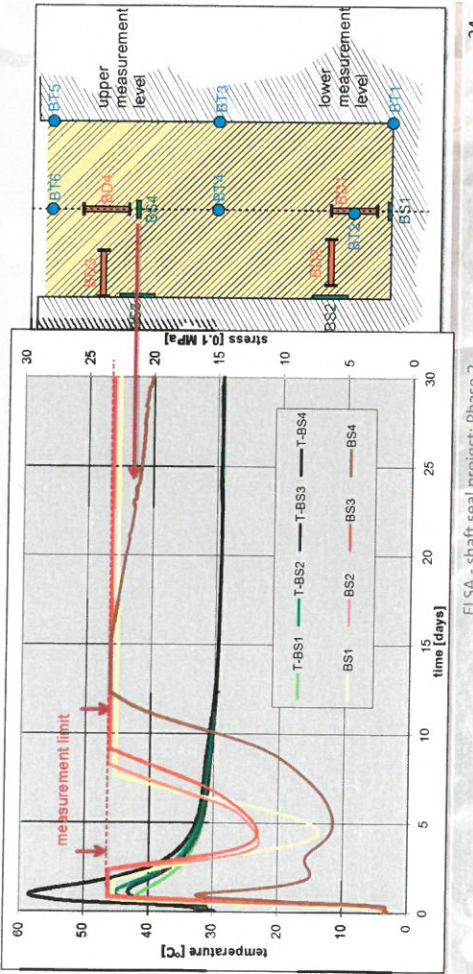

23 ELSA - shaft seal project: Phase 2

Preliminary results – work package TUBAF


- Long-term stable (3-1-8) MgO concrete
 - max. temperature during hydration reached ~69 ° C
 - 24 h after placing
 - heat generation ended after ~ 2 - 3 days of hydration

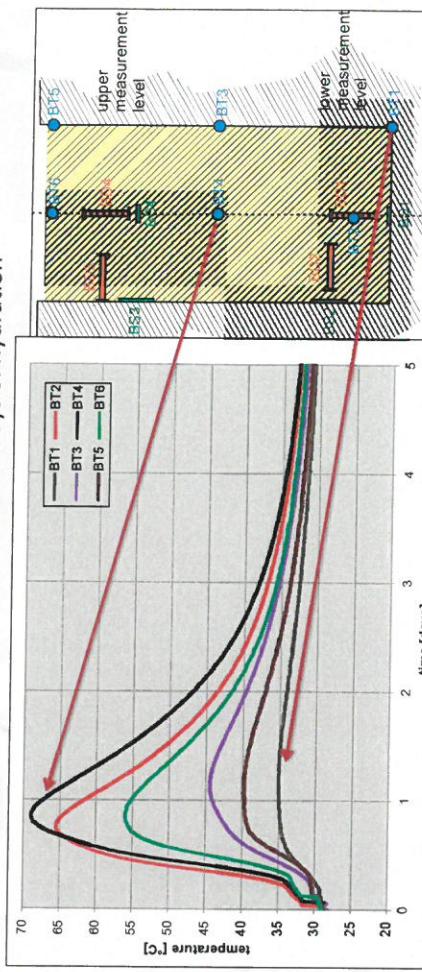

23 ELSA - shaft seal project: Phase 2

Preliminary results – work package TUBAF


- Long-term stable (3-1-8) MgO concrete
 - general expansion comes with the crystallization of the 3-1-8 phase
 - strains in the upper measurement level are much higher due to the lower restraint at the drift floor (salt creep)

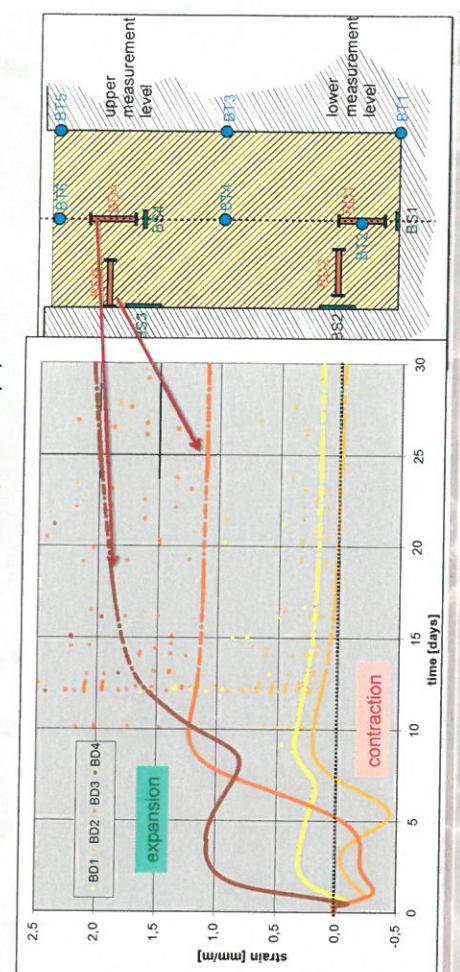



24 ELSA - shaft seal project: Phase 2

Preliminary results – work package DBE-TEC

- Model-theoretical analysis of a gravel column
 - generating a gravel model with Particle Flow Code (PFC – ITASCA)
 - using particle clumps based of statistical data from CPA
 - calibration on dump tests

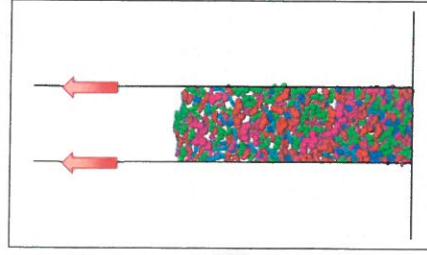

classification in grain size with 5 different grain shapes with different aspect ratios (1.4 – 2.8)

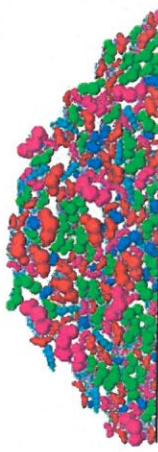

all pictures by P. Herold – DBE-TEC

ELSA - shaft seal project: Phase 2

26

Summary and outlook


- MgO-concrete with 3-1-8 phase is long-term stable in thermodynamic perception, has a lower heat generation than common concrete and therefore a lower thermal shrinkage. The MgO-concrete (3-1-8) is an additional material option for abutments and seals in shaft-sealing systems for HLW-repositories.
- The generation of a CPA based particle model to analyze the behavior of a gravel column is nearly finished. After calibration of the particle model, the behavior of gravel columns during emplacement and operation can be assessed by simulations.
- As before, bitumen / asphalt are a good option as a diverse redundant sealing material. The wetting of the bituminous binder with the host rock (salt and clay) can be improved with a patented primer (German mining approval). A “cast in place” bitumen / gravel element is an additional option for a combined abutment / sealing element.

Thank you for your attention!




=Outline

- Status at US-German Workshops 2010 & 2011
 - Technical design procedure
 - Selected steps of design procedure
 - Results
 - Conclusions & outlook

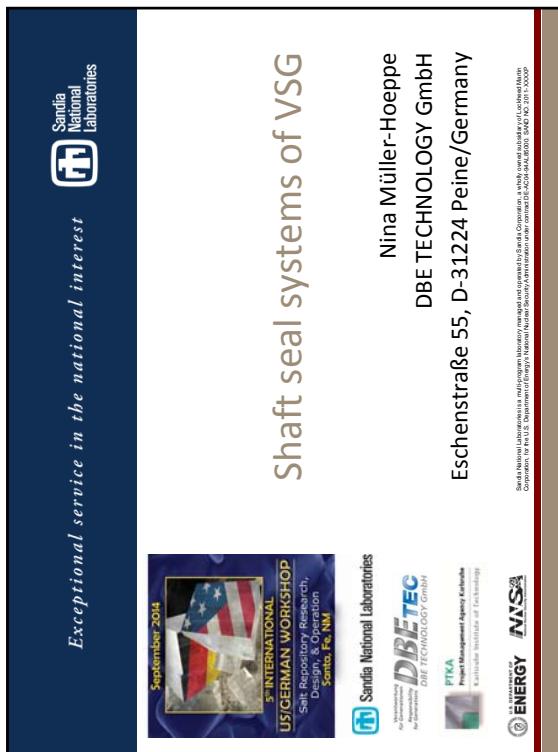

= Status at US-German Workshops 2010 & 2011 =

- The conceptual VSG sealing system (shaft & drift seals) is based on prototypes
 - availability of data for technical specifications (minimize expert judgment)
 - constructability is guaranteed (proof of constructability)
 - The sealing system is constructible and the proof of safety function shows a high degree of reliability
 - But as a draft not yet optimized

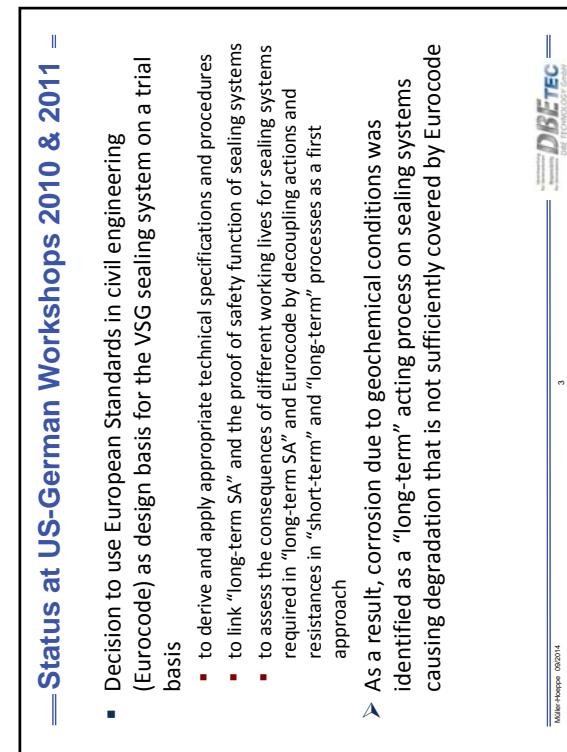


= Status at US-German Workshops 2010 & 2011 =

- to derive and apply appropriate technical specifications and procedures
 - to link "long-term Sa" and the proof of safety function of sealing systems
 - to assess the consequences of different working lives for sealing systems required in "long-term SA" and Eurocode by decoupling actions and resistances in "short-term" and "long-term" processes as a first approach

As a result, corrosion due to geochemical conditions was identified as a "long-term" acting process on sealing systems causing degradation that is not sufficiently covered by Eurocode



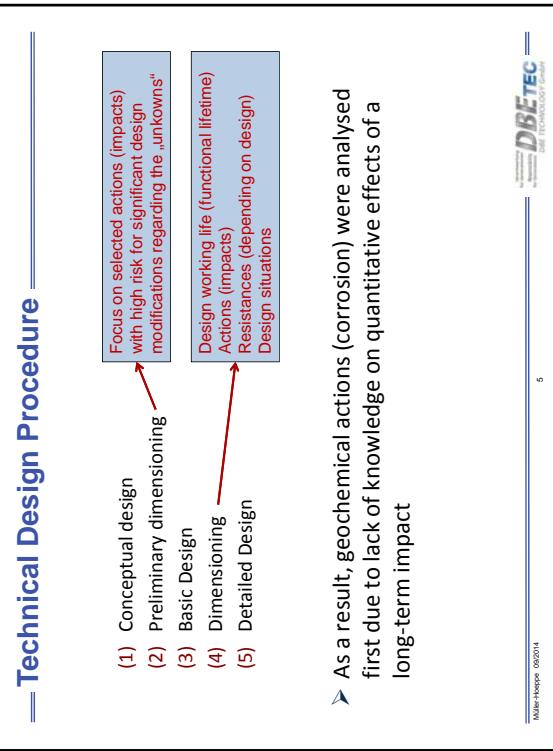


As a result, geochemical actions (corrosion) were analysed first due to lack of knowledge on quantitative effects of a long-term impact

(2) Preliminary dimensioning → basic design

DBE-TEC
Basic Design Technology of Waste
Management and Remediation
in Germany and Worldwide


Mater-Hoppe 09/2014

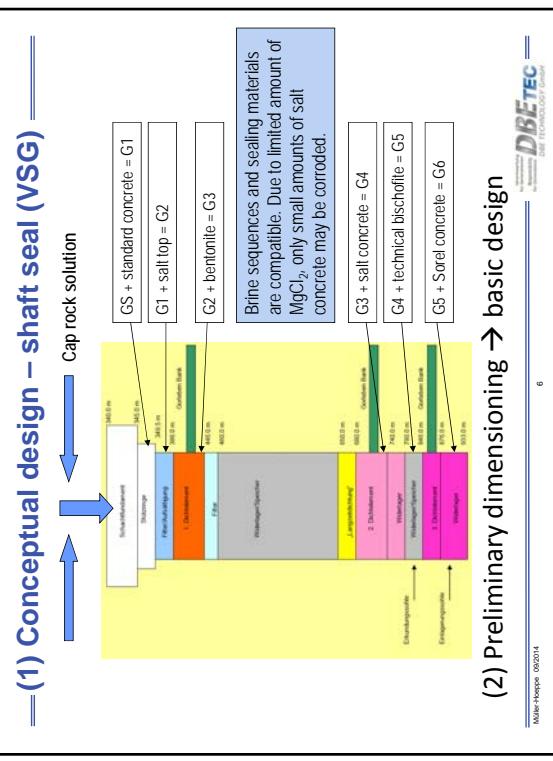

DBE-TEC
Basic Design Technology of Waste
Management and Remediation
in Germany and Worldwide

Mater-Hoppe 09/2014

(3) Basic design – shaft seal (VSG) —

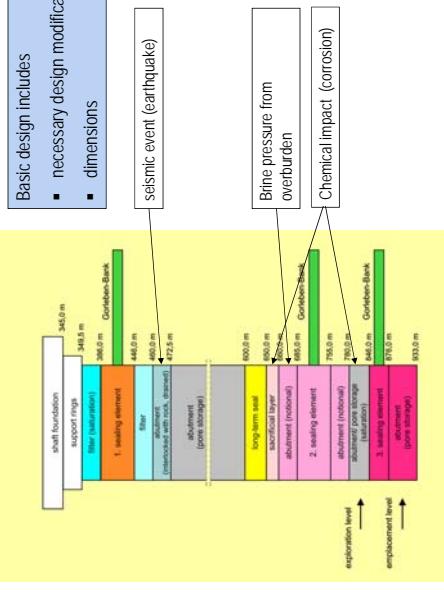

DBE-TEC
Basic Design Technology of Waste
Management and Remediation
in Germany and Worldwide





Mater-Hoppe 09/2014

(4) Dimensioning —

- Basic design is a highly back coupled “input structure” for systems analysis within the safety case
 - Significant basic design modifications are possible in principle
- But the structure of the safety case may significantly be affected
- “Good” basic design is essential

DBE-TEC
Basic Design Technology of Waste
Management and Remediation
in Germany and Worldwide

Mater-Hoppe 09/2014

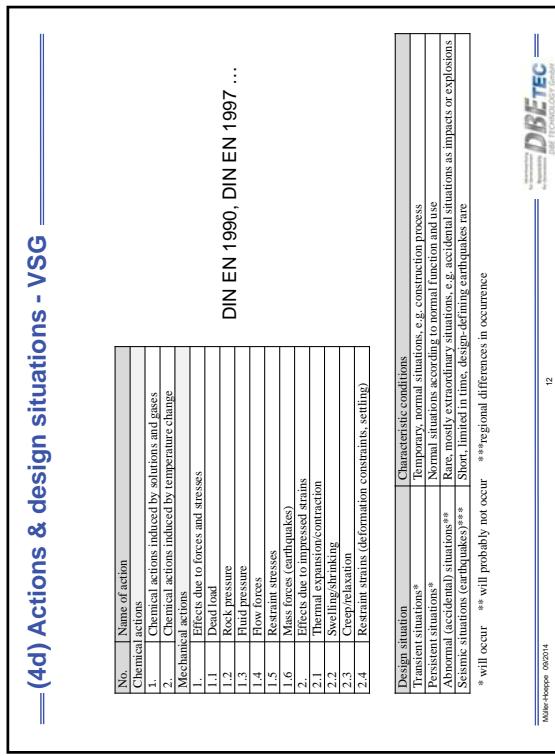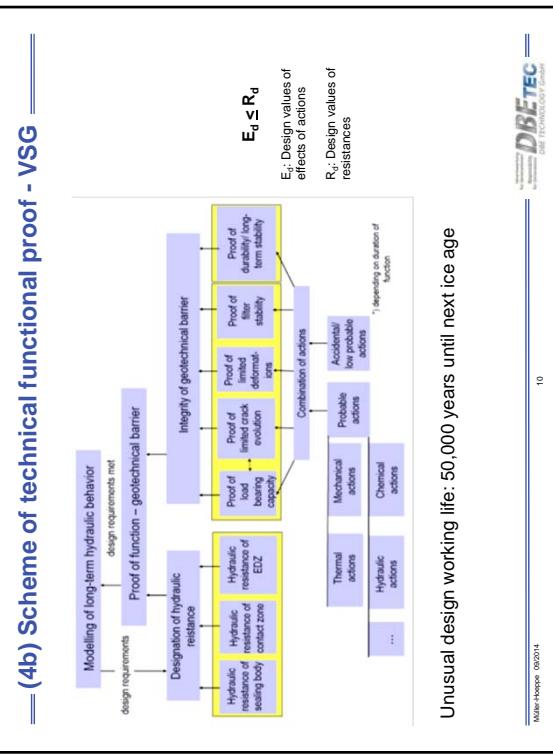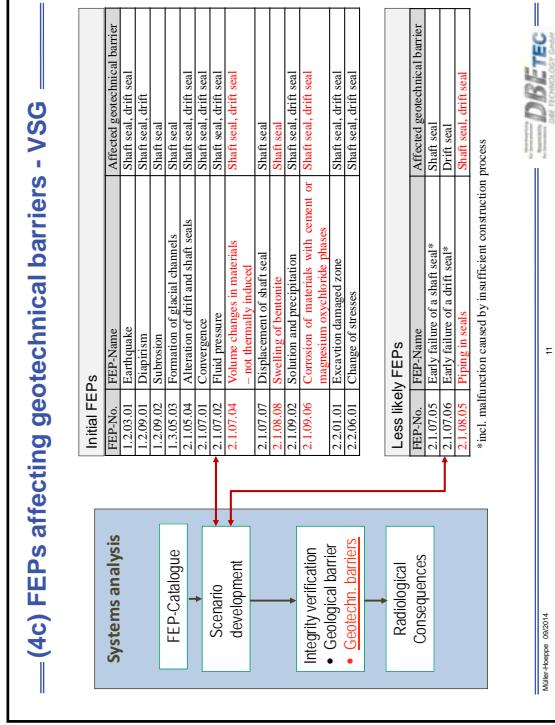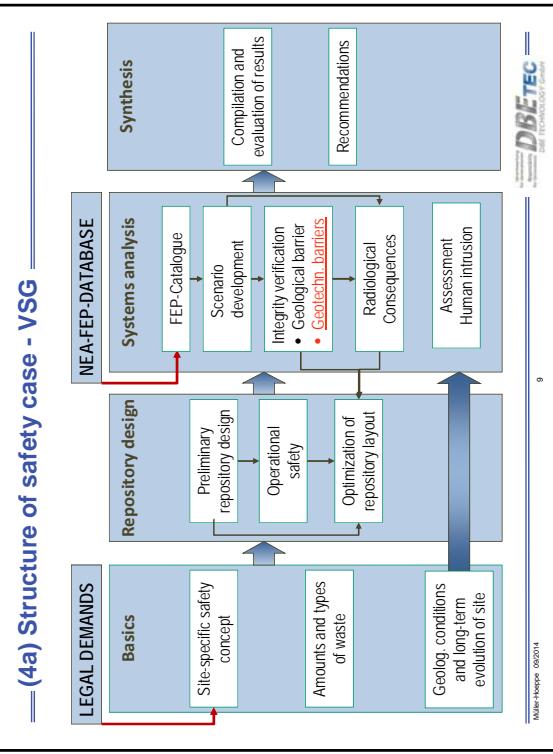

— (4e) Linkage of FEPs, actions & design situations —

Classification within the functional proof*

FEP-No.	FEP-Name	Classification within the functional proof*
1.2.0/01	Earthquake	DS, seismic DS, A, mass forces
1.2.0/01	Displacement	A, restraint strains
1.2.0/02	Subsidence	Excluded because significance starts with next observation (after selected performance period)
1.3.0/03	Formation of glacial channels	Excluded because significance starts with next observation (after selected performance period)
2.1.0/04	Alteration of drift and shaft seals	A, consequence of chemical action incl. temperature
2.1.0/01	Convergence	A, equivalent to rock pressure due to constitutive equation
2.1.0/02	Fluid pressure	A, fluid pressure
2.1.0/04	Volume changes in materials – not thermally induced	A, swelling/shrinking
2.1.0/07	Displacement of shaft seal	A, restraint strains or a consequence of forces/stresses
2.1.0/08	Swelling of bentonite	A, swelling
2.1.0/02	Solution and precipitation	A, consequence of chemical action incl. temperature
2.1.0/06	Corrosion of materials with cement or magnesium oxychloride phases	A, consequence of chemical action incl. temperature
2.2.0/01	Excavation damaged zone	Neither DS, A nor R but component of the seal
2.2.0/01	Change of stresses	DS = design situation A = action R = resistance

* If classification is impossible or meaningless, a comment is given

FEP-No. FEP-Name Classification within the functional proof

2.1.0/05	Early failure of a shaft seal	DS, abnormal situation
2.1.0/06	Early failure of a drift seal	DS, abnormal situation
2.1.0/05	Printing in seals	A, consequence of chemical actions or flow forces


Mater-Holzope 09/2014

FEP-No. FEP-Name Classification within the functional proof

2.1.0/05	Early failure of a shaft seal	DS, abnormal situation
2.1.0/05	Printing in seals	A, consequence of chemical actions or flow forces

Mater-Holzope 09/2014

— (4f) Calculations - VSG —

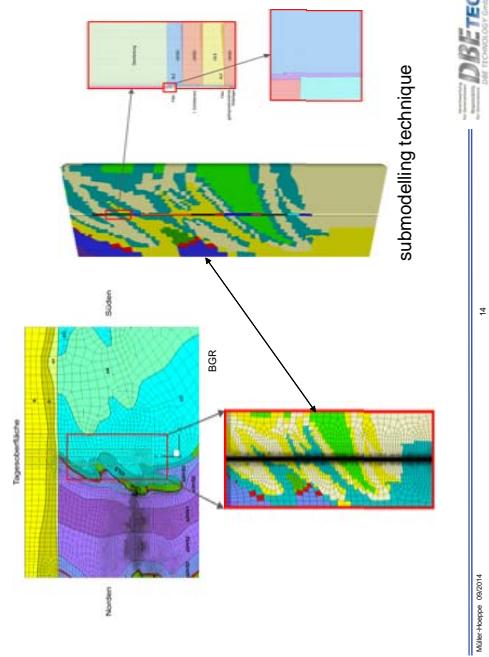

DBE-TEC

—

<p

Conclusions & Outlook

- Regarding VSG shaft seal linkage of safety case & technical functional proof was successfully put into practice
- Progress has been made
 - Individual technical proofs forged ahead
 - Technical specifications are available forming the basis for suitability tests
 - Technical basis to establish quality assurance procedures is available
- Open questions
 - Assessing the influence of contact zones/interfaces
 - Especially experimental data is still rare

Müller-Hoeppe 09/2014

17

DBE TEC
DBE TECHNOLOGY GmbH

Acknowledgements

Many thanks

- to my colleagues Michael Breustedt, Dieter Buhmann, Oliver Czaikowski, Hans-Joachim Engelhardt, Horst Jürgen Herbert, Christian Lerch, Michael Linkamp, Klaus Wieczorek, Johanna Wolf, Mingliang Xie for their contributions to VSG work package 9.2 - Integrity of geotechnical barriers -
- to my colleagues from BGR, BfS, DBE, GRS, IfG, Asse-GmbH (former HMGU & GSF), IBeWa, TU Clausthal for their collaboration
- to the Federal Ministry for the Environment, Nature Conservation, Building, and Nuclear Safety (BMUB) for funding the project

Müller-Hoeppe 09/2014

18

DBE TEC
DBE TECHNOLOGY GmbH

DBE TECHNOLOGY GmbH



Thank you
for your attention!

Müller-Hoeppe 09/2014

19

DBE TEC
DBE TECHNOLOGY GmbH

Salt Reconsolidation Principles and Application

5th US/German Workshop on
Salt Repository Research, Design and Operations

Santa Fe, New Mexico, USA

September 7-11, 2014

Frank Hansen--Sandia National Laboratories, Albuquerque New Mexico USA

Till Popp--Institut für Gebirgsmechanik (IfG), Leipzig, Germany

Klaus Wiegczorek--Gesellschaft für Anlagen- und Reaktorsicherheit (GRS),
Braunschweig, Germany

Dieter Stührenberg--Bundesanstalt für Geowissenschaften und Rohstoffe (BGR),
Hannover, Germany

Abstract

Mechanical and hydrological properties of reconsolidating salt are functions of porosity which decreases as the surrounding salt formation creeps inward and compresses granular salt within the rooms, drifts or shafts. Construction circumstances within a vertical shaft provide substantial advantage for dynamic compaction techniques capable of creating high emplacement density and low initial porosity. Placement of granular salt in a horizontal drift suffers from a less favorable construction orientation and may yield lower emplaced density and significant initial porosity for its evolutionary evaluation. Drift placement of granular salt is expected to function as a low-porosity, low-permeability structural element with vital repository performance expectations. The material covered in this presentation demonstrates collaboration on a key technical issue to establish the state-of-the-art for a Salt Club report. It provides a review of essential aspects of engineering barriers of low-porosity crushed salt, which will continue to consolidate and decrease permeability.

The current state of knowledge benefits from large amounts of pertinent information on granular salt reconsolidation ranging over a length scale from atomic spacing to tens of meters. However, repository applications are concerned with very long time periods and in some cases properties of reconsolidating salt are predicted to occur far into the future after initial placement. Extrapolation based on modeling is often invoked to estimate engineering performance beyond the human experience, which by its very nature introduces an element of uncertainty. Construction techniques capable of emplacing granular salt seals, perhaps with additives, to near final performance conditions greatly reduce the need for extrapolation. Much of the potential performance uncertainty can be removed by deepening the mechanistic understanding through continued research and additional validation garnered from analogues from industry practice and nature.

Sandia National Laboratories is a multi-program laboratory operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DEAC04-94AL85000. From SAND2014-4502P. SAND2014-16021A.

Salt Reconsolidation Principles and Application

Frank Hansen-Sandia National Laboratories, Albuquerque New Mexico USA

Til Popp-Institut für Gebirgsmechanik (IG), Leipzig, Germany

Klaus Wierzorek-Gesellschaft für Anlagen- und Reaktorsicherheit (GRS), Braunschweig, Germany

Dieter Stühnberg-Bundesanstalt für Geowissenschaften und Rohstoffe (BGR), Hannover, Germany

September 7-11, 2014

Santa Fe, New Mexico, USA

Salt Repository Research, Design and Operations

Solid Waste Management Project, Karlsruhe Institute of Technology, Karlsruhe, Germany

DOE-FTEC

PTKA

NASA

US INTERNATIONAL
US/GERMAN WORKSHOP
Salt Repository Research,
Design, & Operation
Santa Fe, NM

September 2014

Sandia National Laboratories

DOE-FTEC Technology

Project Management Agency Karlsruhe Institute of Technology


NASA

U.S. Department of Energy
U.S. Nuclear Regulatory Commission
U.S. Environmental Protection Agency
Sandia National Laboratories

Presentation Content

- Background
- Micromechanics-hydro-mechanical interactions
- Experimental salt reconsolidation mechanics
- Transport properties of compacted crushed salt
- Natural analogues--Field-scale observations--Applications
- Perceptions--Future work


2

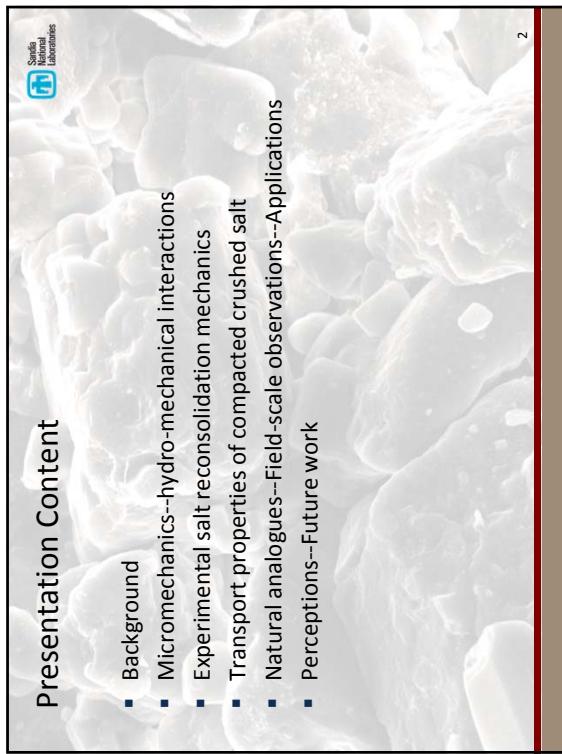

Background—Role of Reconsolidated Salt

- Act as a long-term barrier against inflowing brine or water and eliminate release pathways via drifts and shafts
- Conduct heat generated by radioactive decay from the waste to the host rock
- Stabilize repository excavations
- Provide low permeability and/or diffusivity and/or long-term retardation
- Key questions involve how, when, and to what degree properties of reconsolidating granular salt approach or attain those of the native salt formation

3

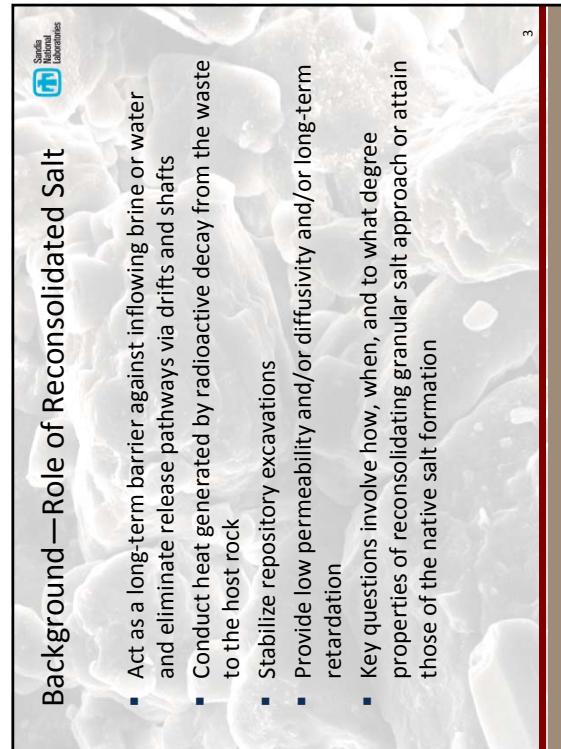


Micromechanics





Acting deformation mechanisms in granular salt





- Time-independent deformation
 - Elastic deformation
 - Plastic deformation
 - Viscous deformation
 - Viscous elastic
 - Viscous plastic
 - Time-dependent deformation
 - Phases solid-state stress
 - Volume diffusion
 - Grain boundary diffusion
 - Phase transition
 - Local stress induced pressure reduction
 - Subatomic transfer
 - Pressurization

Note:Source: (modified after Elliger, 2004)

4

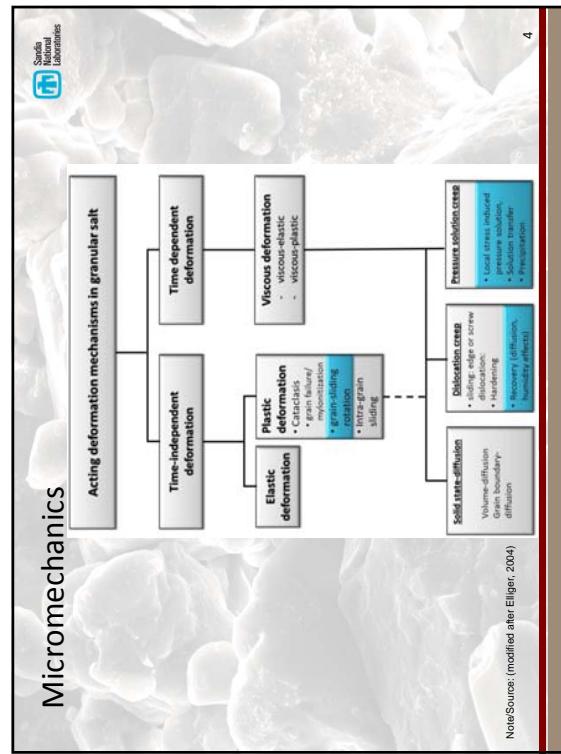

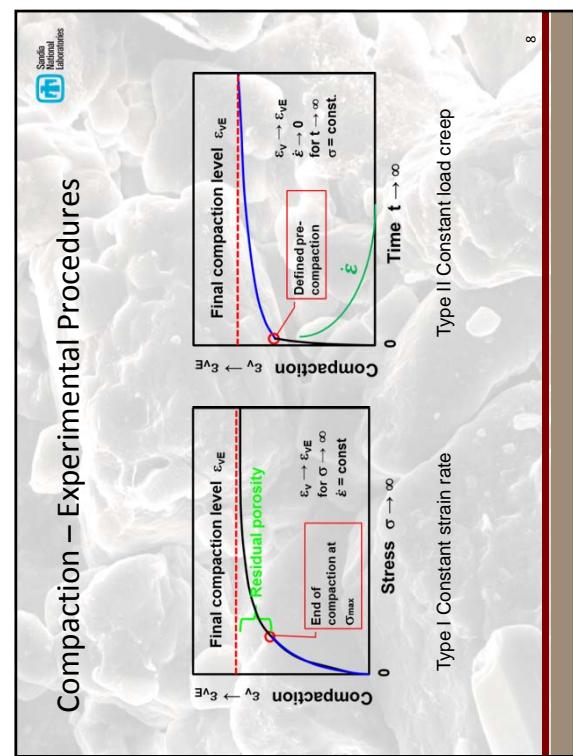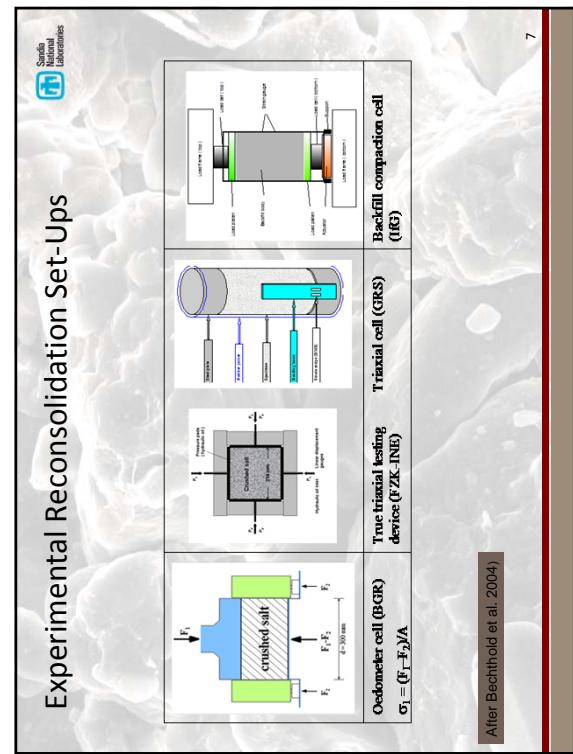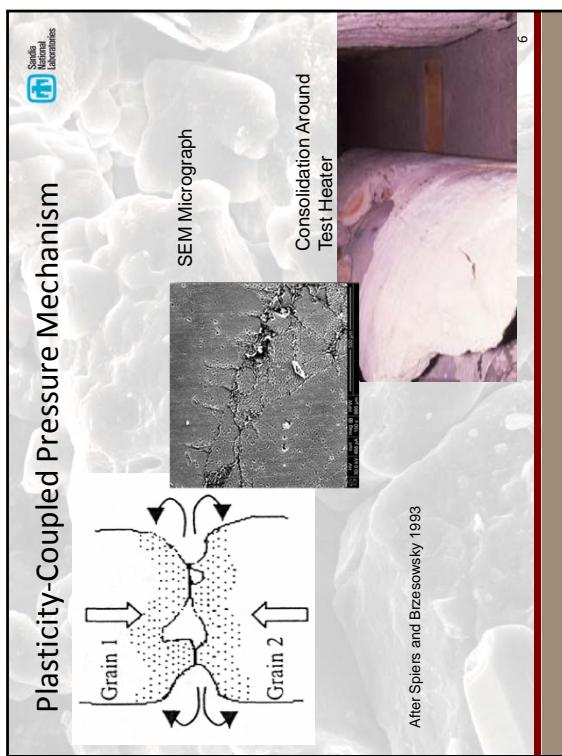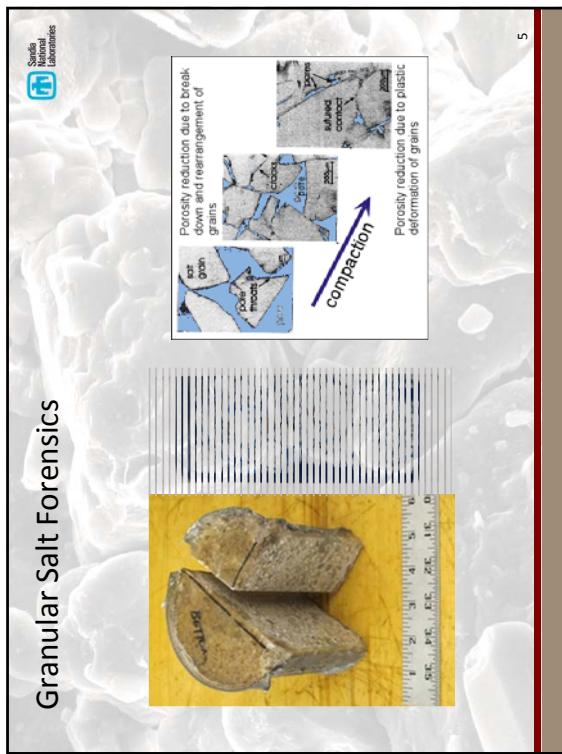


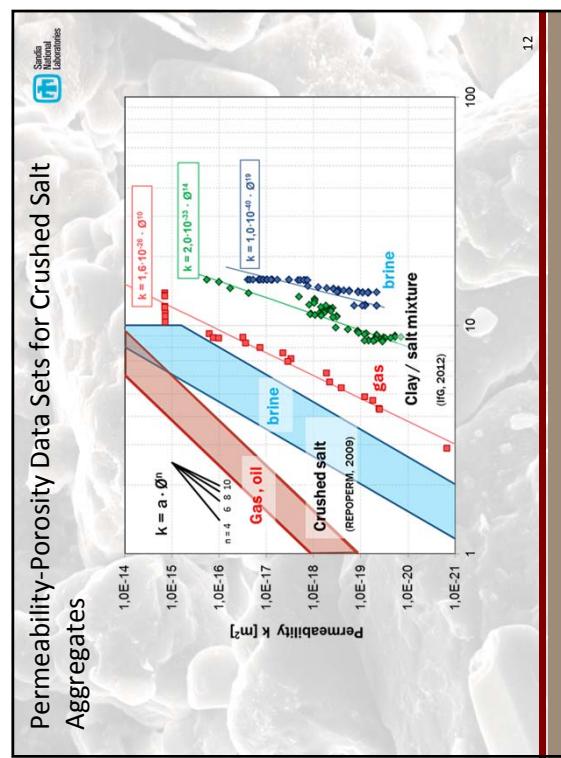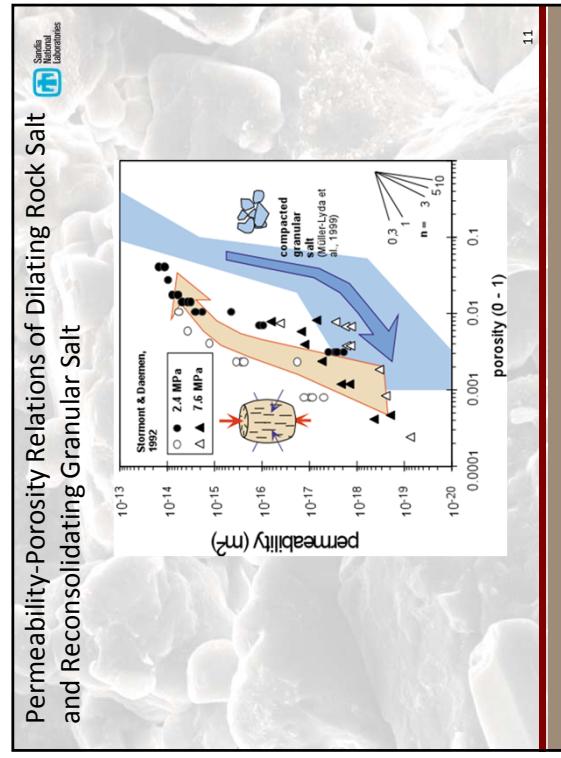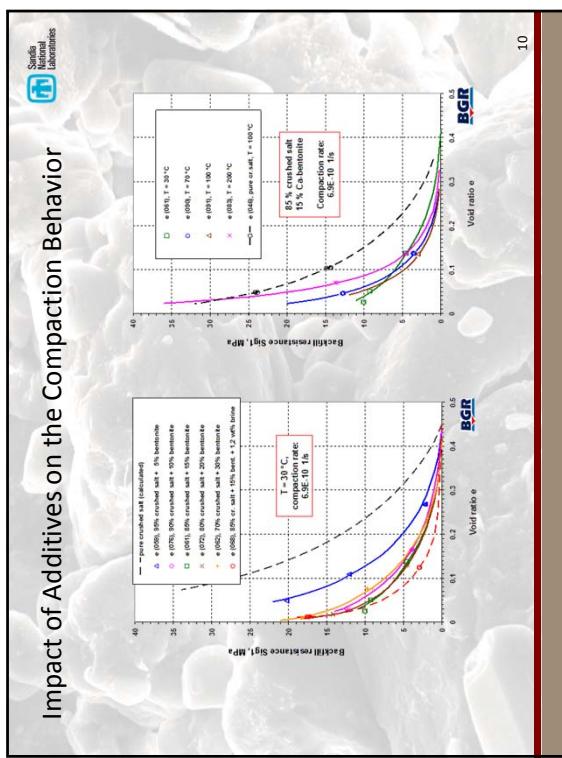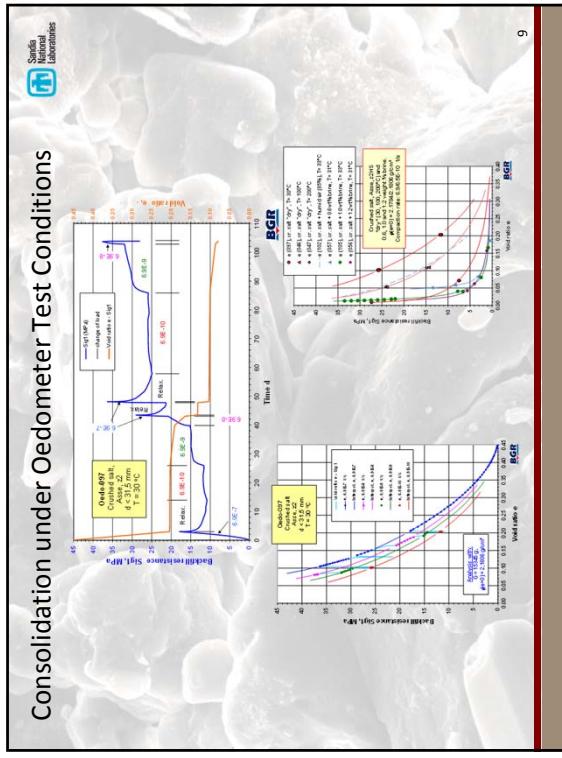

Summary of Analogues



Volumetric Strain and Brine Flow Measurements

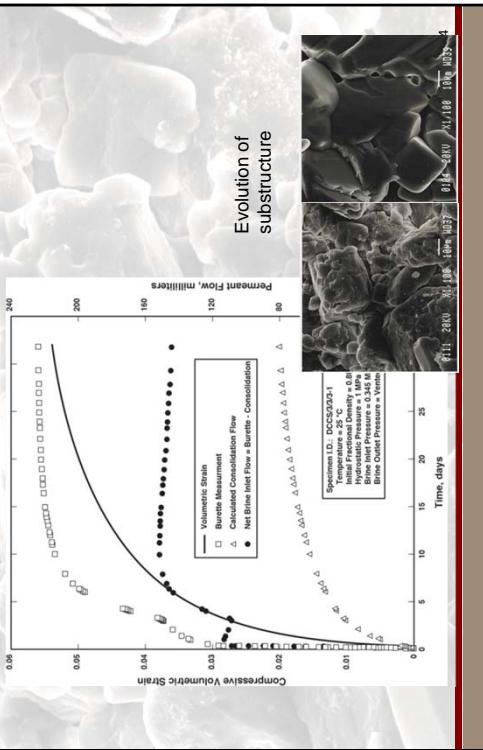

Perceptions--Future Work

- What final porosity of crushed salt is necessary to achieve an efficient seal and at which time can it be reached?
 - Capability of additives such as moisture and clay can be optimized for construction and attainment of sealing properties
 - The nature of testing fluids (brine or gas) and the resultant permeability/porosity relationships warrant further examination
 - Numerical modeling provides capabilities but lacks low porosity verification
 - Further analogue experience from underground sources is imperative

Used Fuel Report

Granular Salt Summary:
Reconsolidation Principles and
Applications

Fuel Cycle Research & Development

Prepared for
U.S. Department of Energy
Used Fuel Disposition
National Laboratories

M. Hansen, Sandia National Laboratories, (ITG)
 PEGO, Institut für Anlagen- und
 Reaktordesign, Gesellschaft für Anlagen- und
 Reaktordesign e.V.
 Deutscher Stahlbau-Verband, Bundesinstitut für
 Stahlbau und Eisenbautechnik und Konstrukte (BStV)

Sandia National Laboratories

July 2014

FCR-UFD-2014-00190 Rev. 0

Exceptional service in the national interest

Sandia National Laboratories

September 2014

Discrepancy between modeling and measurement in the realization of seals

N. Müller-Hoeppé, C. Lerch, H. Schmidt
DBE TECHNOLOGY GmbH
Eschenstraße 55, D-31224 Peine/Germany

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation. It is operated for the National Nuclear Security Administration under contract DE-AC04-94ER41132. Sandia has 12,000 employees.

INTERNATIONAL
US/GERMAN WORKSHOP
Salt Repository Research,
Design, & Operation
Santo, N.M.

DBE TECHNOLOGY GmbH
Project Management Agency Karlsruhe
PTKA Project Management Agency Karlsruhe
NASA National Aeronautics and Space Administration
DOE Department of Energy

Outline

- Pre-conditions & pilot seals in Germany
- Goals of the Asse seal project
- Test field & in situ investigations
- Calculation procedure and results
- Comparison of calculated and measured stresses
- Evaluation and conclusions 2008 & 2014

Küller-Hoeppé 09/2014

DBE TECHNOLOGY GmbH
DBE TECHNOLOGY GmbH

2

Pre-conditions

Pilot seal → but very few are realized

- (1) Measuring data must be available
- (2) Calculation results suitable for comparison must be available
- (3) Good documentation status
- (4) Advantageous: Finished project to avoid change of interpretation subsequently
- (5) Measuring data as well as calculation results must be publicly available
- (6) How to report about discrepancies between measurements and calculations?

Küller-Hoeppé 09/2014

DBE TECHNOLOGY GmbH
DBE TECHNOLOGY GmbH

3

Pilot seals in Germany

Projects:

- Shaft seal Salzdetfurth
- Asse-seal (Asse-Vordamm)
- Asse pilot flow barriers (PSB A1 and PSB A2)
- ERAM plug
- other seal projects (CARLA, Sondershausen)

→ Asse-seal is chosen for example

→ All reports were published in the framework of VSG thanks to BMUB and BfS

Küller-Hoeppé 09/2014

DBE TECHNOLOGY GmbH
DBE TECHNOLOGY GmbH

4

Goals of the Asse-seal Project (2001 - 2008)

"In context with the closure of the Morsleben repository (ERAM) the potential migration of brine and gas passing salt-concrete seals has to be evaluated. According to present knowledge the contact zone between the sealing body and the surrounding rock is an important migration path and thus is decisive for the permeability of the seal. In order to show that the hydraulic conductivity of the seal is sufficiently small, the permeability of the contact zone has to be quantified. Respectively, it has to be shown that no defects exist in the contact zone leading to an intolerable degree of permeability of the seal, i.e. exceeding a permeability of 10^{-18} m^2 on average. According to technical regulations in Germany investigations on comparable structures are required to assess the tightness of contact zones.

For this purpose a 10-year-old salt-concrete seal in the Asse mine in Lower Saxony has been investigated, whose structure is comparable to the seals planned for the ERAM. This seal had been built within the framework of an abandoned research project. A detailed investigation concept comprising in-situ measurements and laboratory tests was developed and a method has been established to transfer the boundary conditions of the Asse mine to the ERAM, where the seals will be constructed." Source / Contribution WM-523, Waste Management Conf. 2005

Müller-Hoeppe 09/2014

DBE-TEC
DIE TECHNOLOGIE DER SICHERHEIT
Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

Müller-Hoeppe 09/2014

DBE-TEC
DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen





© DBE-TEC

DBE-TEC

DIE TECHNOLOGIE DER SICHERHEIT

Anwendungstechnik für die Sicherung von Rohrleitungen und Betonbauteilen

© DBE-TEC

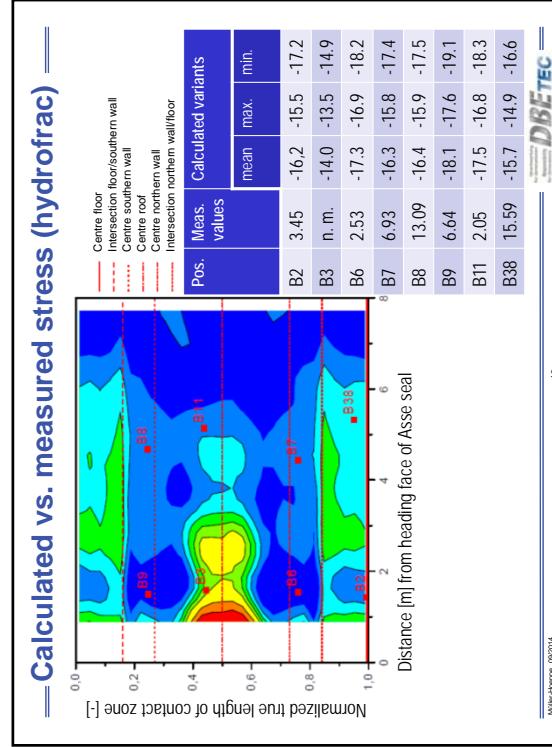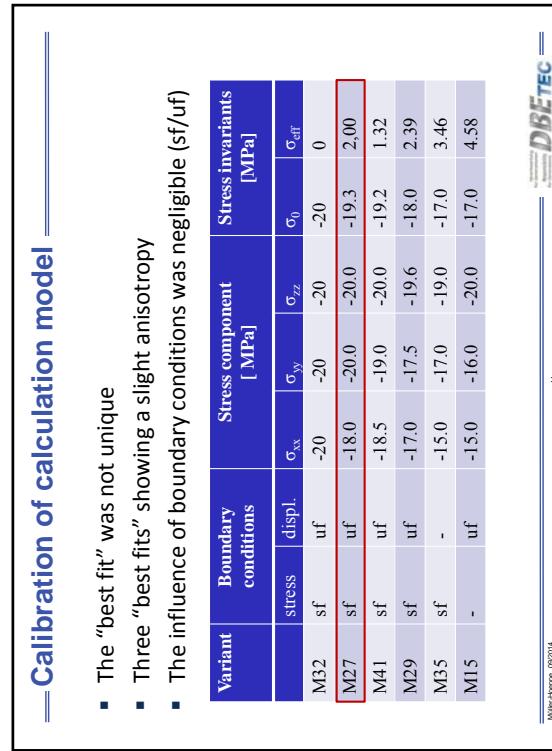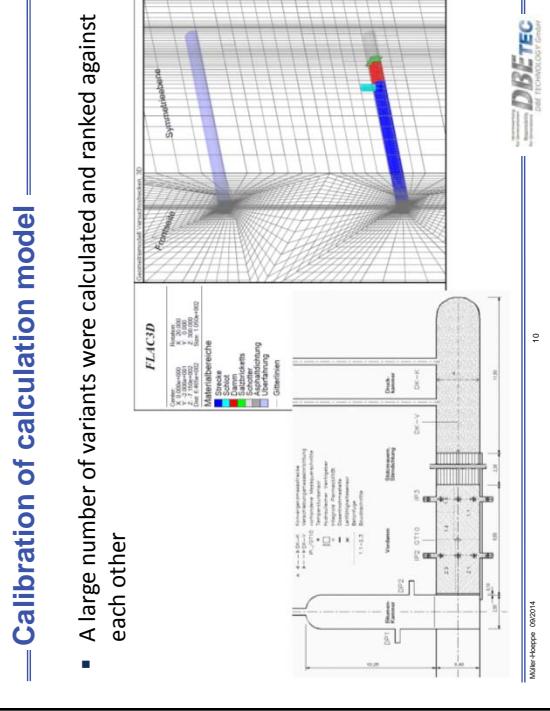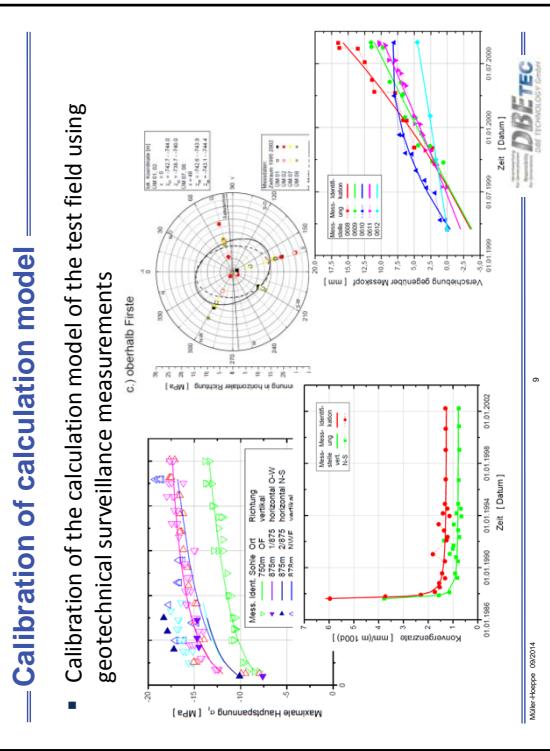

Calculated vs. measured stresses (hydrofrac) =

- Approximately comparable calculated stresses at similar positions, only slight deviations due to anisotropic stress boundary conditions
- Wide range of measured stresses (hydrofrac) at comparable positions
- Large discrepancies between calculated and measured stresses, good agreement only at 2 (out of 8) positions (B8 and B38)
- Explanation?


Müller-Hoeppe 09/2014

DBE-TEC

E&I TECHNOLOGY GmbH

13

Stress measurements (pressure cells) =

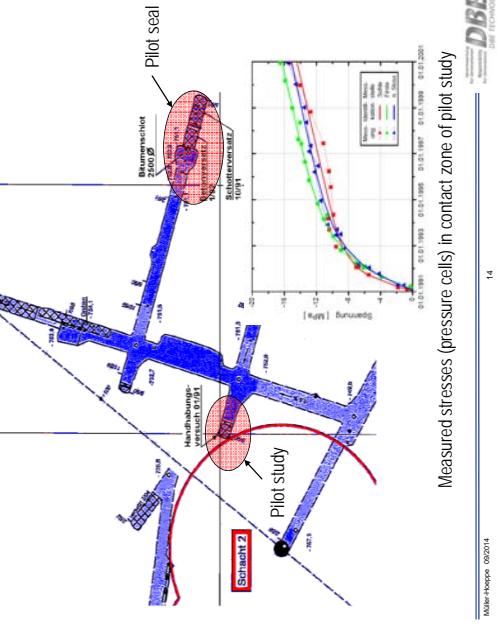

Müller-Hoeppe 09/2014


DBE-TEC

E&I TECHNOLOGY GmbH

14

Calculated vs. measured stress (pressure cells)

Good agreement of calculated and measured stresses

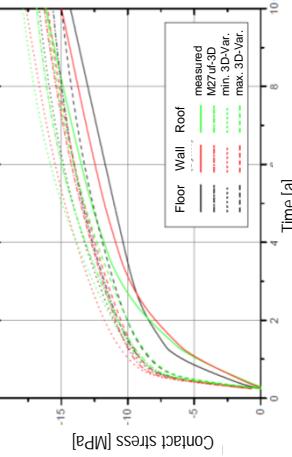

Müller-Hoeppe 09/2014

DBE-TEC

E&I TECHNOLOGY GmbH

15

Evaluation & conclusion 2008

- The discrepancy between calculated and measured stresses (hydrofrac) lead to detailed investigations
 - Fortunately, additional stress measurements (pressure cells) were available
 - Applying pressure cells the direction of measured stress is fixed, the stress component within the stress tensor may vary
 - Calculated stresses and measured stresses from pressure cells agree well
 - Hydraulic fracturing shows wide range of least principal stresses and varying directions in the contact zone
- In 2008 permeability was assumed to be constant material property → The goals of the Asse seal project were successfully achieved showing a sufficiently low permeability of the contact zone

Müller-Hoeppe 09/2014

DBE-TEC

E&I TECHNOLOGY GmbH

16

Evaluation & conclusion 2014

- Review of 2008 results: The discrepancy itself was explained but the origin of the wide range and varying directions hydrofrac measurements is still an open question
 - Residual stresses from construction process ?
 - Restraint stresses due to different material properties of salt concrete sealing body and surrounding rock salt?
- From todays knowledge this aspect needs further investigation as permeability of tight and damaged rock salt depends – due to strong hydromechanically coupling - on the effective least principal stress

Müller-Hoeppe 09/2014

17

DBE TEC

DBE TECHNOLOGY GmbH

DBE TEC

DBE TECHNOLOGY GmbH

Acknowledgements

Many thanks

- to my colleagues F. Gläß, R. Mauke, G. Eilers, J. Preuss from BfS for their contributions
- to my colleagues from Asse-GmbH (former HMGU & GSF), IBWa, KUTEC, GMUG, DMT, IfG for their collaboration
- to the BfS for funding the project

DBE TEC

DBE TECHNOLOGY GmbH

18

Müller-Hoeppe 09/2014

DBE TECHNOLOGY GmbH



Thank you
for your attention!

DBE TEC

DBE TECHNOLOGY GmbH

19

Müller-Hoeppe 09/2014

Exceptional service in the national interest

Sandia National Laboratories

September 2014

Summary and open questions of the VSG

Jörg Mönig

Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH
Theodor-Heuss-Str. 4, 38122 Braunschweig, Germany

Sandia National Laboratories
International US/German Workshop
Salt Repository Research, Design, & Operation
Santa Fe, NM

DBE TEC DBE TECHNOLOGY GmbH
Project Management Agency Karlsruhe
PTKA Project Technology Institute of Karlsruhe
ENERGY INSTITUTE OF THE UNIVERSITY OF MUNICH

5th International US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

Preliminary Safety Analysis of the Gorleben Site

GRS

Basics site characterisation and long-term prediction
waste characterization and quantity
safety concept and demonstration concept

Repository design repository concept
repository design and optimisation

System analyses FEP catalogue and scenario development
integrity assessment geol./geotechnical barrier
assessment of RN release scenarios
human intrusion scenarios

Synthesis assessment of results
recommendations

BGR Bundesamt für
Geologie, Rohstoffe
und Rohstoffe
GEOZENTRUM HANNOVER
DBE TEC DBE TECHNOLOGY GmbH
ISTec
KIT
nse international
GOETHE UNIVERSITÄT
UNIVERSITÄT DER
SCIENCE
TU Clausthal

5th US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

Safety and Demonstration Concept

The post-closure safety concept focusses on safe containment

- **Safe containment** describes the status of the repository system in which there is at the most an insignificant release of radionuclides from the containment-providing rock zone (CRZ) during the demonstration period
- An **insignificant release** from the CRZ is a release whose radiological consequences calculated by a biosphere model are below permissible limits and thus pose no risk to subjects of protection





5th US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig





Safety and Demonstration Concept

The post-closure safety concept focusses on safe containment

- **Safe containment** describes the status of the repository system in which there is at the most an insignificant release of radionuclides from the containment-providing rock zone (CRZ) during the demonstration period
- An **insignificant release** from the CRZ is a release whose radiological consequences calculated by a biosphere model are below permissible limits and thus pose no risk to subjects of protection

5th US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

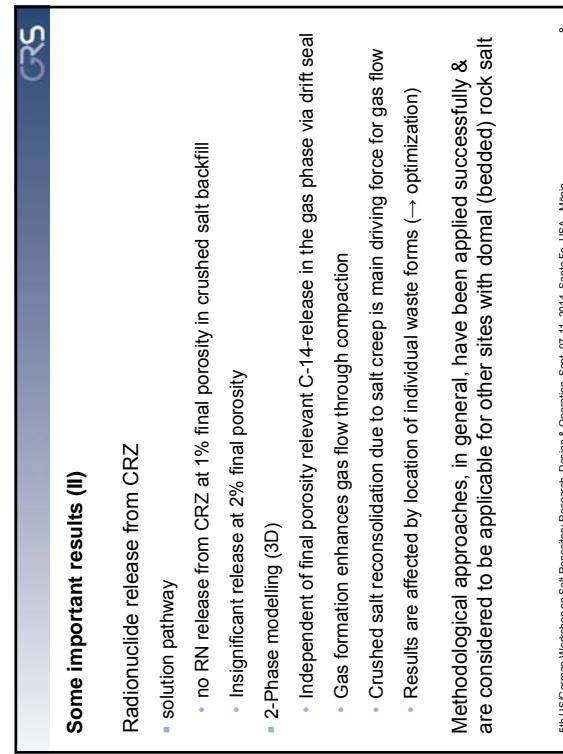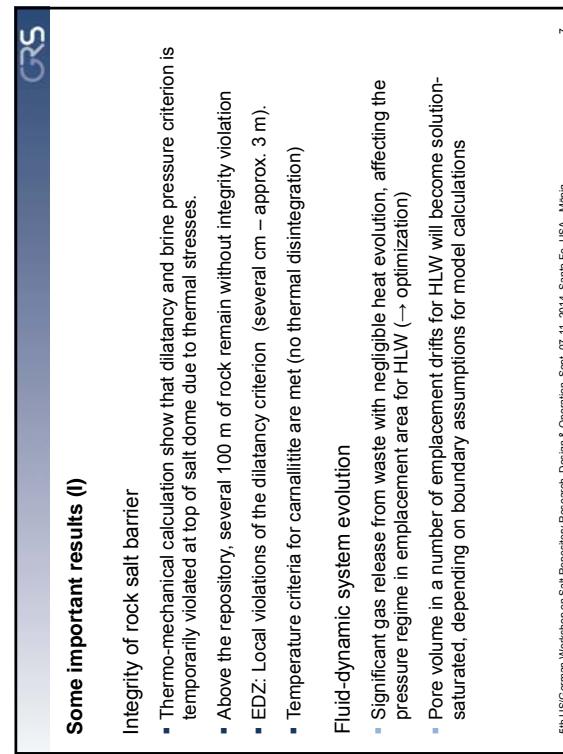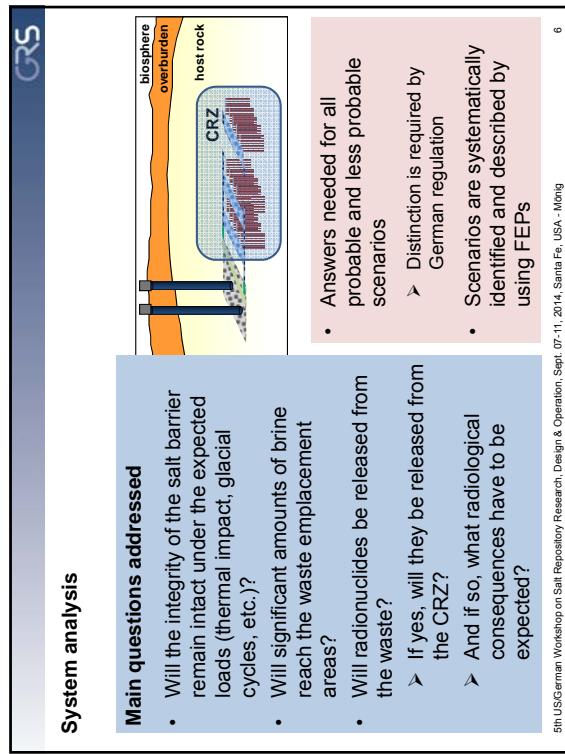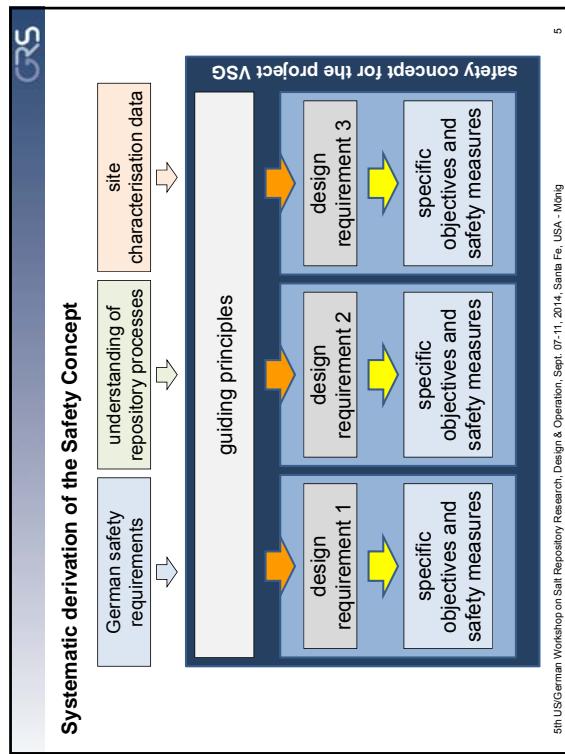

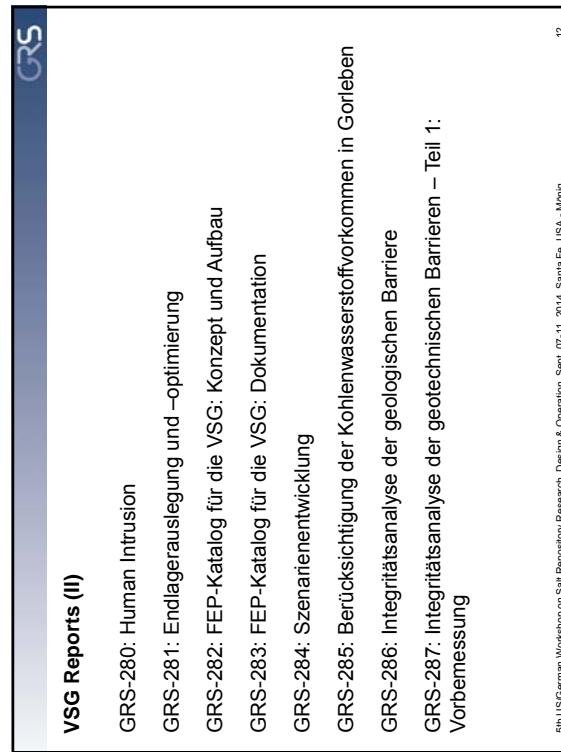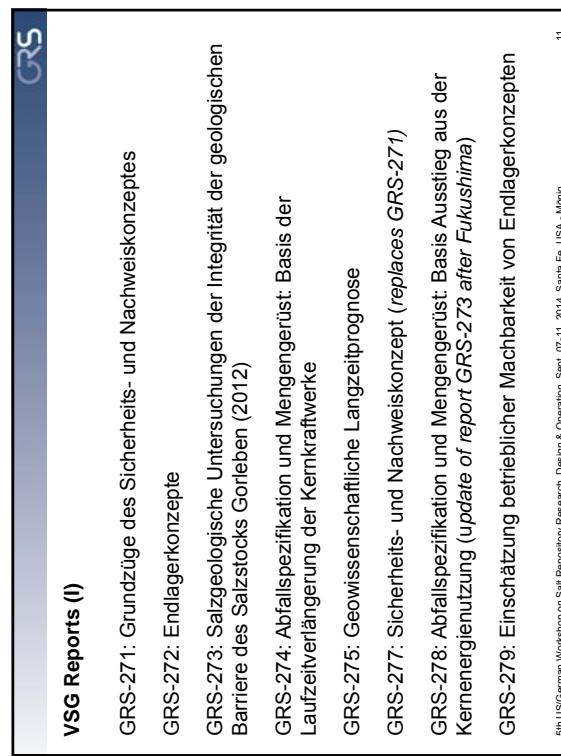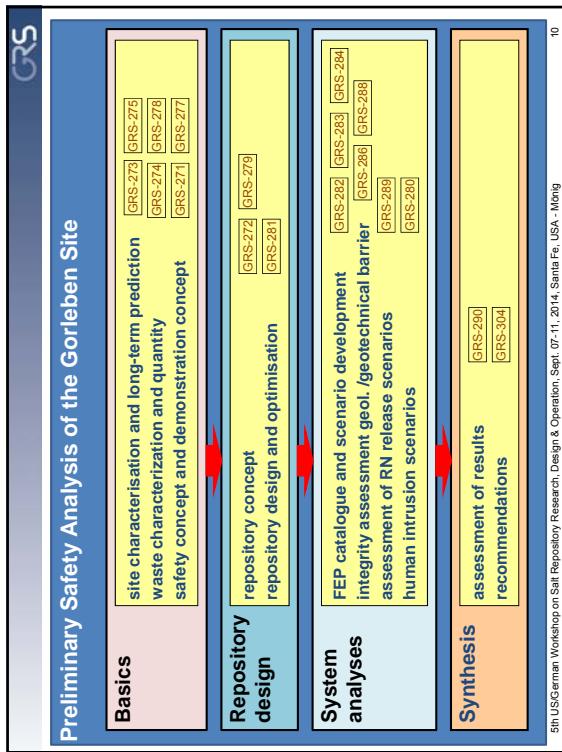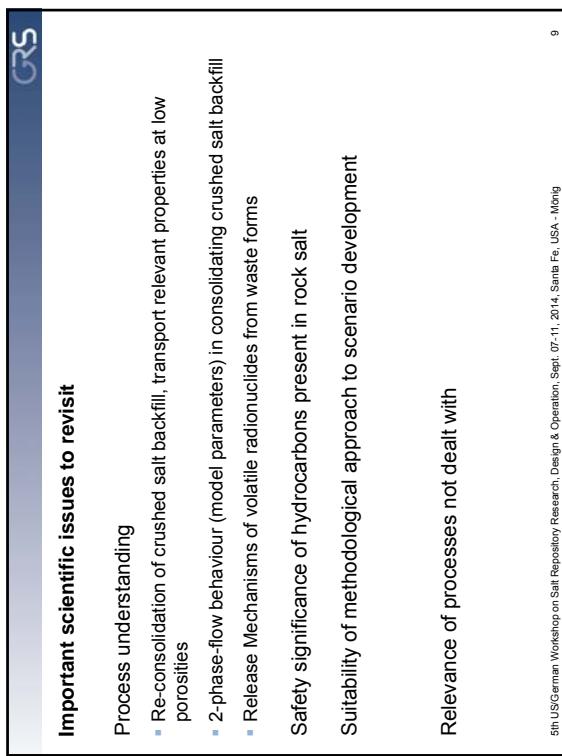

VSG Reports (III)

GRS-288: Integritätsanalyse der geotechnischen Barrieren – Teil 2: Vertiefte Nachweisführung

GRS-289: Radiologische Konsequenzenanalyse

GRS-290: Synthesebericht

GRS-304: Forschungs- und Entwicklungsbedarf auf Basis der Erkenntnisse aus der VSG sowie Empfehlungen

all reports available via: http://www.grs.de/german-publications?page=1&title=%VSG&field_author_value=&field_year_value=&tid_1=&tid>All

Reflections on the ISIBEL Project and Perspectives on Modeling Salt Reconsolidation

R. Chris Camphouse

Sandia National Laboratories[†], Carlsbad, NM, 88220

ABSTRACT

The thrusts of R&D project ISABEL were to summarize the state of the art in high level waste (HLW) disposal in salt and to determine if the demonstration of HLW disposal in salt is technically feasible. The repository concept envisioned in the ISABEL project took full advantage of the favorable properties associated with salt formations, and their benefits in regard to underground waste disposal. The Waste Isolation Pilot Plant (WIPP), located in southeastern New Mexico, has been developed by the U.S. Department of Energy (DOE) for the geologic (deep underground) disposal of transuranic (TRU) waste. U.S. legacy TRU waste is transported to the WIPP facility and interred underground in a bedded salt formation. The bedrock upon which WIPP performance assessment (PA) sits is an understanding of the features, events, and processes (FEPs) that must be considered when quantifying repository performance. From these FEPs, scenarios are developed that represent the state of the repository for undisturbed and disturbed conditions. Numerical models provide responses of the repository over the set of scenarios, where epistemic and aleatory uncertainties are captured through sampling. Results are tabulated and assembled into curves that are then compared to regulatory compliance limits. The safety and demonstration concept developed as part of the ISABEL project has many components in common with those used for the WIPP. As the ISABEL concept provides a framework for a HLW repository in salt, many physical processes important to the ISABEL project are those important to the WIPP project as well. Comparisons are made of the ISABEL and WIPP projects, highlighting areas in which these projects are similar as well as ways they are different.

As part of the ISABEL concept, void volume in emplacement areas and mine workings are to be filled with crushed salt, which will naturally compact due to creep closure of the surrounding salt rock. The ability of the reconsolidated crushed salt to provide sufficient sealing must be demonstrated. Recently, the temporal and physical characteristics of run-of-mine (ROM) salt reconsolidation were investigated as part of a proposed WIPP component design change. The 1998 rulemaking that certified WIPP to receive TRU waste placed conditions on the waste panel closure design to be implemented in the repository. The engineering of the panel closure has been re-assessed, and a revised design has been established that is simpler, cheaper, and easier to construct. It consists of 100 feet of ROM salt with barriers at each end. The ROM salt is generated from ongoing mining operations at the WIPP and may be compacted and/or moistened as it is emplaced in a panel entry. The representation of ROM salt reconsolidation in WIPP PA was a result of an iterative process with the federal regulator, the U.S. Environmental Protection Agency (EPA). The DOE has submitted a planned change request to the EPA, seeking regulatory approval to replace the currently mandated panel closure design with the ROM salt design. The modeling approach used for ROM salt reconsolidation, and insights gained from the regulatory change process, are discussed.

[†] Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. SAND2014-16786A. This research is funded by WIPP programs administered by the Office of Environmental Management (EM) of the U.S Department of Energy.

Exceptional service in the national interest

Sandia National Laboratories

September 2014

Reflections on the ISIBEL Project and Perspectives on Modeling Salt Reconsolidation

R. Chris Camphouse

Sandia National Laboratories

INT'L INTERNATIONAL
US/GERMAN WORKSHOP
Salt Repository Research,
Design, & Operation
Sandia, NM

DBE TEC

Sandia National Laboratories

Project Management Agency Karlsruhe

PTKA

DOE ENERGY

NASA

Sandia National Laboratories is a multiprogram managed and operated by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation for the U.S. Department of Energy's National Nuclear Security Administration under Contract DE-AC04-94ER41232. Sandia has been awarded a contract extension through 2014 to support the U.S. Department of Energy's Nuclear Energy Research Program. This research is funded by WIPP's sponsor and by the Office of Environment, Safety and Emergency Management of the U.S. Department of Energy.


Outline

- ISIBEL and WIPP Common Ground
 - Compare/Contrast the ISIBEL safety demonstration concept and WIPP PA – Methodologies, FEPs, Scenario Development, Uncertainty
 - Discussion of the salt reconsolidation approach taken for a recent WIPP design change – Processes Modeled, Temporal Behavior, Regulator Interactions
 - Conclusions


Common Ground

The ISIBEL repository concept and the WIPP have many common aspects.

- Both are underground waste disposal facilities in salt
- Both repositories have been designed to take advantage of salt properties
- Salt reconsolidation processes are important in ISIBEL (backfilled mine workings) and the WIPP (panel closures)
- WIPP PA is established and in use. ISIBEL safety demonstration capability is drafted with future work defined

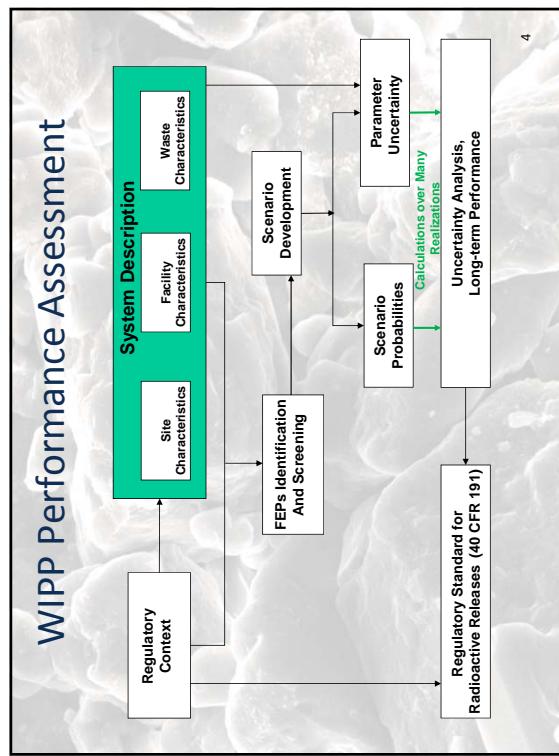

ISIBEL Safety Demonstration Concept

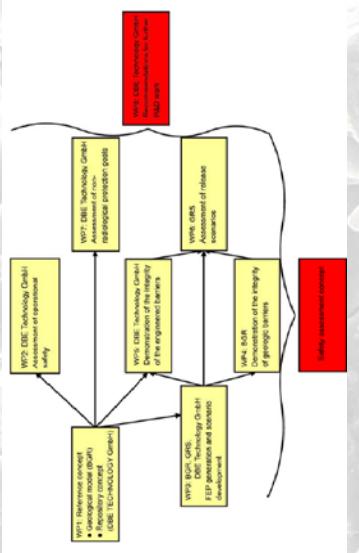

5

Bedrock of WIPP PA and ISIBEL

Fundamental to WIPP PA and the ISIBEL safety demonstration concept are:

- A catalog of the features, events, and processes (FEPs) that must be considered
 - screening process → what needs to be considered and what doesn't
 - Repository scenarios, informed by the set of FEPs, that capture future states of the repository
 - undisturbed and disturbed conditions
 - Proper consideration of uncertainty
 - parameters, models, facility futures

6

FEPS Screening for WIPP

WIPPs are screened according to:

- **Probability:** If a FEP has a probability of occurring less than 10^{-4} in 10,000 years it does not have to be included in PA (e.g., meteorite impact)
 - **Consequence:** If a FEP is beneficial to performance, is not relevant to WIPP or has a insignificant consequence to the disposal system, it does not have to be included in PA (e.g., lakes, tides, floods). If a FEP is related to the WIPP disposal system and/or impacts the repository, it must be accounted for in PA (e.g., chemical effects of corrosion).
 - **Regulation:** Certain FEPs are either screened in or out by regulation (e.g., mining, resource extraction following drilling).
 - 245 FEPs were screened in for the most recent WIPP compliance calculation

8

ISIBEL FEPs

The Gorleben site was used to develop a generic FEP catalog for salt formations.

Iterative approach:

- A comparison with the NEA-FEP database, with an emphasis on salt as the host rock
 - A bottom-up approach identifying all FEPs relevant to the future evolution of the repository
 - A top-down approach identifying FEPs that could play a role in conceivable scenarios
 - FEPs added to represent interdependencies between FEPs found above

7

ISIBEL/VSG Scenario Development

Possible repository futures categorized as probable, less probable, and improbable.

- Binning of futures results in one reference scenario and 17 alternative scenarios
- Reference scenario represents probable repository futures
 - includes climate change (100,000 year cycle), waste heat generation, mobilization and transport, initial barrier integrity
- Alternative scenarios differ in only one aspect from the reference scenario
 - improvised barrier functionality, less probable mobilization and transport, etc.

9

WIPP Scenario Development

- All retained (screened-in) FEPs must be accounted for in WIPP PA in at least one scenario.
- FEPs can be included by explicit modeling or by parameter assignment.
- Expected FEPs are included in all scenarios
 - Creep closure
 - Brine flow, gas generation
- Disruptive FEPs are included in disturbed scenarios.
 - Drilling, mining, brine pocket

10

Uncertainty

Proper representation of uncertainty is vital to WIPP PA and the ISIBEL safety demonstration concept.

- Uncertainties reduced by information gained via site characterization
- Data generated by individual R&D programs can reduce uncertainty and inform parameter distribution assignments
- Uncertainties with regard to future events must be represented
- Uncertainty distributions used for parameter sampling may be iterated with or prescribed by the site regulator

11

WIPP Panel Closure Redesign

The waste panel closure implemented in WIPP has recently been redesigned.

- Current design based on Salado Mass Concrete was mandated by the EPA as part of their 1998 WIPP certification decision
- Redesigned panel closure consists of 100 feet run-of-mine (ROM) salt with barriers at each end – termed the ROMPCS
- Including the ROMPCS in WIPP PA required spatial and temporal modeling of ROM salt reconsolidation
- ROMPCS modeling in WIPP PA was a negotiated process with the EPA – federal rulemaking process

12

ROMPCS Processes

The representation of the ROMPCS in WIPP PA needed to account for several physical processes.

- Creep closure of the surrounding salt rock resulting in consolidation of ROM salt placed in panel entries
- ROM salt comprising the closures approaching a condition similar to intact salt
- Imposed back stress on the surrounding rock resulting in eventual healing of the surrounding salt rock

13

ROMPCS Evolution

The ROMPCS is modeled as having short-term and long-term characteristics in WIPP PA, with properties based on three time periods

- 0 to 100 years: Emplaced ROM salt undergoes some re-consolidation with no impact on surrounding salt rock
- 100 to 200 years: ROMPCS continues to re-consolidate with no impact on surrounding salt rock
- 200 to 10000 years: ROMPCS is re-consolidated and the surrounding salt rock is healed

14

Regulator Interaction

The approval of the ROMPCS design by the EPA regulator is slated to appear in the Federal Register soon.

- Federal rulemaking aspect of design change invoked a lengthy and involved process for the regulator
- Good communication with the EPA was critical in gaining their approval of the new design
- Representation of spatial and temporal ROMPCS behaviors was an iterative process – consensus between EPA and DOE
- Extensive support of EPA verification calculations increased regulator comfort with the new design
- Regulatory comfort in the new design → stakeholder defense

15

Conclusions

- The ISIBEL repository concept and the WIPP have many aspects in common.
 - repositories in salt rock, taking advantage of physical and temporal salt characteristics
- FEPs, repository scenarios, and consideration of uncertainty are fundamental to the WIPP and ISIBEL safety demonstrations.
- The spatial and temporal behaviors of “loose” salt are important to ISIBEL and the WIPP
 - Backfill of mine workings for ISIBEL
 - WIPP panel closures
- Modeling of ROM salt has recently been undertaken, with consensus by the EPA, for a WIPP design change

16

PA Development (PFLOTRAN) and the Safety Case

Glenn Hammond

Sandia National Laboratories

Abstract:

This presentation introduces the massively-parallel, reactive multiphase flow and transport code PFLOTRAN and describes Sandia's recent enhancements to the code that enable its use within nuclear waste repository performance assessment models. Code capability and infrastructure support are briefly outlined followed by a presentation of the conceptual model description and simulation results for a generic salt repository performance assessment model.

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

SAND2014-17007A

Exceptional service in the national interest

PA Development (PFLOTRAN) and the Safety Case

Glenn Hammond
Sandia National Laboratories

September 2014

INTERNATIONAL US/German WORKSHOP
Salt Repository Research, Design, & Operation
Santo, N.M.

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation. It is operated for the National Nuclear Security Administration under Contract DE-AC04-94AL85540. Sandia's U.S. Nuclear Security Missions include:

- DOE's Technology for Nonproliferation and International Security
- DOE's Project Management Agency, Kirtland Air Force Base, NM
- DOE's Defense Waste Processing Facility, West Valley, NY
- DOE's Environmental Restoration and Waste Management Program, Hanford, WA
- DOE's Environmental Restoration and Waste Management Program, Idaho Falls, ID
- DOE's Environmental Restoration and Waste Management Program, Los Alamos, NM
- DOE's Environmental Restoration and Waste Management Program, Oak Ridge, TN
- DOE's Environmental Restoration and Waste Management Program, Richland, WA
- DOE's Environmental Restoration and Waste Management Program, Savannah River Site, SC
- DOE's Environmental Restoration and Waste Management Program, Yucca Mountain, NV

DBETEC DBETEC Technology GmbH



PTKA Project Management Agency, Kirtland Air Force Base, NM

NASA NASA

DOE U.S. Department of Energy

PFLOTRAN

- Petascale reactive multiphase flow and transport code
- Open source license (GNU GPL 2.0)
- Object-oriented Fortran 9X/2003/2008
- Pointers to procedures
- Classes (extendable derived types with member procedures)
- Founded upon PETSc parallel framework
- Parallel communication through MPI
- Parallel I/O through binary HDF5
- Unstructured domain decomposition through METIS/ParMETIS (Cmake)
- Demonstrated performance
- Maximum # processor cores: 262,144 (Jaguar supercomputer)
- Maximum problem size 3.34 billion degrees of freedom
- Scales to over 10K cores

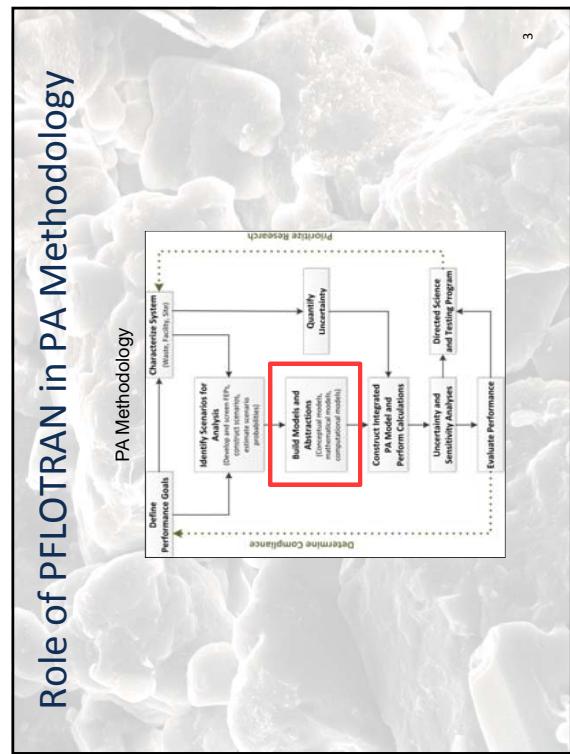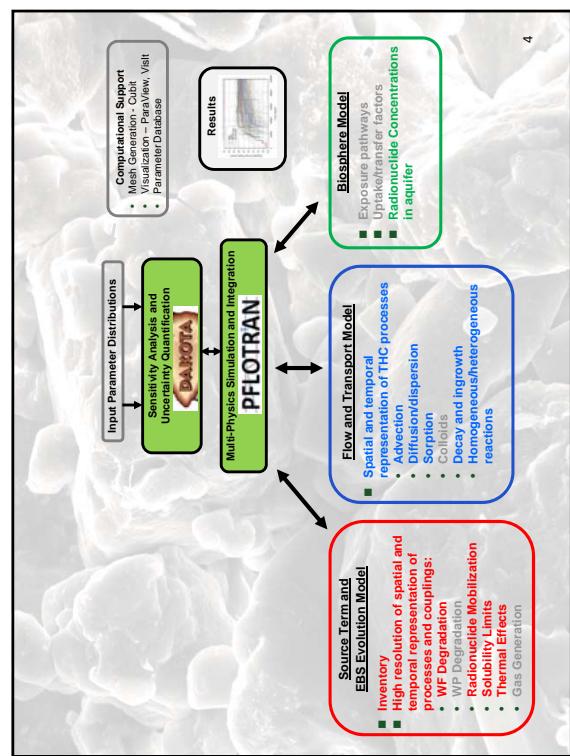

PFLOTRAN Multi-Physics Capabilities

- Flow
 - Multiphase gas-liquid
 - Interchangeable constitutive models and equations of state
- Energy
 - Thermal conduction and convection
- Multi-Component Transport
 - Advection, hydrodynamic dispersion
- Geochemical Reaction
 - Aqueous speciation (ion activity models)
 - Mineral precipitation-dissolution
 - Surface complexation, ion exchange, isotherm-based sorption
 - Radioactive decay with daughter products

Hammond and Lichner, WRR, 2010

5

PFLOTRAN Computing Capabilities

- High-Performance Computing (HPC)
 - Increasingly mechanistic process models
 - Highly-refined 3D discretizations
 - Massive probabilistic runs
- Open Source Collaboration
 - Leverages a diverse scientific community
 - Sharing among subject matter experts and stakeholders from labs/universities
- Modern Fortran (2003/2008)
 - Domain scientists remain engaged
 - Modular framework for customization
- Leverages Existing Capabilities
 - Meshing, visualization, HPC solvers, etc.
 - Configuration management and QA

Data Assimilation

Buildbot

6

PFLOTRAN Support Infrastructure

- **Mercurial:** distributed source control management tool
- **Bitbucket:** online PFLOTRAN repository
 - hg clone <https://bitbucket.org/pflotran/pflotran-dev>
- Source tree
- Commit logs
- Wiki
 - Installation instructions
 - Quick Guide
 - FAQ (entries motivated by questions on mailing list)
- Change requests
- Issue tracker
- **Google Analytics:** tracks behavior on Bitbucket Site over past year
- **Buildbot:** automated building and testing (regression and unit)
- **Google Groups:** pflotran-users and pflotran-dev mailing lists

PFLOTRAN Verification




- Test cases for WIPP codes (BRAGFLO and NUTS) set up and executed with PFLOTRAN
 - E.g., BRAGFLO Case #8
 - "Well production at a specified bottom hole pressure"
-
- HeeHo Park, SNL B211, Carlsbad, NM
- 8

Generic Salt Repository PA Model – Simulation Summary


- DAKOTA / PFLOTTRAN simulations:**
 - Deterministic PA simulation with mean values
 - 100-realization probabilistic simulation with 10 sampled parameters
 - Deterministic thermal simulation
 - Run on SNL Red Sky HPC cluster
 - Nested parallelism
 - Many concurrent realizations
 - Each realization distributed across many processors

• Total nodes: 2,816 nodes / 22,528 cores
• 505 Teraflops peak

Payton Gardner, SNL 6224, Albuquerque NM

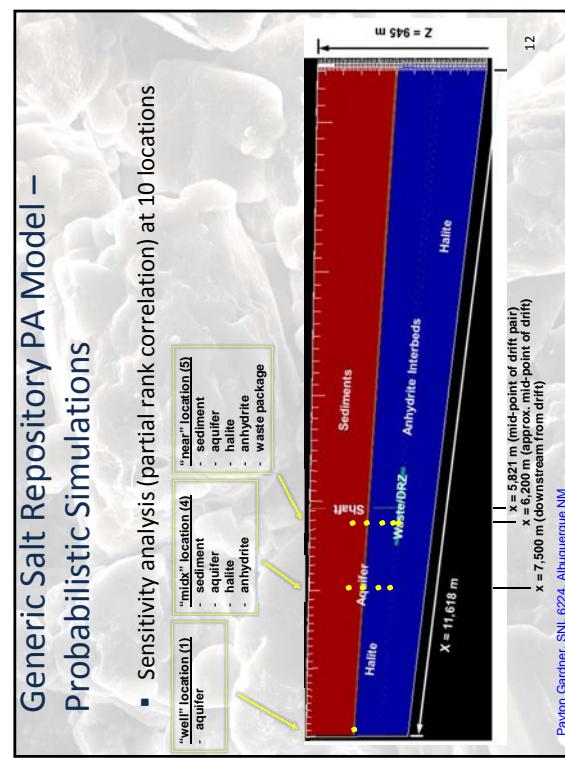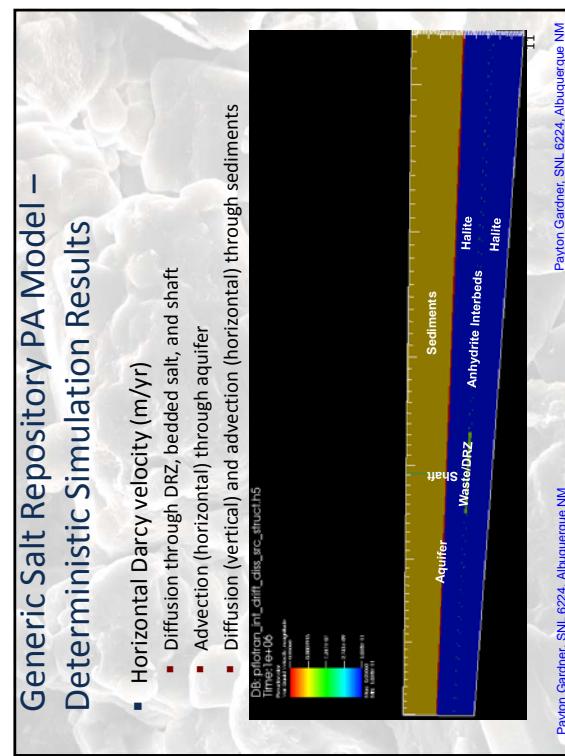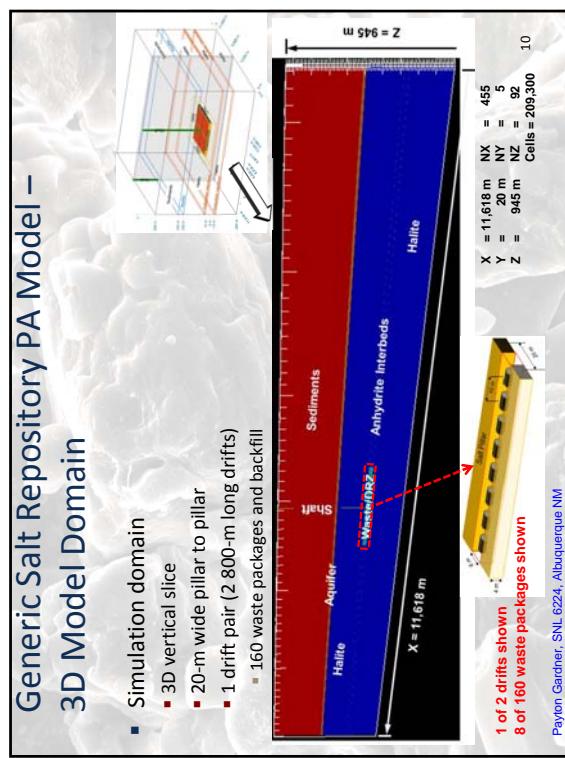


Generic Salt Repository PA Model – Multi-Realization Analysis

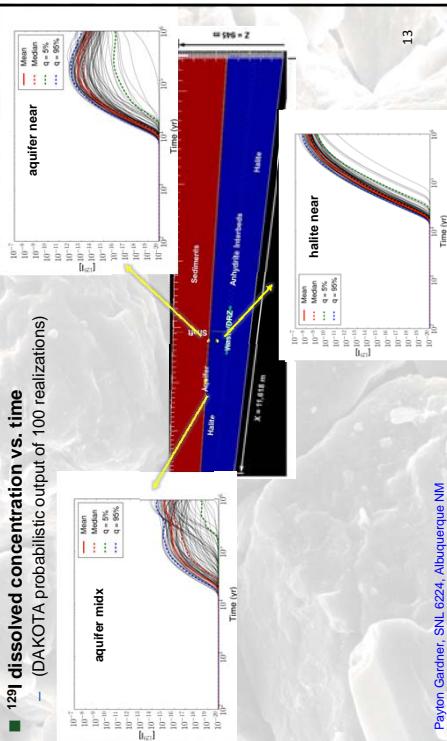

Payton Gardner, SNL 6224, Albuquerque NM

Future Directions – Coupled Radionuclide Mobilization and Transport Processes

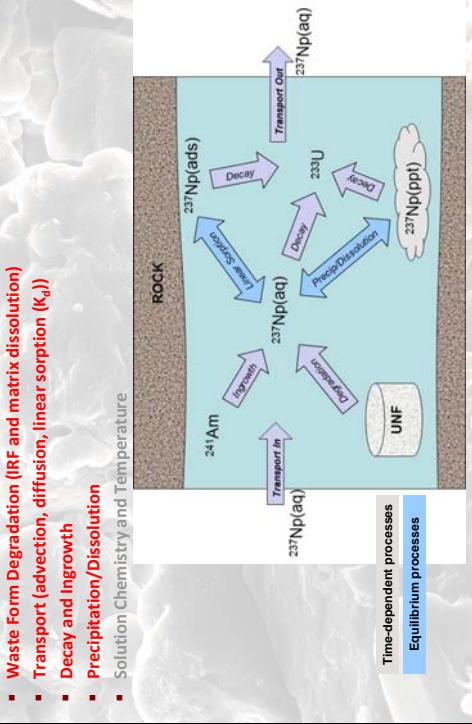

Visualization Tool VIRTUS

Klaus Wieczorek*, Steffen Masik**, Joachim Behlau***, Christian Mueller****

*Gesellschaft fuer Anlagen- und Reaktorsicherheit (GRS) mbH, Germany

**Fraunhofer Institut fuer Fabrikbetrieb und –automatisierung, Germany

***Federal Institute for Geosciences and Natural Resources (BGR), Germany

****DBE TECHNOLOGY GmbH, Germany

VIRTUS is a “virtual underground laboratory” which can illustrate repository concepts, geologic situations and physical processes taking place in an underground lab or a repository. It centrally provides the necessary consolidated data (geologic models, mine structures, material data for numerical simulation) as well as means for the integrated visualization and evaluation of various types of information.

VIRTUS consists of a visualization software platform, material database and interfaces to CAD programs like BGR's openGEO which provide geologic models and to process level codes (PLC) for numerical model simulations. A “hot spot” system allows easy access to all available information.

Geologic models are imported into VIRTUS, powerful editing functions allow the creation of mine structures. The resulting combined models can be exported to PLC pre-processors, where they are used as input for model calculations on the coupled thermal-hydraulic-mechanical behavior of the system consisting of waste, technical components and rock formation. The simulation results can be visualized in VIRTUS in context with the underlying geology.

The above features have been implemented. Testing and improvement are continuously performed.

Three demonstration experiments have been defined for prototypical simulation by the partners using their individual PLCs:

- An isothermal mechanical simulation of a drift passing through different types of rock (BGR: JIFE)
- A thermal simulation of an array of emplacement boreholes (DBE TEC: FLAC^{3D})
- A coupled thermal-mechanical simulation of a heated drift in rock salt approaching a potash layer and anhydrite blocks (GRS: CODE_BRIGHT)

The geometrical models have been extracted from VIRTUS and the simulations are underway.

For a given repository or underground laboratory site, the capabilities of VIRTUS can help to facilitate design of meaningful experiments, to prepare benchmark exercises or simulation variants for optimization and compare their results, to evaluate simulation results to make sure that safety criteria are met, to design actual repository structures in a given geology, and to present repository research to the public.

VIRTUS has been developed in the frame of a joint project of the Gesellschaft für Anlagen- und Reaktorsicherheit (GRS), the Federal Institute for Geosciences and Natural Resources (BGR), the DBE TECHNOLOGY GmbH (DBE TEC), and the Fraunhofer Institut für Fabrikbetrieb und –automatisierung (IFF). The VIRTUS project is financed by the Federal Ministry of Economics and Technology (BMWi) under contract 02E10890. The current phase of VIRTUS is ending in October 2014.

What is VIRTUS?

Visualization Tool VIRTUS

Klaus Wiecezorek, Steffen Masik,
Joachim Behlau, Christian Müller


5th US/German Workshop on Salt Repository Research, Design, and Operation
Santa Fé, September 7-11, 2014

A joint project of



Concept of the “Virtual URL”

Components:



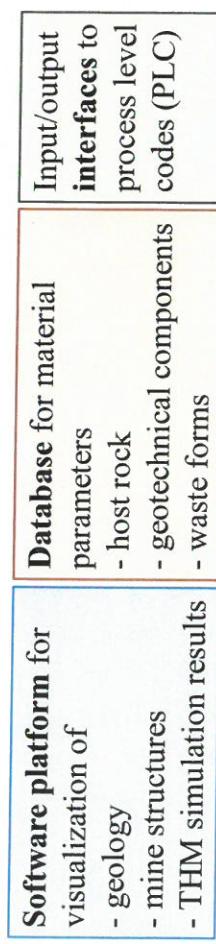


Features:

- Provides combined view of URL or repository structure & processes
- Makes available consolidated data on material behavior
- Easy access to all information via “hot spots”




VIRTUS Data Exchange

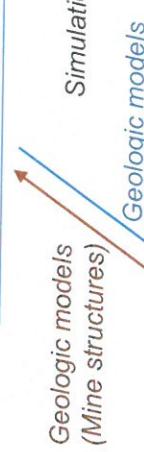

VIRTUS Functionality & Workflow

Import, check, and processing of the geologic model

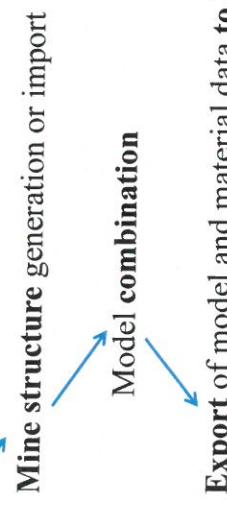

FE mesh generation and PLC simulation (outside VIRTUS)


Import and Visualization of simulation results



Santa Fe, September 7-11, 2014

Geology: Virtual Salt Anticline

- VIRTUS site: a synthetic geologic model

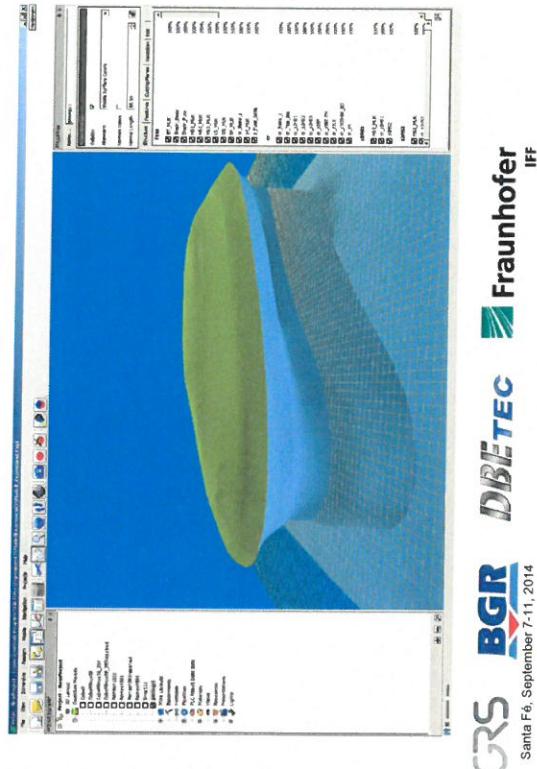

Geology: Virtual Salt Anticline


- Geologic surface model needs to meet several requirements to be used by PLC mesh generators
 - Closeness of each geologic body
 - Exclusion of interpenetration of geologic bodies
 - Area ration of large and small surface triangles
 - Balance of inner angles of the surface triangles
- Automatic processing is required
 - Removal of zero-area triangles
 - Rectification of surface normals (visualization improvement)
 - Surface mesh simplification and regularization



Santa Fe, September 7-11, 2014


Geology: Geometry Processing

- Geologic surface model needs to meet requirements to be used in mine models
 - Closeness of each

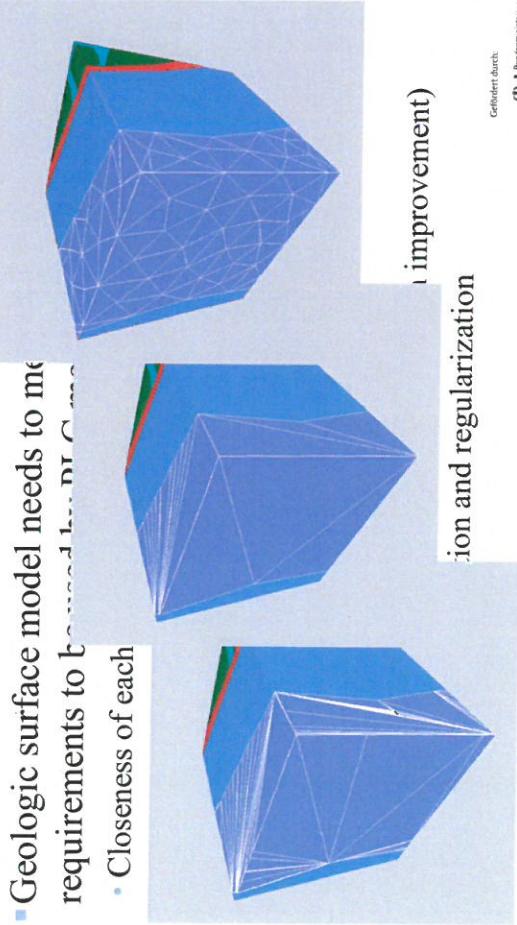

GRS **BGR** **DBE**_{TEC} **Fraunhofer**
IFF
Santa Fe, September 7-11, 2014


Mine Structure

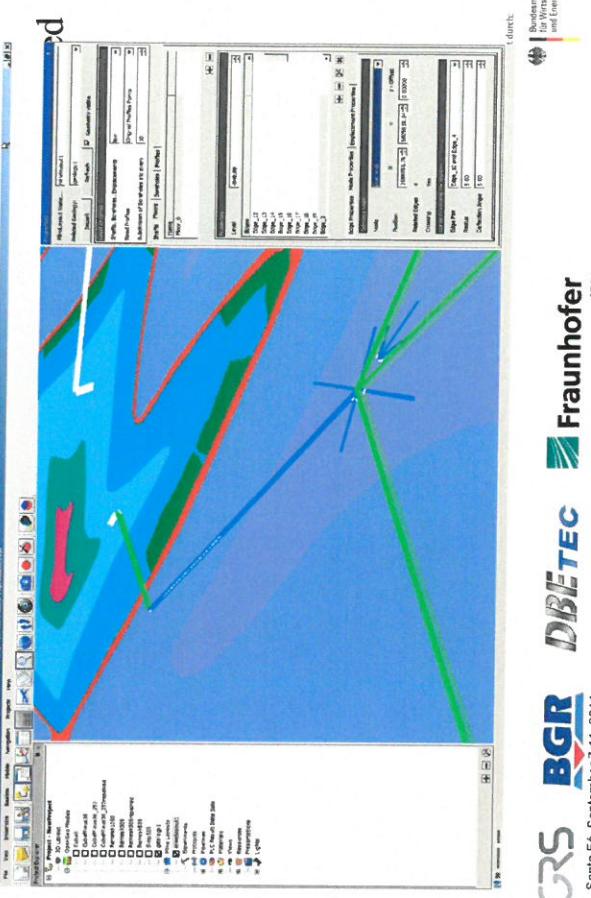

Geleitet durch:
Bundesnetzamt
für Wirtschaft
und Energie
aufgrund eines Beschusses
des Deutschen Bundestages

Geleitet durch:
Bundesnetzamt
für Wirtschaft
und Energie
aufgrund eines Beschusses
des Deutschen Bundestages

Mine Structure

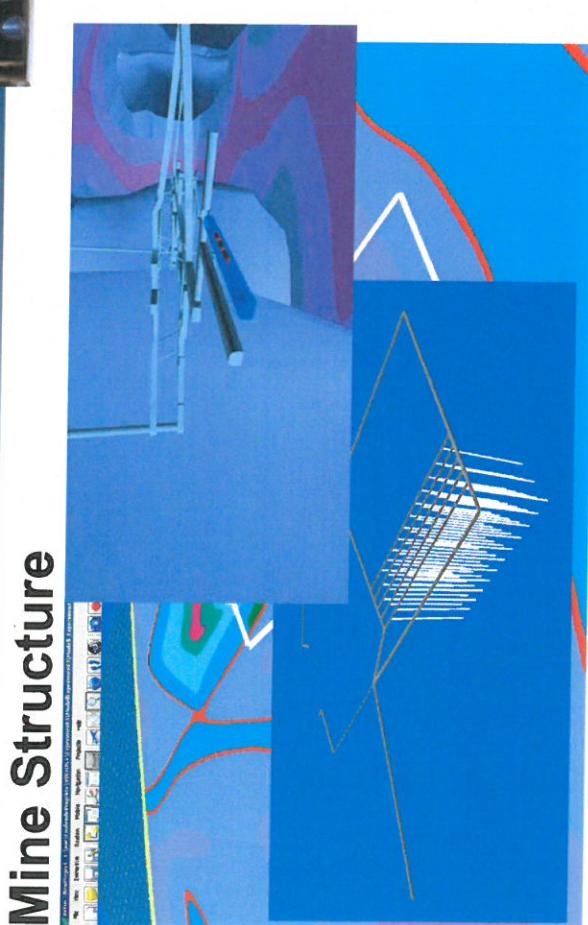

Geleitet durch:
Bundesnetzamt
für Wirtschaft
und Energie
aufgrund eines Beschusses
des Deutschen Bundestages

Combination of Geology and Mine

- From the separate geometric models of geology and mine structure, a combined surface model is created




Geleitet durch:
Bundesnetzamt
für Wirtschaft
und Energie
aufgrund eines Beschusses
des Deutschen Bundestages

Geleitet durch:
Bundesnetzamt
für Wirtschaft
und Energie
aufgrund eines Beschusses
des Deutschen Bundestages

GRS **BGR** **DBE**_{TEC} **Fraunhofer**
IFF
Santa Fe, September 7-11, 2014


Export to PLC and Meshing

- Cuboid sections from the combined model can be freely defined for export (various formats available)
- FE meshing by PLC pre-processors

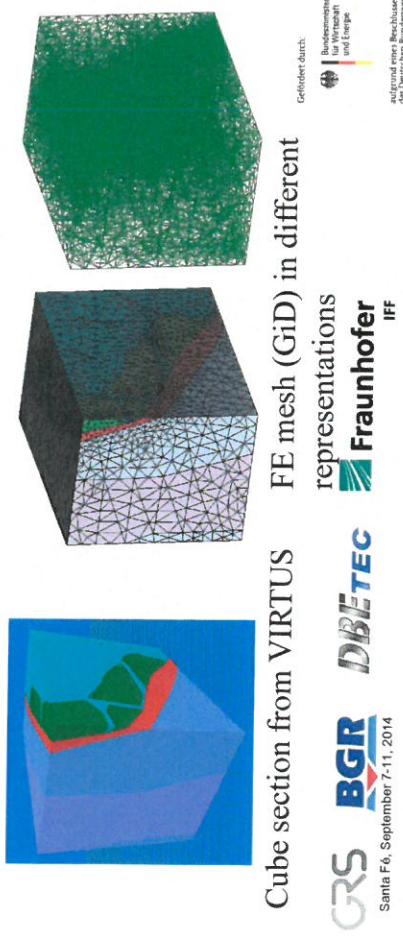

PLC Simulation

- PLC simulation of 3 demonstration experiments

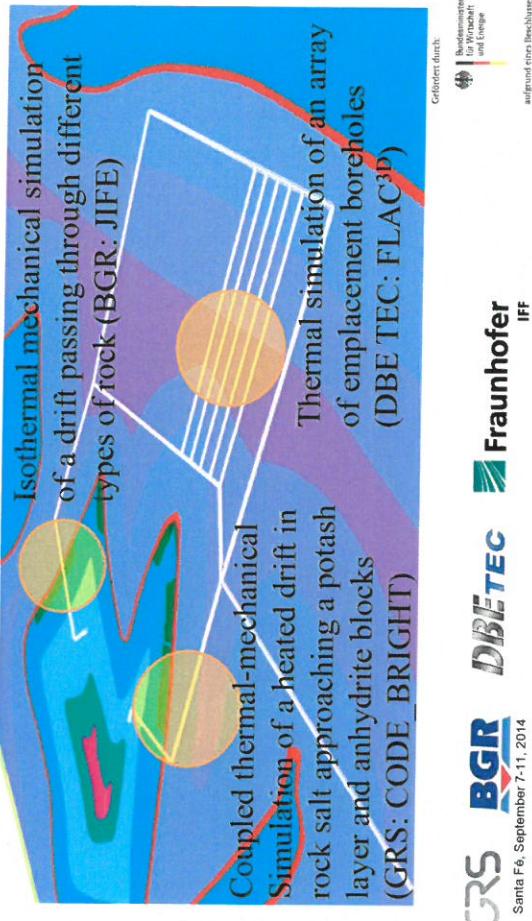

Result Import and Visualization

- Thermal data: temperature and heat flow
- Hydraulic data: fluid pressure, flow rates, saturation
- Mechanical data: stress, deformation, porosity

Result data can be

- Scalars (temperature, porosity,...)
- Vectors (heat flow, deformation,...)
- Tensors (stress, strain,...)




Visualization: Scalar


- Temperatur field of a drift charged with 20 POLLUX containers 200 years after emplacement (red: 50°C iso-surface)



Horizontal section in the plane of the containers: temperature field

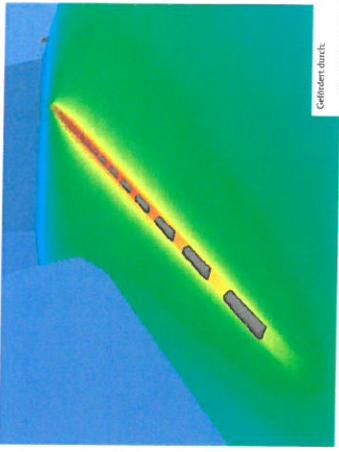


Visualization: Vector

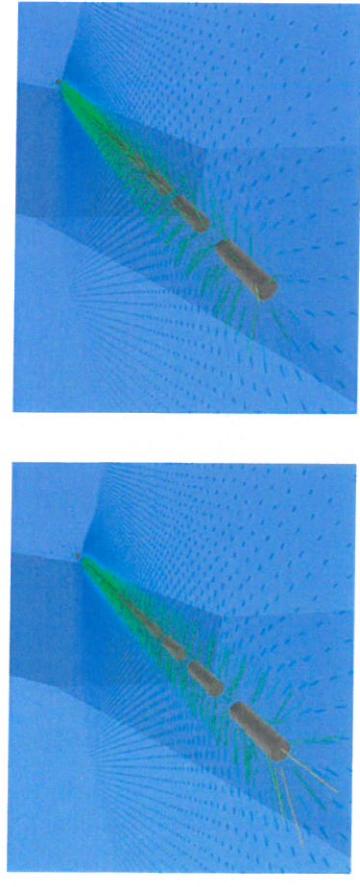

Heat flow in horizontal section:
in container mid-plane (left) - above container plane (right)

Benefits from a Virtual URL

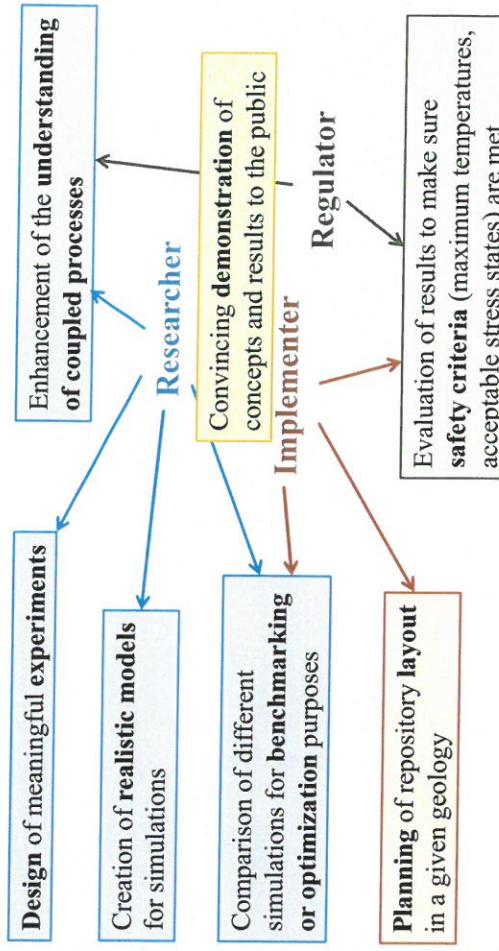

VIRTUS Project Partners

GRS Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH

- Project management, database (with IFF)

BGR Federal Institute for Geosciences and Natural Resources (BGR)

- Geologic models

DBE Technology GmbH

- Mine layout

GRS/BGR/DBE TEC: Material data evaluation, PLC simulation
Fraunhofer Institut fuer Fabrikbetrieb und -automatisierung
(Contractor)

- Software platform
- Visualization

GRS Santa Fe, September 7-11, 2014

Geöffnet durch:
Bundesministerium
für Wirtschaft
und Energie
aufgrund eines Beschleuniger-
des Deutschen Bundesamtes

BGR | Bundesamt für
Wirtschaft
und Energie
aufgrund eines Beschleuniger-
des Deutschen Bundesamtes

DBE TEC **Fraunhofer**
IFF

Santa Fe, September 7-11, 2014

Status and Prospects

- The current phase of the VIRTUS project is ending in October 2014
- The VIRTUS features presented are implemented (testing and improvement is continuing)
- Simulation of three prototypical experiments is continuing
- Tools for model and result evaluation and comparison have not yet been implemented
- VIRTUS has been developed as a virtual URL in salt, but is highly flexible. Little effort is needed to use it with other geologies or other process level codes

Geöffnet durch:
Bundesministerium
für Wirtschaft
und Energie
aufgrund eines Beschleuniger-
des Deutschen Bundesamtes

BGR | Bundesamt für
Wirtschaft
und Energie
aufgrund eines Beschleuniger-
des Deutschen Bundesamtes

DBE TEC **Fraunhofer**
IFF

Santa Fe, September 7-11, 2014

Features, Events, and Processes (FEPs) Development Activities

Geoff Freeze¹and Jens Wolf²

¹Sandia National Laboratories, Albuquerque, NM, USA

²Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH,
Braunschweig, Germany

Abstract

Feature, event, and process (FEP) analysis and scenario development are an integral part of the iterative performance assessment (PA) process, and are used to inform the construction of post-closure PA models of SNF/HLW repositories. Uncertainty and sensitivity analyses of the results produced by those PA models indicate which FEPs are most important to post-closure repository performance. This information is then used in the next iteration to help refine the set of FEPs and scenarios, and their representation in the PA model.

FEPs have traditionally been organized using a classification scheme developed as part of Nuclear Energy Agency (NEA) International FEP Database. The NEA FEP database uses a hierarchical numbering and classification scheme that is based on two overlapping sets of categories: features (e.g., waste form, waste package, backfill, host rock, etc.) and multi-physics processes (e.g., thermal, chemical, mechanical, hydrologic). The categories are overlapping in the sense that a specific FEP (e.g., flow through the waste package) may be classified both by a feature category (e.g., waste package) and by a process category (e.g., hydrologic). As a result, related FEPs are not always mapped to the same category and it can be difficult to group and/or find all related FEPs within the FEP list. In addition, the overlapping categories sometimes lead to the creation of the same or similar FEPs under different headings.

To better inform PA modeling and safety case development, a new FEP organizational structure, the FEP classification matrix, has been developed that alleviates the issues associated with the overlapping categories and duplicative FEPs in the NEA-based classification scheme. The FEP classification matrix is based on the concept that a FEP is typically a process or event acting upon or within a feature. The FEP matrix provides a two-dimensional organizational structure consisting of a Features axis that defines the “rows” and a Processes/Events axis that defines the “columns”.

The FEP matrix approach is being applied to develop a comprehensive set of FEPs for a generic salt repository, based on the FEP experience and work carried out in the US and Germany. The ultimate goal is to populate an international FEP database for salt repositories that can promote easy searching for FEPs and pertinent information. The populated FEP matrix can be a useful tool for developing a PA model and a robust Safety Case in salt repositories.

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. SAND2014-17016A

Features, Events, and Processes (FEPs) Development Activities

Geoff Freeze (SNL)
Jens Wolf (GRS)

September 2014

INTERNATIONAL US/German Workshop
Salt Repository Research, Design, & Operation
Sandia, NM

SANDIA NATIONAL LABORATORIES
U.S. Department of Energy
National Nuclear Security Administration
Project Management Agency, Karlsruhe

DBE TEC
DBE Technology GmbH

PTKA
Project Management Agency Karlsruhe

DOE/NASA
U.S. Department of Energy
National Aeronautics and Space Administration

Sandia National Laboratories is a multiprogram laboratory managed and operated by Sandia Corporation, a wholly-owned subsidiary of Lockheed Martin Corporation for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. SANDIA IS A TRADE NAME.

Outline

GRS Saarländische
National
Laboratories

- Joint U.S.-German Objectives / Motivation
 - SNL: Geoff Freeze, S. David Sevougan, Michael Gross, Christi Leigh
 - DOE Used Fuel Disposition (UFD) Campaign
 - GRS: Jens Wolf, Jörg Möhig, Dieter Bühmann
 - Vorläufige Sicherheitsanalyse Gorleben (VSG)
- Collaborative Results to Date
 - FEP Matrix and Documentation Template
 - New FEPs: bedded salt vs. domal salt FEPs
 - Future Work

2

Objectives / Motivation

GRS Saarländische
National
Laboratories

- U.S. – German collaboration to produce a common FEP list
 - Identify relevant FEPs for disposal of heat-generating waste (SNF and HLW) in salt
 - Applicable to all potential salt concepts and sites
 - Refine existing FEP identification and screening approaches
- Salt Club
 - Produce a FEP Catalogue for use by all NEA Salt Club members
 - Countries with potential interest in salt repositories
 - Documentation of screening decisions
 - Inform the pending update to the NEA International FEP database

FEP Analysis

GRS Saarländische
National
Laboratories

- A **FEP** is a Process or Event acting upon or within Feature(s)
- **FEP Identification**
 - Develop and classify a comprehensive list of FEPs potentially relevant to long-term repository performance
- **FEP Screening**
 - Specify a subset of important FEPs that individually, or in combination, that contribute to long-term repository performance
- **Scenario Development and Screening**
 - Identify and screen scenarios (i.e., combinations/sequences of FEPs)
 - Nominal/reference, disruptive

Salt FEP Identification	
Characteristics, Processes, and Events	Features
▪ US: ~200 UFD Bedded Salt FEPs (Sevougian et al. 2012)	
▪ Modified from generic FEPs (Freeze et al. 2011) to be more salt-specific	
▪ Derived from NEA FEP Database (1999, 2006)	
▪ Cross-checked against WIPP FEP catalogue (DOE 2009)	
▪ Germany: ~100 Gorleben VSG FEPs (Wolf et al. 2012a,b)	
▪ Derived from NEA FEP Database (1999, 2006)	
▪ Specific to a salt dome in Northern Germany	
▪ Combined as part of “FEP Matrix” approach (Freeze et al. 2014a,b)	
▪ Initial US and German FEPs mapped to FEP Matrix to eliminate redundancies	
▪ 5 example matrix-based FEPs created to test approach	

FEP Matrix	
Characteristics, Processes, and Events	Features
▪ All FEPs relevant to the Buffer/Backfill “feature”	
▪ Some are broadly applicable to both	
▪ Some are specific to the Buffer “component” or Backfill “component”	
▪ All Thermal-Mechanical FEPs relevant to Buffer/Backfill and Emplacement Tunnels/Drifts	

FEP Matrix	
Characteristics, Processes, and Events	Features
▪ Two-dimensional FEP organizational structure	
▪ Matrix Rows = Feature (and component) Categories	
▪ Matrix Columns = Process and Event Categories	
▪ Matrix Cell contains all FEPs related to the “Process/Event” acting upon or within the “Feature”	
▪ Related FEPs are grouped by Matrix Cell (or by Row or Column)	
▪ Not distributed among various locations as in the NEA-based hierarchical list	

FEP Matrix	
Characteristics, Processes, and Events	Features
▪ Characteristic FEPs	
▪ FEPs containing properties and parameter values that describe a feature or component	
▪ Only one Characteristic FEP per feature/component	
▪ No screening for Characteristic FEPs	

7

8

FEP Identification Scheme

FF.CC.PE.nn

- Developed a “numbering” scheme consistent with FEP Matrix
 - Alpha-numeric identifiers indicate where a FEP is mapped in the FEP matrix (e.g., row and column)
 - More descriptive than strictly numeric identifiers
 - Can still be mapped to NEA Database FEP Numbers for traceability
- FEP matrix identifiers have the form: **FF.CC.PE.nn**

where:

- FF** = Feature
- CC** = Component (sub-feature)
- PE** = Process or Event category
- nn = sequential tracking number

9

10

FEP Identification Scheme

FF.CC.PE.nn

- FF = Features:
 - Waste Form:
 - Waste Package:
 - Buffer/Backfill:
 - Mine Workings:
 - Seals/Plugs:
 - Host Rock:
 - Other Geologic Units:
 - Biosphere
 - Repository System
- CC = Components:
 - Feature-level:
 - Component-level (e.g. buffer, backfill, ...): 01, 02, 03, ...

11

12

FEP Identification Scheme

FF.CC.PE.nn

PE = Process or Event category:

- Characteristics:
 - Mechanical and thermal-mechanical processes:
 - Hydrological and thermal-hydrological processes:
 - Chemical and thermal-chemical processes:
 - Biological and thermal-biological processes:
 - Transport and thermal-transport processes:
 - Thermal:
 - Radiological:
 - Long-Term Geologic:
 - Climatic:
 - Human Activities (Processes):
 - Other (Processes):
 - Nuclear Criticality:
 - Early Failure:
 - Seismic:
 - Igneous:
 - Human Activities (Events):
 - Other (Events):

11

FEP Documentation Template

FF.CC.PE.nn

0. FEP Name and Identifier
1. Definition
2. Description and Related FEPs
 - FEP Description may subdivide into “sub-parts” A, B, C, etc.
- 2.1 General
- 2.2 Concept Specific (e.g., bedded salt vs. domal salt)
- 2.3 Properties and Parameter Values
- 2.4 Related FEPs
3. Screening Decision (by sub-part)
4. Screening Justification (by sub-part)
5. Open Issues
6. References

12

FEP Documentation Template	
	GRS Siedlungs- National- Laboratories
0. FEP Name and Identifier	
1. Definition	
2. Description and Related FEPs	
▪ FEP Description may subdivide into “sub-parts” A, B, C, etc.	
2.1. General	
2.2 Concept Specific (e.g., bedded salt vs. domal salt)	
2.3 Properties and Parameter Values	
2.4 Related FEPs	
3. Screening Decision (by sub-part)	
4. Screening Justification (by sub-part)	
5. Open Issues	
6. References	

13

Matrix-Based FEPs – Issues for Bedded vs. Domal Salt	
▪ Filling in the whole matrix with fully described FEPs needs a lot of resources	
▪ “Product” for Salt Club	
▪ Both countries are in a site selection process	
▪ Develop new example matrix-based FEPs that highlight areas where there are differences between bedded salt and domal salt	
▪ Improve template regarding screening decisions and screening justifications	

14

Example Matrix-Based FEP	
Characteristics, Processes, and Events	GRS Siedlungs- National- Laboratories
Features	
▪ Buffer/Backfill	
▪ Waste or Reuse Buffer	
▪ Tunnel Backfill	
▪ Enrichment Tunnels/Drifts and Laminations	
▪ Open Excavations	
▪ Tunnel Drift Support	
▪ Others	


15

Screening decisions	
▪ Included – FEP is almost certain to be included, independent of the type of salt site or specific site characteristics.	
▪ Excluded – FEP that is almost certain to be screened, independent of the specific salt site	
▪ Site-Specific – FEP requires a substantial amount of detailed information for a specific site evaluation	
▪ Design-Specific – FEP requires detailed information for a specific repository design.	
▪ Evaluate – FEPs are candidates for quantitative sensitivity analyses	

16

Example Matrix-Based FEP		
▪ BB.02.TM.01 – Mechanical effects on Backfill or from Backfill		
ID	Description of Process	Screening Decision
A	Compaction or Reconsolidation of Backfill (A ₁) An eventual moisture content in backfill may increase the convergence rates (A ₂) Internal pressure in a segment influences the convergence process	Included Included
B	Back-Stress from Backfill (B ₁) The presence of backfill will generate mechanical loads on the drift walls, slowing convergences of the drifts. (B ₂) The presence of backfill will generate mechanical loads on drift and borehole liners, and on the waste packages if the packages are placed directly on the floor of the emplacement drifts or short boreholes in the floor or ribs of a drift.	Evaluate Likely Excluded
C	Non-Thermally-Induced Volume Changes (C ₁) Crushing of corrosion products (C ₂) Swelling of backfill grains	Likely Excluded Evaluate
D	Roof Collapse	Likely Excluded

17

Matrix-Based FEPs – Issues for Bedded vs. Domal Salt		
 GRS Sächsische Staats- und Nationale Laboratorien		
WIPP Gorleben	Geology	Repository Concept / Design
Regulations		
		
		
		18

Matrix-Based FEPs – Issues for Bedded vs. Domal Salt		
 GRS Sächsische Staats- und Nationale Laboratorien		
▪ 13 new example FEPs		
HR.01.CP.01	Stratigraphy and Properties of Bedded and Domal Salt	
HR.02.CP.01	Stratigraphy and Properties of Disturbed Rock Zone	
HR.03.CP.01	Stratigraphy and Properties of Interbeds and Seams	
RS.00.CP.01	Repository Design	
WP.00.TC.01	Gas Generation at Waste Packages	
MW.00.TH.01	Gas Generation in Emplacement Drifts	
MW.00.HE.01	Human Intrusion into the Emplacement Drifts	
SP.02.TM.01	Mechanical Effects on Shaft Sealing	
HR.02.TM.01	Evolution of the DRZ	
HR.00.OP.01	Alteration and Evolution of Flow Pathways in Host Rock	
HR.00.TM.01	Mechanical Effects on Host Rock	
HR.00.TT.01	Advection of Dissolved Radionuclides in Host Rock	
HR.00.TT.02	Diffusion/Dispersion of Dissolved Radionuclides in Host Rock	
		19

Example Matrix-Based FEP		
 GRS Sächsische Staats- und Nationale Laboratorien		
▪ HR.00.TT.01 Advection of Dissolved Radionuclides in Host Rock		
ID	Description of Process	Screening Decision
A	Advection of Dissolved Radionuclides	Included
B	Transport Through Fractures	Included
C	Channelling Flow	Likely Excluded
D	Viscous Fingering	Excluded
		20

Future Work

GRS | Siedlungs- und National-
Forschungslabore der
Bundesrepublik Deutschland

- Salt FEP Catalogue
 - FEP identification and documentation ongoing
 - Joint U.S.-German collaboration
 - Preamble completed
 - Focus on FEPs where there are differences between bedded and domal salt → Salt Club report
 - Schedule (??-2015?)
 - FEP screening process
 - FEPs vs. scenarios
- Two-Dimensional FEP Matrix Approach
 - Groups related FEPs in a single location (i.e., cell, row, or column)
 - Provides an intuitive alpha-numeric identification scheme
 - Supports safety assessment and safety case development by promoting easy searching of FEP Catalogue to find related issues
 - Present to NEA FEP Working Group in Oct 2014

21

Electronic FEP Database

GRS | Siedlungs- und National-
Forschungslabore der
Bundesrepublik Deutschland

- To be developed (future work?)
 - e.g. Qt (C++ GUI library) / Postgres SQL / MySQL

22

Acknowledgement

GRS | Siedlungs- und National-
Forschungslabore der
Bundesrepublik Deutschland

Supported by:

**Federal Ministry
of Economics
and Energy**

on the basis of a decision
by the German Bundestag

23

References

GRS | Siedlungs- und National-
Forschungslabore der
Bundesrepublik Deutschland

- DOE (U.S. Department of Energy) 2009. *Title 40 CFR Part 191 Subparts B and C Compliance Recertification Application for the Waste Isolation Pilot Plant Appendix SCR-2009 Feature, Event, and Process Screening for PA*. DOE/WIPP09-3424, U.S. Department of Energy, Carlsbad Area Office, Carlsbad, New Mexico.
- U.S. Department of Energy, F.A., Houseworth, J.E., and Cumane, J.C. 2011. *Disposal System Features, Events, and Processes (FEPs); FY11 Progress Report*. SAND2011-6059P, Sandia National Laboratories, Albuquerque, NM.
- Freeze, G., Manner, P., Blink, J.A., Capouscio, F.A., Houseworth, J.E., and Cumane, J.C. 2011. *Disposal System Features, Events, and Processes (FEPs); FY12 Progress Report*. SAND2011-6059P, Sandia National Laboratories, Albuquerque, NM.
- Freeze, G., Sevougian, S., and Gross, M. 2013. *Safety Framework for Disposal of Heat-Generating Waste in Salt: Features, Events, and Processes (FEPs) Classification*. FCRD-UFPE-2013-000191, U.S. Department of Energy, Office of Nuclear Energy, Used Fuel Disposition Campaign, Washington, D.C.
- Freeze, G., Sevougian, S. D., Leigh, C., Gross, M., Wolf, J., Mong, J., and Buhmann, D. 2014a. *New Approach for Feature, Event, and Process (FEP) Analysis of UNFHW Disposals*. SAND2013-1649-SC, UNM2014 Conference, Phoenix, AZ, March 2-6, 2014.
- Freeze, G., Sevougian, S. D., Leigh, C., Gross, M., Wolf, J., Mong, J., and Buhmann, D. 2014b. *Development of a Salt Repository FEP Catalogue*. SAND-2014-243P, Sandia National Laboratories, Albuquerque, New Mexico.
- NEA (Nuclear Energy Agency) 1999. *An International Database of Features, Events, and Processes*. Paris, France: Organisation for Economic Co-operation and Development.
- NEA (Nuclear Energy Agency) 2006. *The NEA International FEP Database: Version 2*. Paris, France: Organisation for Economic Co-operation and Development.
- Sevougian, S. D., A. Freeze, M. B. Gross, Joen Lee, C. D. Leigh, P. E. Manner, R. J. MacKinnon, and P. Vaughn. 2012. *TSPA Model Development and Sensitivity Analysis of Processes Affecting Performance of a Salt Repository for Disposal of Heat-Generating Nuclear Waste*. FCRD-UFPE-2012-000320 Rev 0, U.S. Department of Energy, Office of Nuclear Energy, Used Fuel Disposition Campaign, Washington, D.C.
- Wolf, J., Altmäier, M., Behan, J., Bauth, T., Brücke, G., Bühne, C., Buhmann, D., Dresbach, C., Hammer, J., Keller, S., Klenke, B., Kling, H., Konig, J., Lammertzen, A., Metz, V., Mong, J., Mogilla, S., Popp, T., Rabeh, A., Weber, J.R., Goebben, GRS-282, Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH, Köln, 2012.
- Wolf, J., Altmäier, M., Behan, J., Bauth, T., Brücke, G., Bühne, C., Buhmann, D., Dresbach, C., Hammer, J., Keller, S., Klenke, B., Kling, H., Konig, J., Lammertzen, A., Metz, V., Mong, J., Mogilla, S., Popp, T., Rabeh, A., Weber, J.R., Goebben, GRS-282, Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH, Köln, 2012b. *FEP-Katalog: Bericht zum Arbeitsschritt 7: Vorläufige Sicherheitsanalyse für den Standort Gorleben*.
- Klenke, B., Kling, H., Konig, J., Lammertzen, A., Metz, V., Mong, J., Mogilla, S., Popp, T., Rabeh, A., Weber, J.R., Goebben, GRS-282, Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH, Köln, 2012c. *FEP-Katalog: Bericht zum Arbeitsschritt 7: Vorläufige Sicherheitsanalyse für den Standort Gorleben*.

24

IGD-TP Joint activity: Handling of uncertainties

US-German Workshop on Salt Repository Research

September 7-12, 2014

Santa Fe, New Mexico, USA

D.-A. Becker, U. Noseck

Gesellschaft fuer Anlagen- und Reaktorsicherheit, Braunschweig,
Germany

Abstract

IGD-TP was founded as a technology platform for Implementing Geological Disposal of Radioactive Waste in Europe, in order to co-ordinate R&D activities, demonstrate technology and safety and underpin the development of a common European view on the related issues. Non-European countries are welcome to participate. The IGD-TP Strategic Research Agenda (SRA) defines several topics of specific interest; topic 1.3 specifically addresses sensitivity and uncertainty analysis. According to this demand, a Joint Activity (JA) was defined, titled "Handling of Uncertainties in the Safety Case for Deep Geological Repositories". To work on this issue, a Technical/Scientific Working Group (TSWG) was founded, currently consisting of 14 organizations from 10 European countries and the USA; further participants are welcome. The work of the TSWG is expected to lead to an EC-co-ordinated international project. The presentation explains the goals of the Joint Activity and its current status.

IGD-TP Joint activity: Handling of uncertainties

Dirk-A. Becker, Ulrich Noseck, GRS

September 9, 2014

2014 US/German Workshop on Salt Repository Research,
Design, and Operation
Santa Fe

Background: IGD-TP

Implementing Geological Disposal of Radioactive Waste – Technology Platform
www.igdtp.eu

"Our vision is that by 2025, the first geological disposal facilities for spent fuel, high-level waste and other long-lived radioactive waste will be operating safely in Europe."

Goals

- implementation-oriented R&D activities on all remaining key aspects of deep geological disposal of spent fuel and long-lived radioactive waste
- demonstration on the technologies and safety
- underpin the development of a common European^(*) view on the main issues related to the management and disposal of waste

Founded as a European Technology Platform (ETP) to

- provide a framework [...] to define research and development priorities, timeframes and action plans on a number of strategically important issues
- play a key role in ensuring an adequate focus of research funding on areas with a high degree of industrial relevance
- address technological challenges that can potentially contribute to a number of key policy objectives

()Non-European countries are welcome to participate!*

2014 US/German Workshop on Salt Repository Research, Design, and Operation

IGD-TP Strategic Research Agenda (SRA): Key Topics

1. Safety case
 - 1.1 (HP): Increase the confidence in, testing and further refinement of the tools (concepts, definition of scenarios and computer codes) used in licensing safety assessments
 - 1.2 (HP): Improving safety case communication
 - 1.3 (MP): Increase the confidence in and further refinement on how to make sensitivity and uncertainty analyses
2. Waste forms and their behaviour
3. Technical feasibility and long-term performance of repository components
4. Development strategy of the repository
5. Operational Safety
6. Monitoring
7. Governance and Stakeholder involvement

IGD-TP Deployment Plan (DP): Joint Activities (JA)

JA types

- Organizational Working Group (ORWG)
- Technical/Scientific Working Group (TSWG)
 - developing a scientific or technical Topic
 - preparatory work to generate a possible technical project (TEP)
 - to be initiated when the Topic's subject needs to be analyzed by a group of experts prior to being turned into a Technical Project (TEP)
 - members cover their own costs
 - Information Exchange Platform (IEP)
 - Technical Project (TEP)
 - activity that covers technical or scientific work on a specific SRA Topic
 - clear RD&D problem definition necessary
 - different funding models
- Technological Transfer (TT)

Both SRA and DP are being revised and not yet available in final form!

IGD-TP Joint Activity 8

Handling of Uncertainties in the Safety Case for Deep Geological Repositories
(Former title: "Benchmarking" for confidence in long term safety in Safety Cases)

- Addresses mainly SRA topic 1.3
- Contribution to SRA topics 1.1 and 1.2
- TSWG founded

ANDRA (FR)	NRG (NL)
ENRESA (ES)	NW/MO (CA)
Gaison Ltd. (UK)	Posiva Oy (FI)
GRS (DE)	Sandia Labs (USA)
JAEA (JP)	SKB (SE)
NAGRA (CH)	SURAO (CZ)
NDA (UK)	TU-Clausthal (DE)
NIRAS/ONDRAF (EE)	UV (CZ)
- TEP planned to be launched in 2015/2016

2014 US/German Workshop on Salt Repository Research, Design, and Operation

5

History of JA8 in IGD-TP

June 2012: IGD-TP Deployment Plan

- Definition of JA8:
 - „Benchmarking“ for confidence in Long Term Safety in Safety Cases: TSWG
 - Topic 1.3: Increase confidence and further refinement of methods to make sensitivity and uncertainty analyses

May 2013: 1st Meeting of interested organizations

- Foundation of a TSWG
 - ANDRA, ENRESA, Gaison, GRS, JAEA?, NAGRA, NDA, NIRAS-ONDRAF?, NRG, NWMO, POSIVA, SANDIA, SKB, SURAO, TU-CI, UV
- Definition of project contents
- Elaboration of an outline project structure

2014 US/German Workshop on Salt Repository Research, Design, and Operation

6

History of JA8 in IGD-TP (cont.)

July 2013: First draft outline proposal (Dan Gaison)

- 8 tasks

August 2013: Second draft outline proposal (GRS)

- 4 WPs with 13 tasks, altogether

September 2013: 2nd Meeting of Interested organizations

- Planning of activities of the TSWG
- New title of activity: "Handling of Uncertainties in the Safety Case for Deep Geological Repositories"

2014 US/German Workshop on Salt Repository Research, Design, and Operation

7

Motivation: Uncertainties in the Safety Case

- Are we investigating the right **scenarios**?
 - Are we using the right FEPs?
 - Are our FEP descriptions correct?
 - Do we assign the right probabilities to the FEPs?
- Are we using adequate **models**?
 - Do we model all relevant effects?
 - Are our models suitable for describing these effects?
 - Are the models sufficiently accurate?
- Will the **data** we use lead to reliable results?
 - Is our knowledge of nature good enough to justify the utilized data?
 - Can physically uncertain effects have an influence?

→ *Proper handling of uncertainties is an essential part of the Safety Case*

2014 US/German Workshop on Salt Repository Research, Design, and Operation

8

GRS

Handling of Uncertainties

- Scenario uncertainties
 - Identification of possible influences
 - Proper scenario analysis
- Model uncertainties
 - Identification of possible model uncertainties
 - Application of different model options
- Data uncertainties
 - Quantification of data uncertainties
 - Deterministic parameter variations
 - Probabilistic analysis
 - uncertainty analysis
 - sensitivity analysis

2014 US/German Workshop on Salt Repository Research, Design, and Operation 9

GRS

Outcome and Recommendations from Former Projects PAMINA and MeSA

- Uncertainty analysis
 - Proposal for a systematic procedure to derive PDFs
 - Protocol to treat model uncertainties
 - These procedures should be further developed and tested in an international framework
 - Use of realistic Safety Cases
 - Experiences shared with other institutions could provide valuable guidance
- Expert judgement
 - Review of approaches was made
 - Necessary to examine such guidelines further
 - to determine whether and when more formal approaches to expert judgement are warranted
 - for system description and scenario derivation
- Probabilistic sensitivity analysis (SA)
 - Principle considerations of conventional and some modern methods for sensitivity analyses within the postclosure safety assessment of DGR
 - Robustness of various methods to handle non-linearities is quite different and the results are not always the same for all methods
 - More research work is needed to establish a reliable procedure for SA
 - An international frame would be needed for an efficient treatment of this task

2014 US/German Workshop on Salt Repository Research, Design, and Operation 10

GRS

2nd draft proposal: TEP: Confidence Building and Handling of Uncertainties in Safety Assessment for Geological Disposal Facilities

WP 1: Management of uncertainties

Task 1.1: Strategies for managing uncertainty

- Task 1.2: Management of uncertainties in different time frames of disposal system evolution
- Task 1.3: Regulatory decision-making under uncertainty
- Task 1.4: Communication of uncertainty

WP 2: Uncertainty identification and quantification

Task 2.1: Expert judgement

- Task 2.2: PDF derivation
- Task 2.3: Identification and quantification of correlations

WP 3: Sensitivity analysis

Task 3.1: Survey and assessment of methods in view of PA

- Task 3.2: Comparison of methods by numerical experiments
- Task 3.3: R&D triggering

WP 4: Co-ordination

Task 4.1: Work co-ordination

- Task 4.2: Training
- Task 4.3: International conference

2014 US/German Workshop on Salt Repository Research, Design, and Operation 11

GRS

Planned contributions of JAS participants in 2014 and 2015

Work in 2014/2015	WP 1 : Management of uncertainties / provide input
Task 1.1 : Strategies for managing uncertainty	NDA, Gaison, Andra, SKB, TUC, Posiva
Task 1.2 : Management of uncertainties in different time frames of disposal system evolution	Andra, SKB, Posiva, GRS
Task 1.3 : Regulatory decision-making under uncertainty	Comment: to be done within EC project, in 2 years, NDA (test in stakeholder dialogue), Gaison, GRS, Surao, UV
Task 1.4 : Communication of uncertainty	NDA, Gaison, Andra, SKB, TUC, Posiva, GRS, Surao, UV
WP 2 : Uncertainty identification and quantification (Leader: NDA)	NDA, Gaison, Andra, SKB, TUC, Posiva, GRS, Surao, UV
Task 2.1 : Expert judgement	BIS, Nagra?
Task 2.2 : PDF derivation	NDA, GRS, SKB, Posiva, Andra, NRG(2015), Surao, UV
Task 2.3 : Identification and quantification of correlations	NDA, GRS, Andra, SKB
WP 3 : Sensitivity analysis	GRS: distribute overview report second half 2014
Task 3.1 : Survey and assessment of methods in view of PA	GRS, Sanria, Andra, TUC: distribute overview report second half 2014
Task 3.2 : Comparison of methods by numerical experiments	GRS: distribute overview report second half 2014
Task 3.3 : R&D triggering	Surao, UV
Task 4.1 : Work co-ordination	
Task 4.2 : Training	
Task 4.3 : International conference	

2014 US/German Workshop on Salt Repository Research, Design, and Operation 12

Recent, Current or Planned Work related to WP 3	
GRS:	<ul style="list-style-type: none">• Compilation of an overview report on methods of sensitivity analysis• Test and comparison of different methods• two generic repository systems in rock salt• Identification of further methods to overcome identified problems
ANDRA:	<ul style="list-style-type: none">• Benchmark tests of sensitivity analysis methods<ul style="list-style-type: none">◦ repository system in clay (French concept)
Sandia:	<ul style="list-style-type: none">• Detailed sensitivity analysis studies for Yucca Mountain site

2014 US/German Workshop on Salt Repository Research, Design, and Operation

13

Further Procedure and Outlook	
Continue co-operation work within the TSWG on own cost until 2015/2016	<ul style="list-style-type: none">• Specific sub-groups with common interest• Topics as identified (cf. Table)
Schedule	<ul style="list-style-type: none">• October 2014: IGD-TP Exchange Forum Kalmar (Sweden)<ul style="list-style-type: none">◦ Presentation of on-going and planned JA8 work• Spring 2015: Technical meeting<ul style="list-style-type: none">◦ Presentation of results achieved in the working groups◦ Compilation of progress◦ Identification of topics for further international investigation• September 2015: Description of topics for a potential TEP
	2014 US/German Workshop on Salt Repository Research, Design, and Operation
	14

2014 US/German Workshop on Salt Repository Research, Design, and Operation

14

Uncertainty and Sensitivity Analysis for Repository Systems in Rock Salt

US-German Workshop on Salt Repository Research

September 7-12, 2014

Santa Fe, New Mexico, USA D.-A. Becker

Gesellschaft fuer Anlagen- und Reaktorsicherheit, Braunschweig,
Germany

Abstract

Probabilistic uncertainty and sensitivity analysis of the performance assessment model is an essential part of the safety case for final repositories. Current investigations at GRS and TU Clausthal aim at testing various classical and newly-developed mathematical methods of sensitivity analysis, identifying the typical problems arising with sensitivity analysis of complex final repository models and proposing solutions. The presentation gives an introduction to the general subject as well as an overview of possible approaches and methods and presents some recent results, using the example of a hypothetical repository for low and intermediate-level waste. This system was developed based on the experiences with the model for the German ERAM site.

Uncertainty and Sensitivity Analysis for Repository Systems in Rock Salt

Dirk-A. Becker, GRS
Contributions: Sabine Spiessl and Sebastian Kuhlmann
September 10, 2014
2014 US/German Workshop on Salt Repository Research, Design, and Operation
Santa Fe

Uncertainties in Long-Term Performance Assessment

Will the repository be safe now and forever?

- We cannot prove it
- We cannot do experiments over more than a few years
- We have to assess the safety by numerical modeling

But how do we know the simplified model calculates the right results?

- There are lots of uncertainties: model, scenario, parameters
- Can we trust the model if it says the repository is safe?
- Somehow we have to take the uncertainties into account ...

2014 US/German Workshop on Salt Repository Research, Design, and Operation

Handling of Uncertainties in PA

1. Identify the uncertainties
 - Which kind of uncertainty?
 - How can it be handled?
 - Conservative approach
 - Multiple investigations
 - Flexible model
 - Parameter bandwidth and distribution
2. Quantify parameter uncertainties
 - Analyze knowledge
 - Consult experts
 - Parameter dependencies?
 - Assign distributions
3. Perform probabilistic analysis
 - Many model runs with statistically varied parameters
 - Uncertainty analysis: Analyze the uncertainty of the model output
 - Sensitivity analysis: Analyze the model sensitivity to parameter variation

2014 US/German Workshop on Salt Repository Research, Design, and Operation

Probabilistic Performance Assessment

```
graph TD; Sample[Sample] --> NearField[Near Field]; Sample --> FarField[Far Field]; Sample --> Biosphere[Biosphere]; NearField -- ConcentrFlux[Concentr./flux] --> FarField; FarField -- ConcentrFlux[Concentr./flux] --> Biosphere; Biosphere -- DoseRate[Dose rate] --> Postprocessor[Postprocessor]; Deterministic[Deterministic Preprocessor] -- InputData[Input Data] --> NearField; Deterministic -- InputData[Input Data] --> FarField; Deterministic -- InputData[Input Data] --> Biosphere; Statistics[Statistics] -- RandomVariables[Random variables] --> Sample;
```

2014 US/German Workshop on Salt Repository Research, Design, and Operation

GRS

Probabilistic Performance Assessment

```
graph TD; Sample[Sample] --> NearField[Near Field]; Sample --> FarField[Far Field]; Sample --> Biosphere[Biosphere]; NearField -- ConcentrFlux[Concentr./flux] --> FarField; FarField -- ConcentrFlux[Concentr./flux] --> Biosphere; Biosphere -- DoseRate[Dose rate] --> Postprocessor[Postprocessor]; Deterministic[Deterministic Preprocessor] -- InputData[Input Data] --> NearField; Deterministic -- InputData[Input Data] --> FarField; Deterministic -- InputData[Input Data] --> Biosphere; Statistics[Statistics] -- RandomVariables[Random variables] --> Sample;
```

2014 US/German Workshop on Salt Repository Research, Design, and Operation

Uncertainty and Sensitivity Analysis: Why?




Uncertainty analysis

- Calculate bandwidth of possible model output
- Assess probability of limit exceedance

Sensitivity analysis

- Identify "important", "less important" and "unimportant" parameters
- "Importance" means:
 - the parameter value within its bandwidth has a considerable influence to the model output
 - Trigger research needs
 - Improve model understanding
 - SA provides insight to the model behavior
 - Help finding model or data errors
 - SA can disclose implausible model behavior

2014 US/German Workshop on Salt Repository Research, Design, and Operation

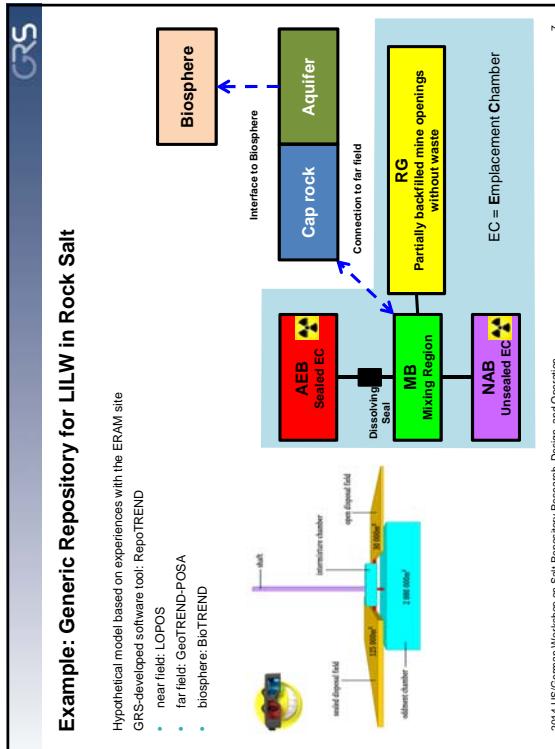

Methods of Sensitivity Analysis



Graphical methods


- Give a direct impression of parameter importance
- Provide visual insight to the model behavior
- Can disclose sophisticated input-output relationships
- Methods based on **linear correlation or regression**
- Provide information on the direction of influence
- Best adequate for linear or close-to-linear systems
- Adequate for monotonic systems after application of rank transformation





Variance-based methods

- Provide quantitative information on parameter sensitivity
- Do not provide information on the direction of influence
- Adequate for all kinds of models
- Non-parametric** methods
- Based on non-parametric statistics (two-sample tests, e.g.)
- No implicit assumptions on model behavior

6

2014 US/German Workshop on Salt Repository Research, Design, and Operation

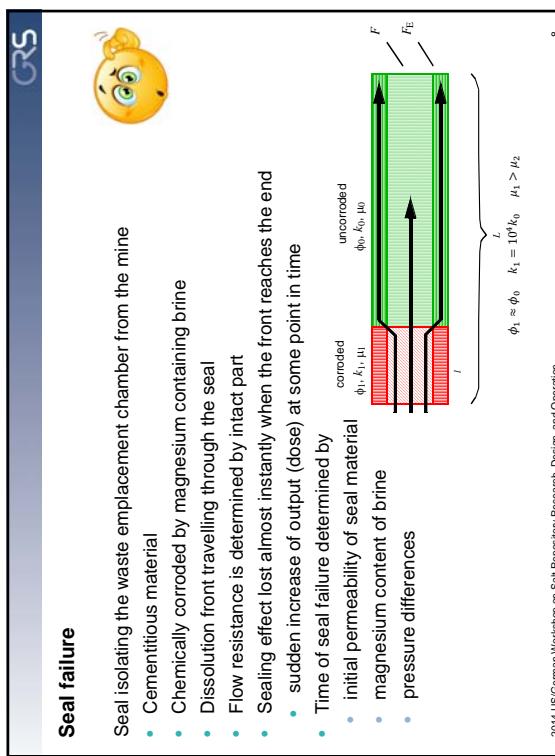

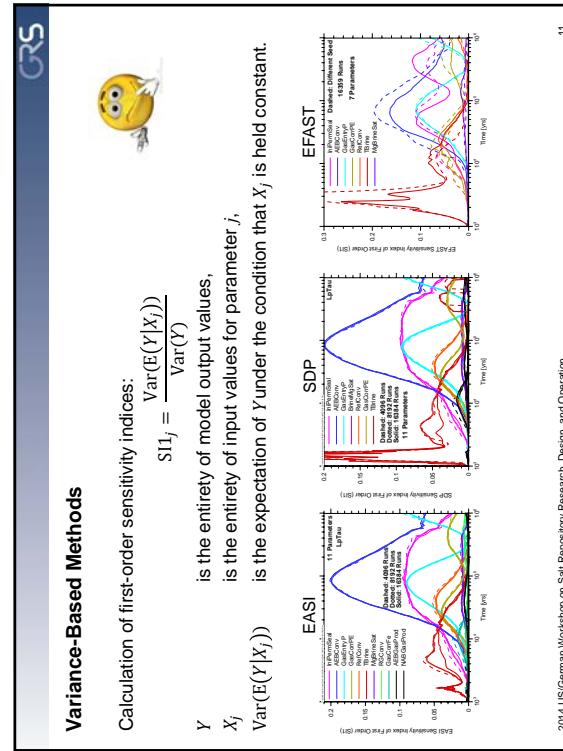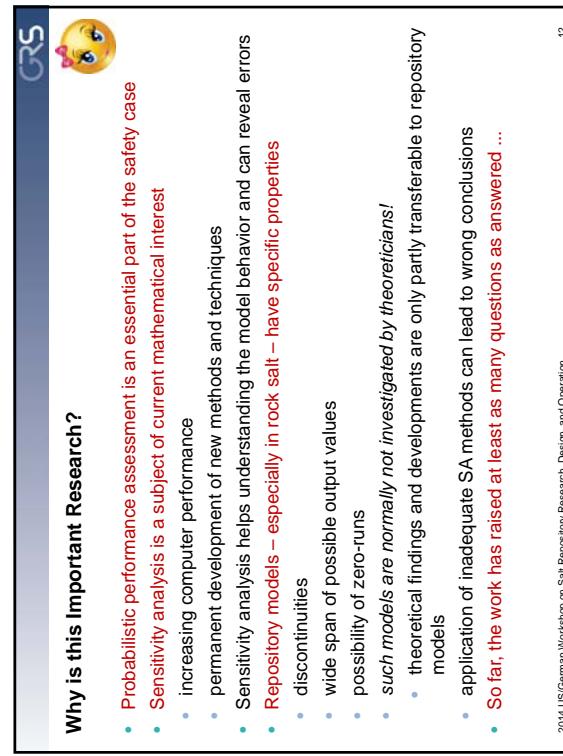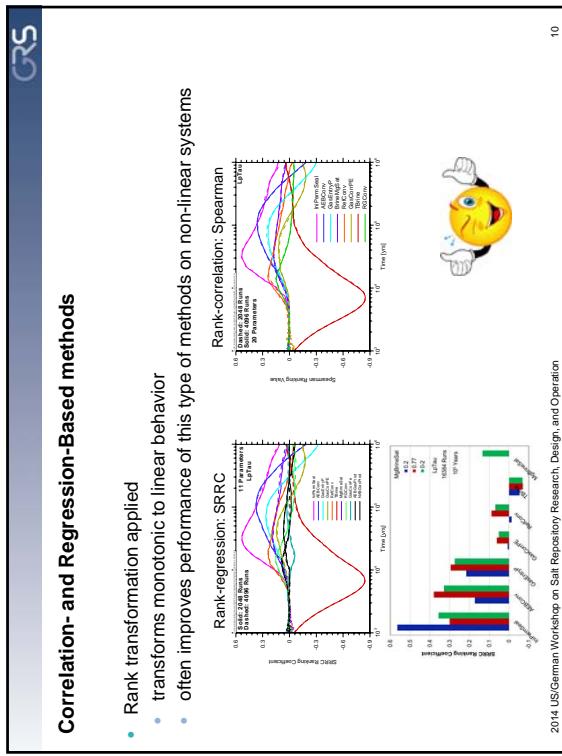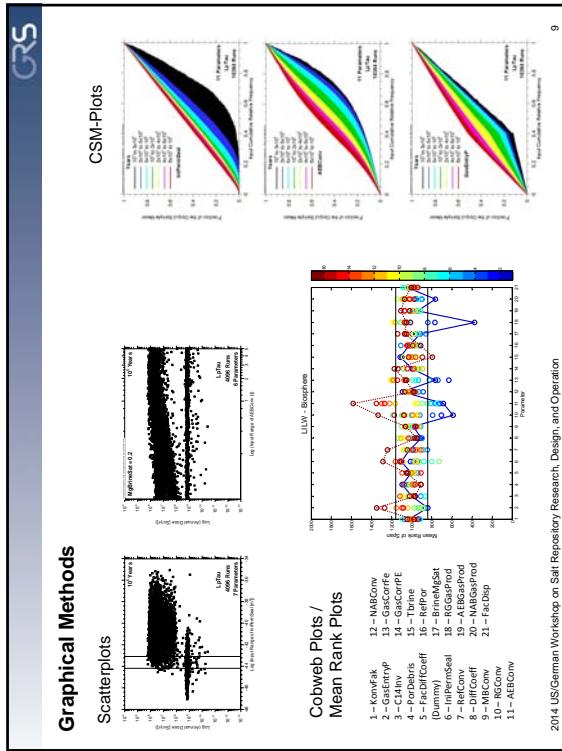

THM-coupled processes in rock salt with special attention to two-phase flow

Benchmark of two different modelling approaches concerning the long-term analysis of THM-coupled processes in the near-field of a generic salt repository for high-level nuclear waste

Karl-Heinz Lux, Uwe Düsterloh, Ralf Wolters

Clausthal University of Technology (TUC), Clausthal-Zellerfeld, Germany

Jens T. Birkholzer, Jonny Rutqvist, Laura Blanco Martín

Lawrence Berkeley National Laboratory (LBNL), Earth Sciences Division, Berkeley, CA, USA

Abstract

Rock salt is a potential host rock medium for the underground disposal of high-level nuclear waste because it has several assets, in particular its water and gas tightness in the undisturbed state, its ability to heal technically induced fractures and its high thermal conductivity as compared to other shallow-crustal rock types. To comply with the safety requirements of a repository for high-level nuclear waste, the long-term integrity of the geologic as well as geotechnical barriers has to be evaluated. For this purpose, numerical simulations regarding the long-term behaviour of geologic as well as geotechnical barriers of a high-level nuclear waste repository are required, based on state-of-the-art knowledge and using verified and validated numerical simulation tools.

We present an overview on the physical behaviour of rock salt as well as results of two benchmark exercises performed by Clausthal University of Technology and Lawrence Berkeley National Laboratory to validate the numerical simulation tools FLAC-TOUGH (TUC) and TOUGH-FLAC (LBNL) [1]. The first benchmark exercise concerns the TSDE-experiment [2] which has been performed during the 1990s within the German Asse-mine to investigate the compaction behaviour of crushed salt under HLW-disposal conditions in salt rock mass. Thus, this experiment provides excellent data on crushed salt compaction. Moreover, the three-dimensional modelling of the experiment has led to the calibration of some parameters needed to describe the time-dependent response of the natural salt host rock [3], whose determination is difficult in laboratory tests, e.g. due to very low deviatoric stresses resulting in extremely long test durations. The second benchmark exercise concerns the long-term analysis of THM-coupled processes in the near-field of a generic salt repository for high-level nuclear waste. Therefore, a two-dimensional model of an emplacement drift is investigated, including a heat- and gas-generating waste package and the crushed salt backfill material within the drift. Due to the compaction of the crushed salt and the corrosion-induced gas generation, a gas pressure build-up occurs within the emplacement drift, leading to a pressure-driven fluid infiltration into the surrounding salt rock mass. This infiltration process has to be regarded as a two-phase flow scenario.

The results of the performed benchmark exercises are very satisfactory and increase the credibility of numerical predictions concerning the long-term behaviour of a high-level nuclear waste repository in salt rock mass.

References:

- [1] Blanco Martín, L., Rutqvist, J., Birkholzer, J.T., Wolters, R., Rutenberg, M., Zhao, J., Lux, K.-H. Comparison of two modeling procedures to evaluate thermal-hydraulic-mechanical processes in a generic salt repository for high-level nuclear waste. Proceedings of the 48th US Rock Mechanics/Geomechanics Symposium, Minneapolis, June 1-4 2014. Paper 14-7411.
- [2] Bechthold, W., Rothfuchs, T., Poley, A., Ghoreychi, M., Heusermann, S., Gens, A., Olivella, S., 1999. Backfilling and Sealing of Underground Repositories for Radioactive Waste in Salt (BAMBUS Project). European Atomic Energy Community. Report EUR19124 EN.
- [3] Wolters, R., Lux, K.-H., Düsterloh, U., 2012. Evaluation of Rock Salt Barriers with Respect to Tightness: Influence of Thermomechanical Damage, Fluid Infiltration and Sealing/Healing. Proceedings of the 7th International Conference on the Mechanical Behavior of Salt (SaltMech7). Paris: Balkema, Rotterdam.

 TU Clausthal

THM-coupled processes in rock salt with special attention to two-phase flow

Benchmark of two different modelling approaches concerning the long-term analysis of THM-coupled processes in the near-field of a generic salt repository for high-level nuclear waste

K.-H. Lux, U. Dütsterloh, R. Wolters
J.T. Birkholzer, J. Ruitqvist, L. Blanco Martín

5th US/German workshop on salt repository research, design, and operation
Santa Fe, September 10th 2014



 TU Clausthal

Contents


- Physical behaviour of rock salt
- Constitutive model Lux/Wolters
- Numerical simulation tools TOUGH-FLAC and FLAC-TOUGH
- Benchmark 1:
TSDE-experiment within Asse-mine in Germany
- Benchmark 2:
Long-term analysis of THM-coupled processes in the near-field of a generic salt repository for high-level nuclear waste
- Conclusions & perspectives



 TU Clausthal


Physical behaviour of rock salt

▪ Creep behaviour of rock salt under deviatoric stress conditions with transient, steady-state and tertiary creep phase

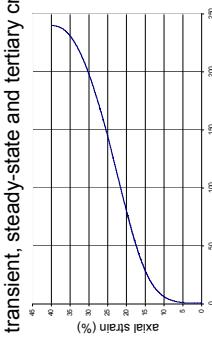



Change of properties is used for monitoring and determination of dilatancy / damage

I - compaction
II - damage (micro)
III - rupture (macro)



▪ Damage behaviour of rock salt under deviatoric stress conditions exceeding the damage / dilatancy boundary


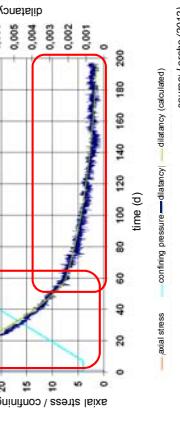




 TU Clausthal

Physical behaviour of rock salt

▪ Sealing / healing behaviour of rock salt under suitable stress conditions

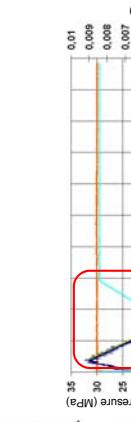source: Schulte et al. (2001)



TU Clausthal

Physical behaviour of rock salt

- Creep behaviour of rock salt is dependent on temperature → Lux (1984), Hampel (2006)
- Damage behaviour of rock salt is dependent on temperature → Langer (1980), Hampel et al. (2014)
 - Temperature changes lead to
 - thermally induced deformations
 - thermally induced additional stresses

THM-coupled processes in rock salt with special attention to two-phase flow

EARTH SCIENCES DIVISION

BERKELEY LAB

TU Clausthal

Physical behaviour of rock salt

- Undisturbed rock salt is liquid and gas tight!
- Connection of damage-induced microfissures creates micropathways within the damaged rock salt area → increase of secondary permeability $K^s > 0 \text{ m}^2$ and secondary porosity $\phi^s > 0$

source: Stomont (1990)

THM-coupled processes in rock salt with special attention to two-phase flow

EARTH SCIENCES DIVISION

BERKELEY LAB

TU Clausthal

Physical behaviour of rock salt

- Damage of rock salt
 - reduction of bulk modulus K
 - increase of Biot's coefficient $\alpha = 1 - \frac{K}{K_S}$
- Lab test results concerning the relationship between dilatancy, secondary permeability and Biot's coefficient are shown in Kansy (2007)
- Biot's coefficient is used to calculate effective stresses, if pore pressure occurs

$$\sigma'_{ij} = \sigma_{ij} - \alpha \cdot p_{Ft} \cdot \delta_{ij}$$

THM-coupled processes in rock salt with special attention to two-phase flow

EARTH SCIENCES DIVISION

BERKELEY LAB

TU Clausthal

Physical behaviour of rock salt

- Fluid pressure may open grain boundaries between rock salt grains
- Lab investigations concerning the pressure-driven fluid infiltration process → Düsterloh (2009)





Darcy-flow





infiltration phase hydraulic breakthrough





THM-coupled processes in rock salt with special attention to two-phase flow





EARTH SCIENCES DIVISION





BERKELEY LAB

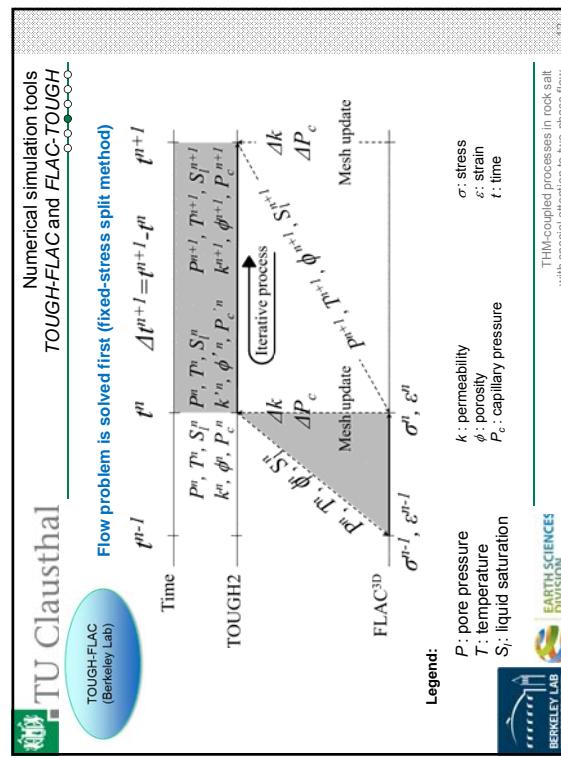
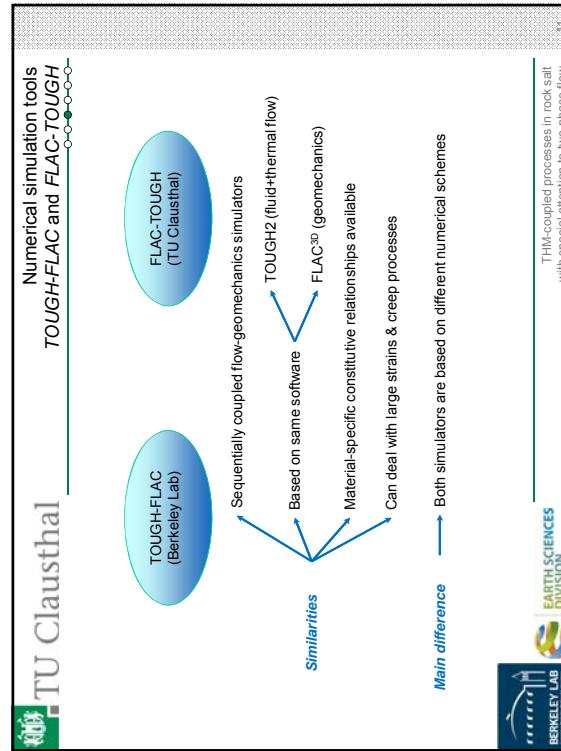
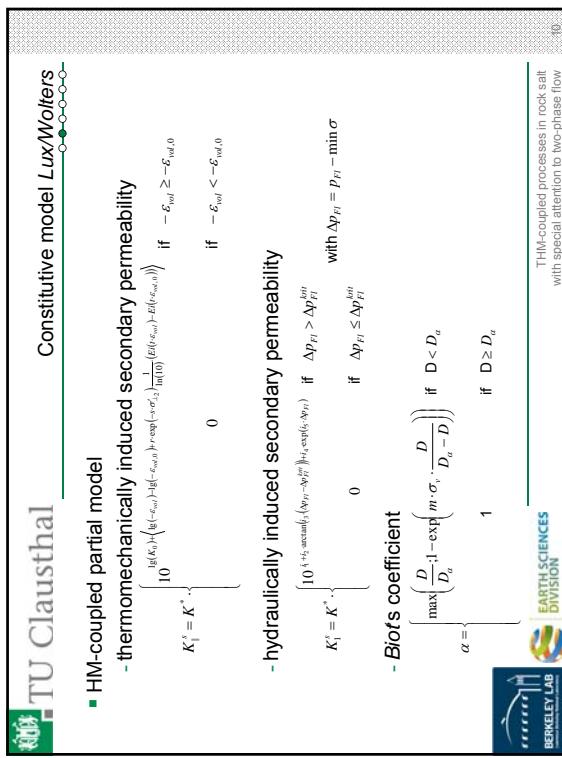
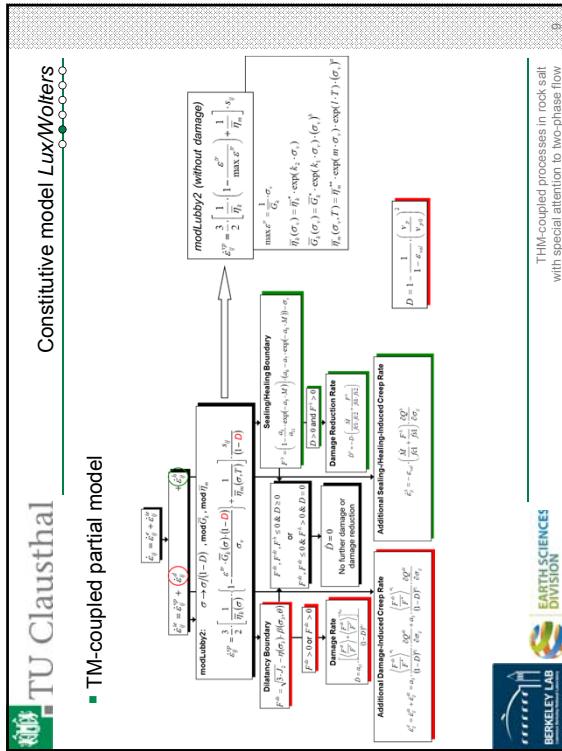


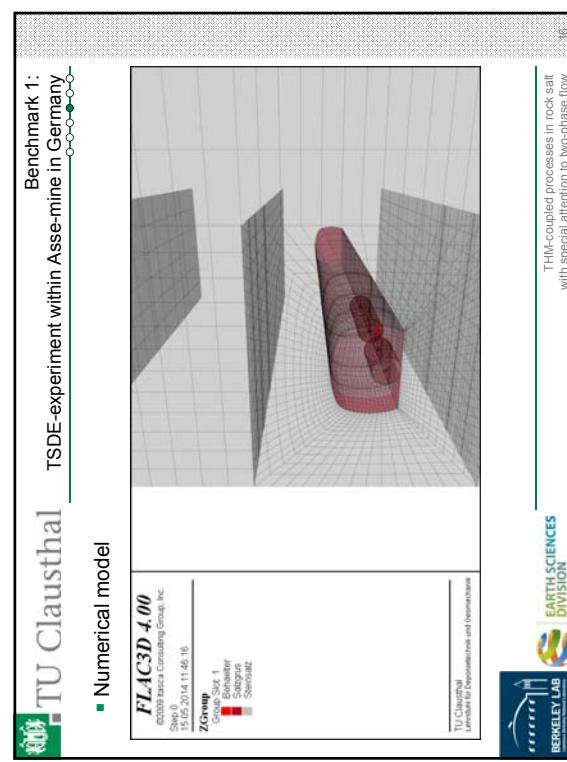
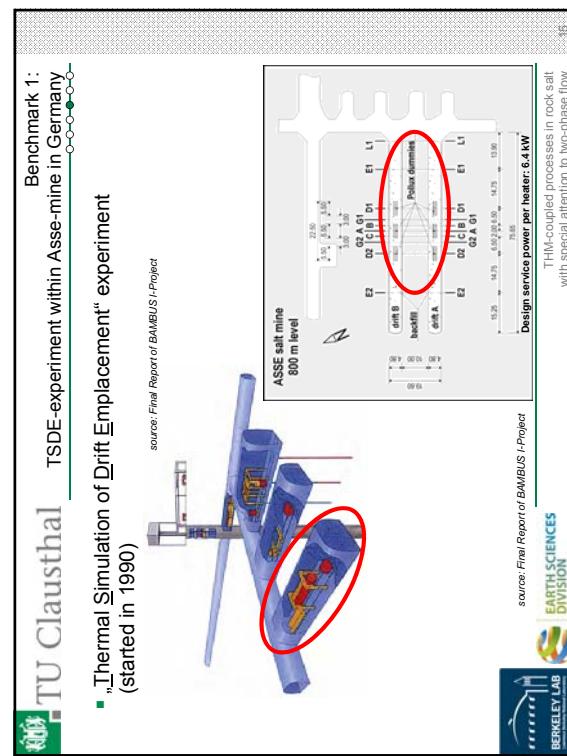
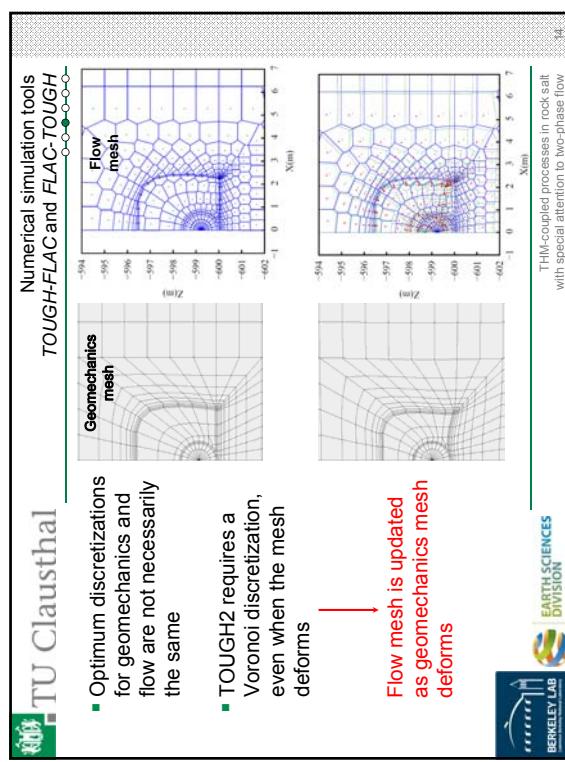
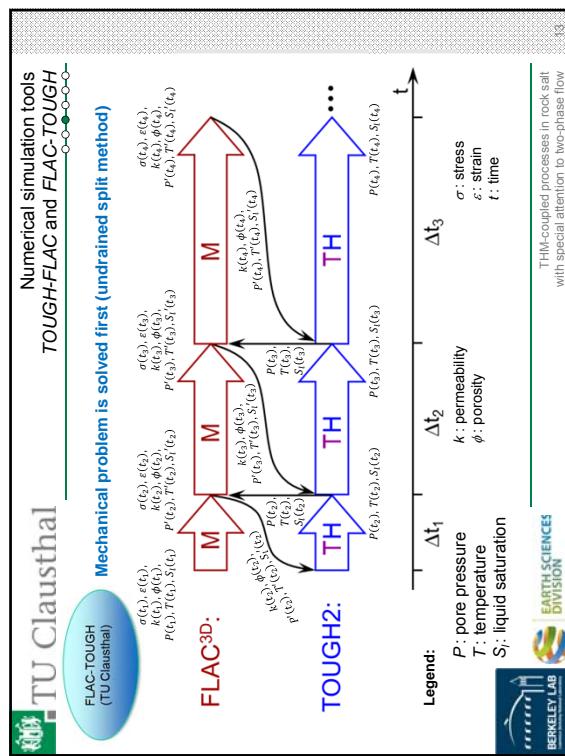


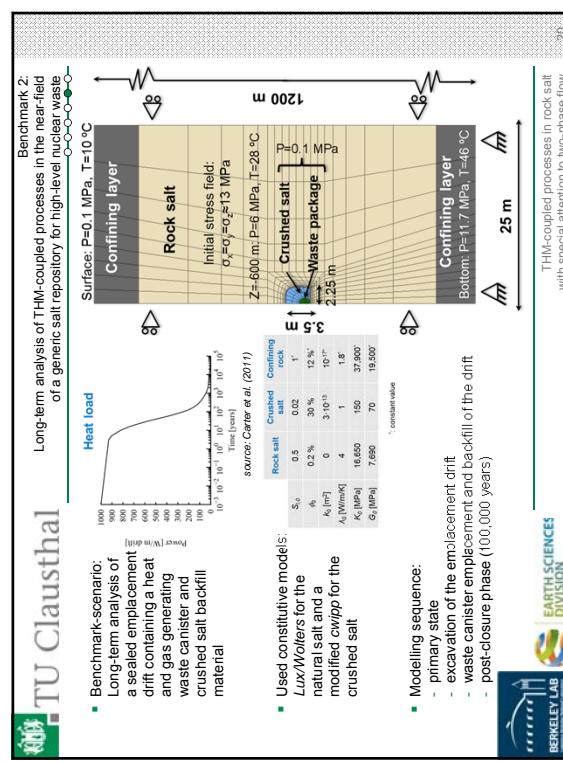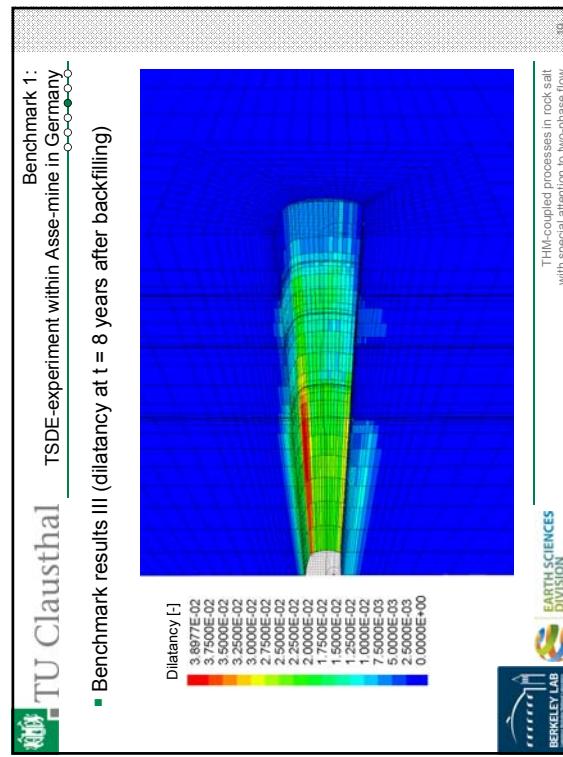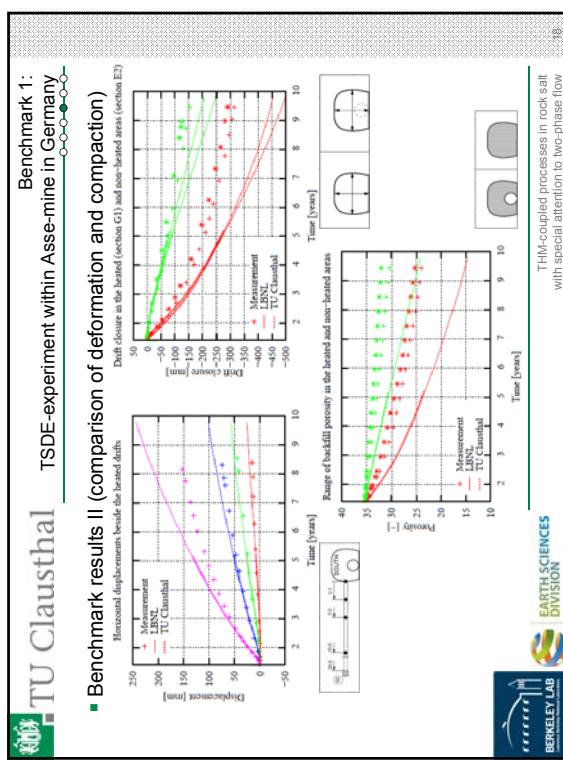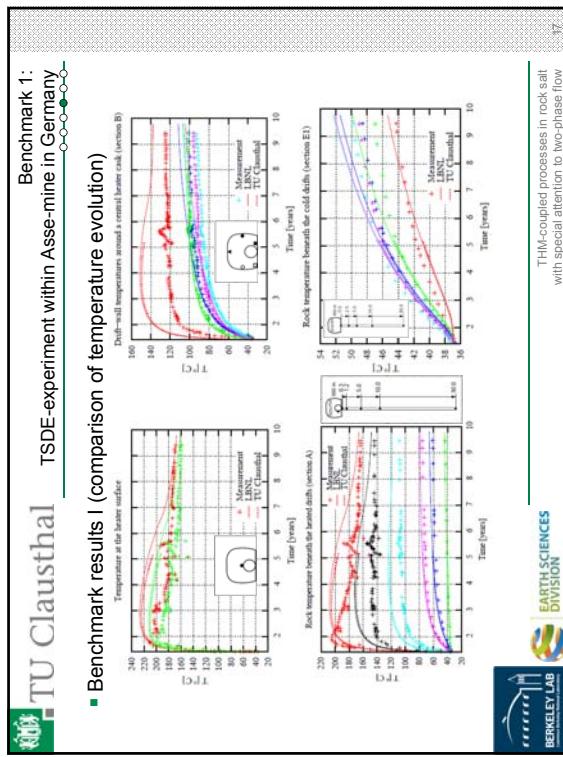

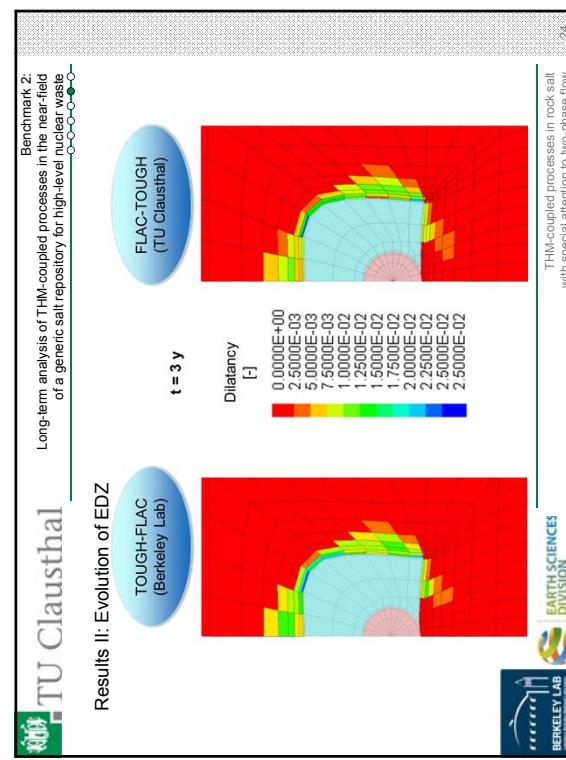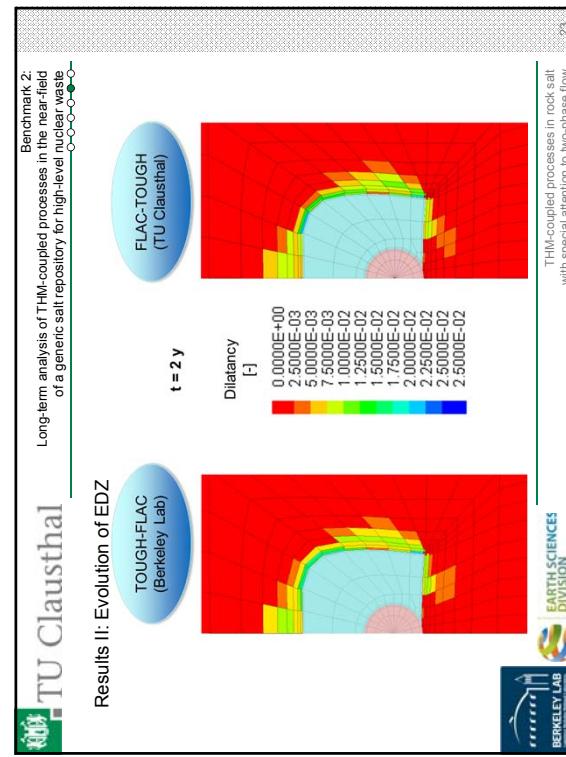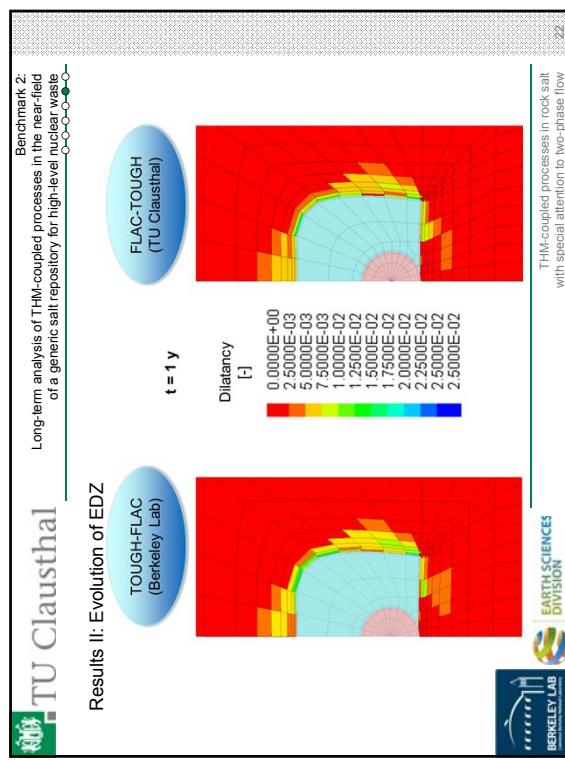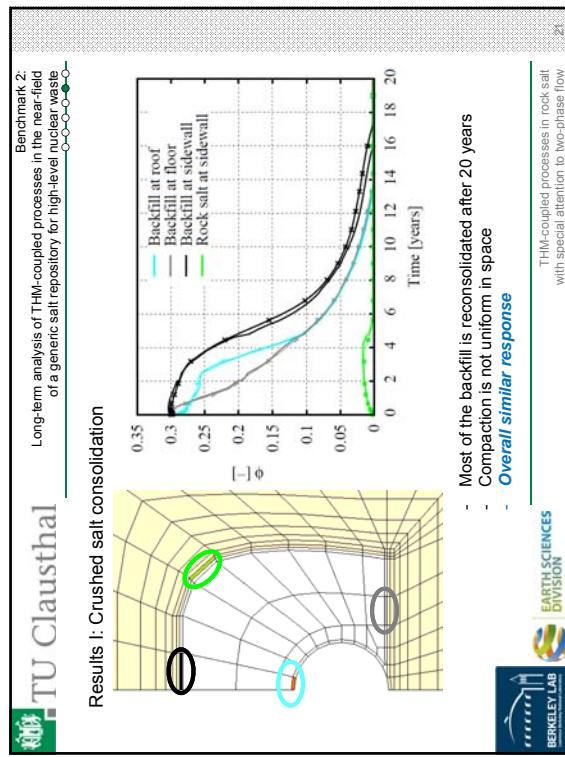

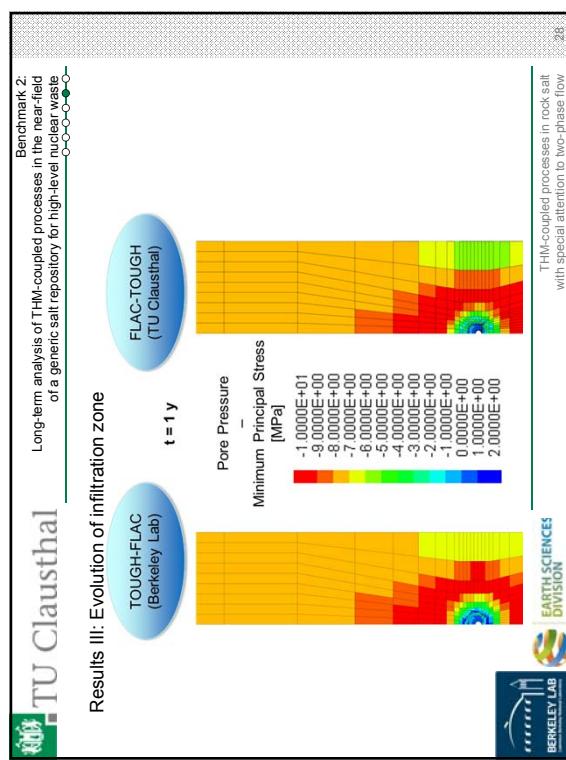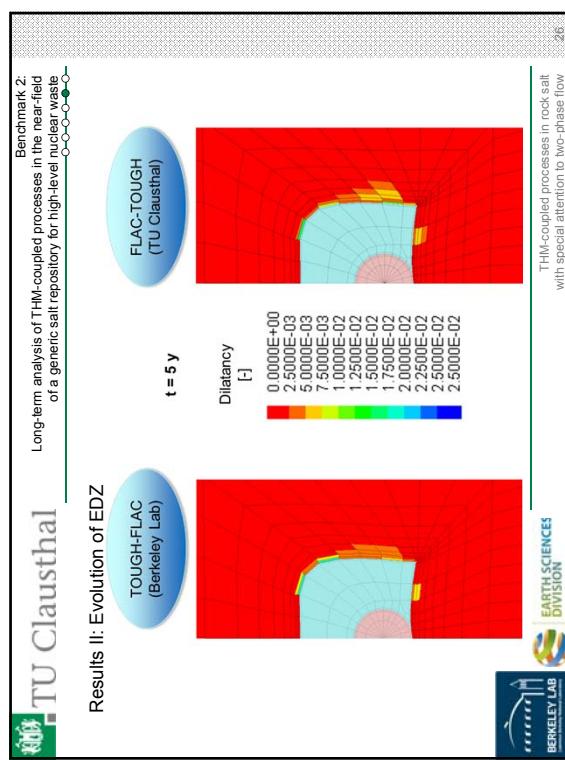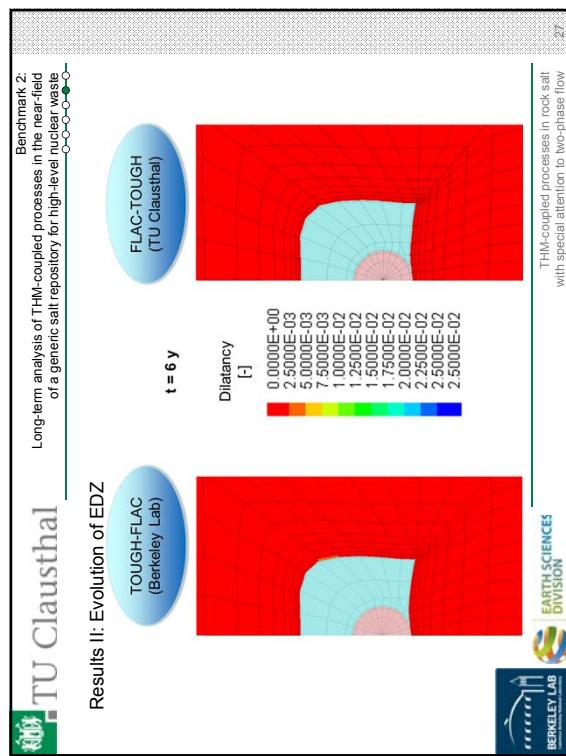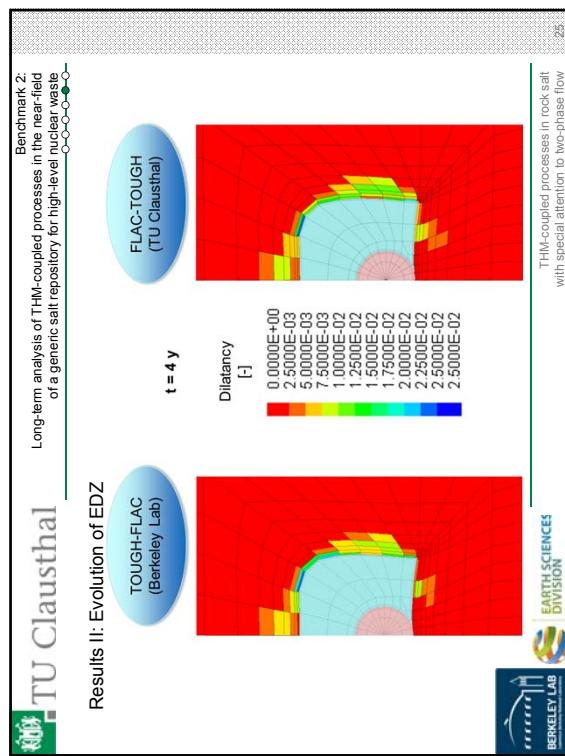

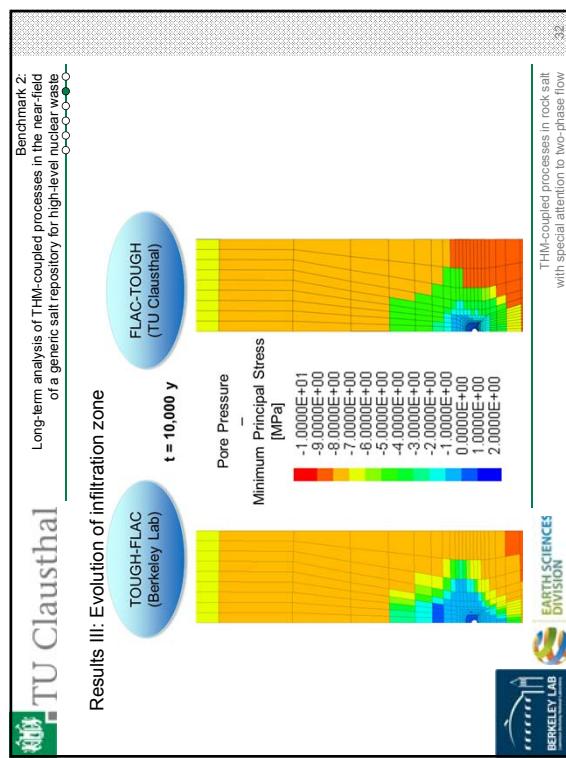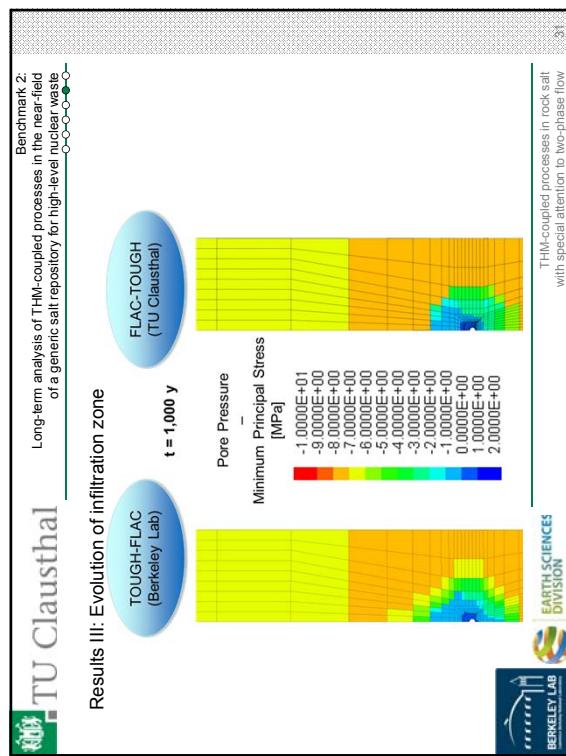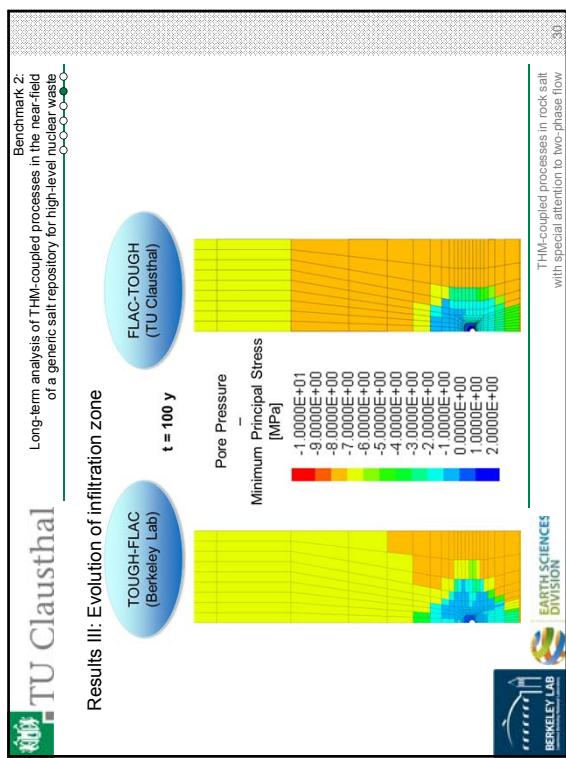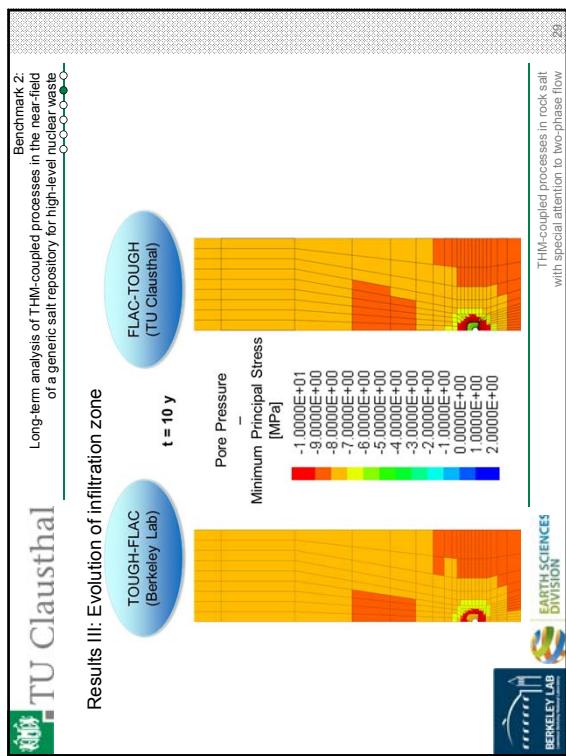

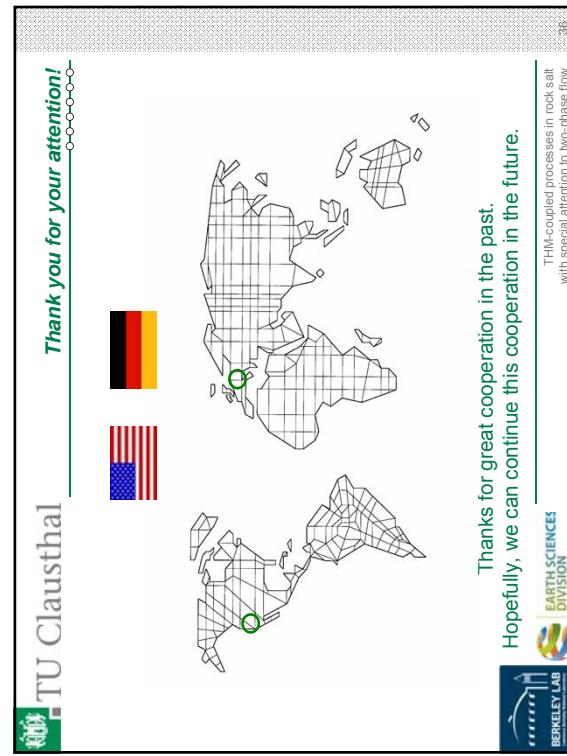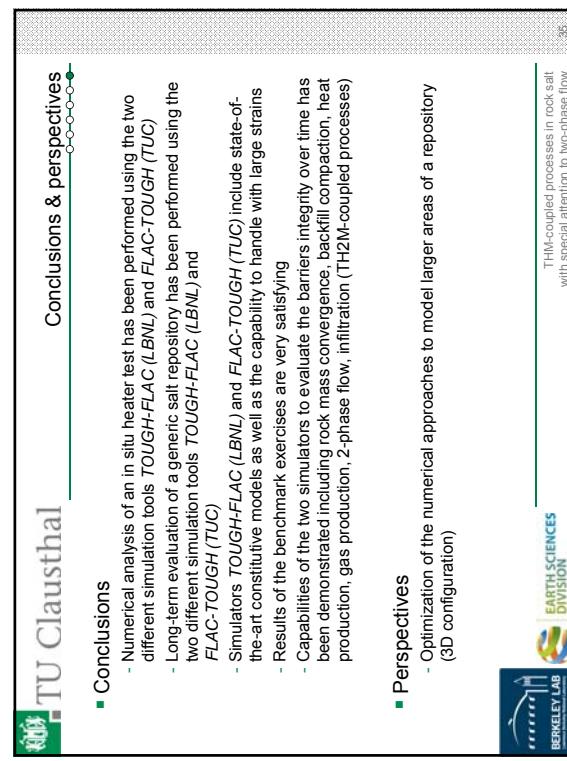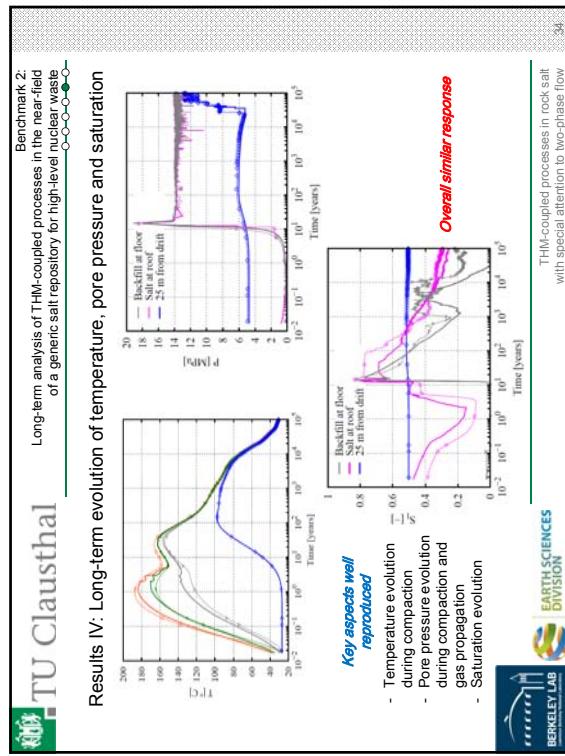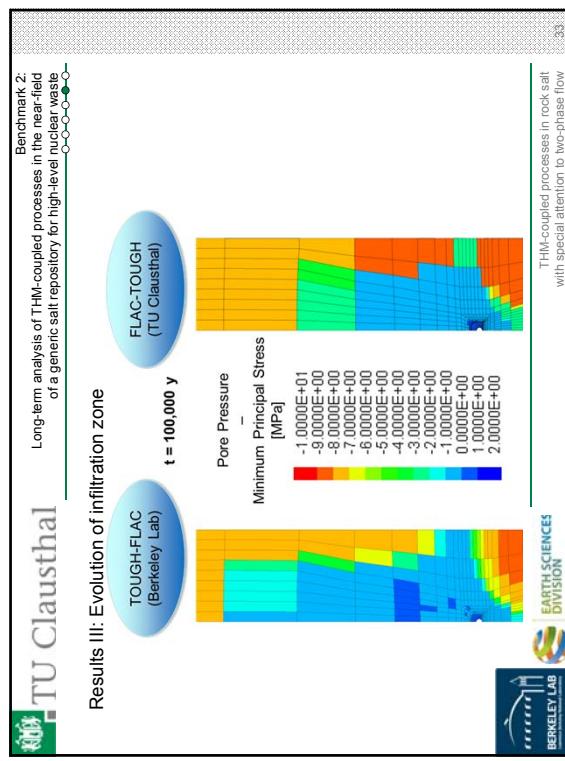

THM-coupled processes in rock salt
with special attention to two-phase flow

Thanks for great cooperation in the past.
Hopefully, we can continue this cooperation in the future.



THM-coupled processes in rock salt
with special attention to two-phase flow



35



September 2014



P&T in the Context of Waste Management



Wilhelm Bollingerfehr
DBE TECHNOLOGY GmbH
Eschenstraße 55, D-31224 Peine/Germany
Jörg Möning
Gesellschaft für Anlagen- und Reaktorsicherheit (GRS) mbH
Theodor-Heuss-Straße 4, D-38122 Braunschweig/Germany

Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000. SAND NO. 2014-04000P



Objectives

- German Ministry for Economic Affairs and Energy (BMWi) and Ministry of Education and Research (BMBF) jointly launched a study on Partitioning and Transmutation (P&T) in summer 2012 to elaborate in detail:

- the international state of the art in (P&T) and
- the potentials as well as the chances and risks of implementing P&T in Germany

- In this context several social scenarios were derived and the consequences of P&T were compared

- Of particular relevance was an analysis of the implications of P&T on the waste management concept as well as on the disposal of radioactive waste in the light of the phase-out decision in Germany

- DBE TECHNOLOGY GmbH and GRS investigated the consequences of P&T on the repository concepts (footprint) and on the long-term safety

Outline


- Objectives of P&T Study
- Fundamentals
- Implication of P&T on Repository Footprint
 - Example: Repository Design According to VSG (salt)
- Impact of P&T on Long-Term Safety
 - Relevant and Less Relevant Nuclides
- Summary and Conclusions

Fundamentals

- P&T processes
- Type and amount of Spent Fuel considered for P&T
- Relevant nuclides in P&T processes



P&T¹⁴ Processes (flow-chart)

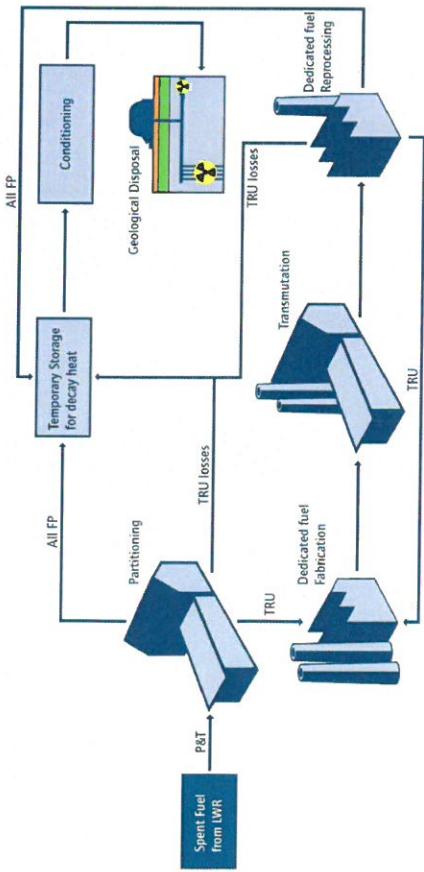

source: acatech, Berlin (2014)



Basis for Data: Phase-out of Nuclear Energy Production until End of 2022



6

Basis for Data: Phase-out of Nuclear Energy Production until End of 2022



7



8



9



10



11



12



13



14



15



16



17



18



19



20



21



22



23



24



25



26



27



28



29



30



31



32



33



34



35



36



37



38



39



40



41



42



43



44



45



46



47



48



49



50



51



52



53



54



55



56



57



58



59



60



61



62



63



64



65



66



67



68



69



70



71



72



73



74



75



76



77



78



79



80



81



82



83



84



85



86



87



88



89



90



91



92



93



94



95



96



97



98



99



100



101



102



103



104



105



106



107



108



109



110



111



112



113



114



115



116



117



118



119



120



121



122



123



124



125



126



127



128



129



130



131



132



133



134



135



136



137



138



139



140



141



142



143



144



145



146



147



148



149




150



Implementation of P&T on Repository Footprint

Implementation of P&T on Bonnector Eastwind

Implications

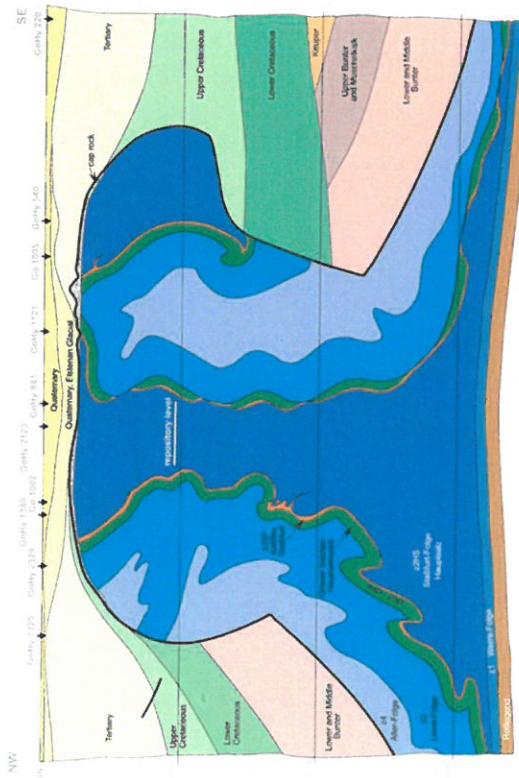

salt dome Gorleben: vertical cross section

— Implication of P&T on Repository Footprint


Implicit

repository footprint

- emplacement fields for SF reduced reprocessing remain unchanged
- ✓ emplacement fields for waste from SF remain unchanged
- ✓ emplacement fields for waste from research reactors remain unchanged
- ✓ infrastructure remains unchanged

reduction of repository footprint

- ✓ emplacement fields for SF reduced
 - ✓ emplacement fields for waste from reprocessing remain unchanged
 - ✓ emplacement fields for SF from research reactors remain unchanged
 - ✓ infrastructure remains unchanged



Impact of P&T on repository footprint

**Impact of
Borehole
Disposal
Concept**



Implicit

POLLUX® Cask Emplacement tests DBT-TEC



Impact of P&T on repository footprint

Implicit

POLLUX® Cask Emplacement tests DBT-TEC



Impact of P&T on repository footprint



Implicit

POLLUX® Cask Emplacement tests DBT-TEC



Impact of P&T on repository footprint

Borehole Disposal Concept

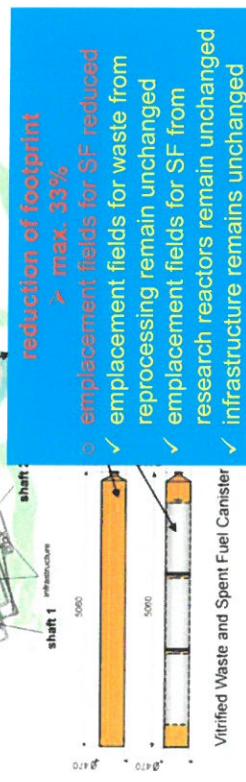
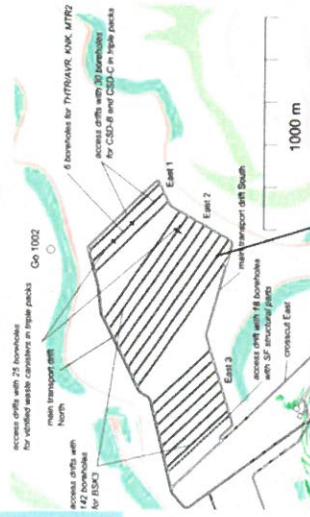


Bottlinger 09/2014

13

Impact of P&T on long-term safety

Potential radiation exposure in a repository in Opalinusclay

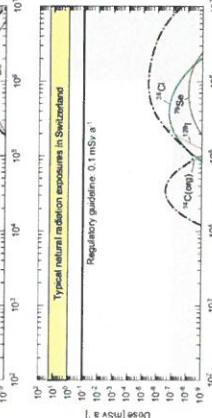

(source: Nagra)

DBE TEC

Bottlinger 09/2014

DBE TEC
DBE TECHNOLOGY GmbH
For Environmental Protection
For Sustainable Development
For Technological Progress

Impact of P&T on repository footprint

"Secondary" waste:

- waste produced during P&T processes (150 years)
 - over the total operating period approx. 100,000 m³ waste with negligible heat production will be produced
- Konrad repository not available for this waste
 - waste volume limited to 300,000 m³
- consequently an additional repository required
 - Size: one third of Konrad repository volume

DBE TEC
DBE TECHNOLOGY GmbH
For Environmental Protection
For Sustainable Development
For Technological Progress

14

Summary and Conclusions 1/2

- Even in case P&T were applied in Germany, a repository for heat-generating waste is needed for:

- already existing heat-generating waste from reprocessing
- spent fuel from research- and prototype nuclear power stations and research reactors
- heat-generating waste from reprocessing plants needed for P&T processes

- One half of the original repository footprint remains unchanged (drift disposal concept); two thirds of the footprint in case of borehole disposal concept
- One additional repository is needed for the disposal of the 100,000 m³ of secondary waste

DBE TEC
DBE TECHNOLOGY GmbH
For Environmental Protection
For Sustainable Development
For Technological Progress

15

Bottlinger 09/2014

Summary and Conclusions 2/2

- Model calculations (brine pathway) in the course of the preliminary safety analysis Gorleben did not show any relevant release of radionuclides;
➤ thus, P&T cannot provide any advantage in this regard
- Applying P&T mainly leads to a transmutation of radionuclides which have been shown in transport calculations as less relevant for the long-term safety of repositories.
- The amounts of fission and activating products relevant to the safety case will not be reduced by applying P&T, but rather increased.



Thank You
for Your Attention!

Exceptional service in the national interest

Sandia National Laboratories

September 2014

DBE TEC
D/E Technology GmbH

INTERNA
TIONAL
US/GERMAN WORKSHOP
Salt Repository Research,
Design, & Operation
Sandia, NM

PTKA
Project Management Agency Karlsruhe

SNL
Sandia National Laboratories

LANL
Los Alamos National Laboratory

US DoE
U.S. Department of Energy

TUM
Technische Universität München

NASA
National Aeronautics and Space Administration

NRG
NRG Energy

September 2014
Salt Repository Research, Design & Operation
Workshop
Sandia National Laboratories, New Mexico, USA
Los Alamos National Laboratory, New Mexico, USA
Technische Universität München, Germany
NASA Langley Research Center, Hampton, Virginia, USA
U.S. Department of Energy, Washington, D.C., USA

COVRA
NRG

Ministry of Economics

Housekeeping

Meetings

- Kick-off meeting, Apr. 20, 2012, Paris (15 participants)
- 1st meeting Dec. 4, 2012, Paris (25 participants)
- 2nd meeting, Sept. 16, 2013, Berlin (32 participants)
- 3rd meeting, Mar 18, 2014, Paris (20 participants)
- **next meeting Feb. 26, 2015, Paris (to be confirmed)**

Current mandate terminates end of 2015

- Renewal at annual IGSC meeting fall 2015

5th US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

Accomplishments

FINAL

SALT RECONSOLIDATION PRINCIPLES AND APPLICATIONS

Natural Analogues for Safety Cases of Repositories In Rock Salt

Membership

BGR IfG KIT TUC TUBS

DBE Technology GRS HZDR

SNL LANL US DoE EM, CFO Respec WIPP

OECD NEA

5th US/German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

GRS

Programme of Work until 2015 (I)

- Common FEP catalogue for a HLW repository in domal / bedded rock salt
- Salt Knowledge Archive
- Mechanical Behaviour of rock salt
 - Re-consolidation of rock salt
 - Creep of rock salt at low deviatoric stresses
 - Dilatant behaviour of rock salt
- Thermodynamic aspects of brine chemistry
 - ABC Salt Workshops
 - Joint International Pitzer Database

5th US German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

5

GRS

Programme of Work until 2015 (II)

- Microbial activities in rock salt
 - Report on existing data for microbial ecology in a salt repository
 - Identification of future work with potential relevance to safety case development
- Natural and anthropogenic analogues issues in rock salt

5th US German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

6

GRS

Concluding Remarks

- Salt Club is alive and active
 - already remarkable results achieved
 - ambitious work programme ahead
- Success depends on personal/institutional „devotion“
 - sometimes challenging to endure (budget constraints)
- Concentrate work
 - try to provide tangible results
- Focus on scientific issues with impact on the safety case development for a repository in salt rock

5th US German Workshop on Salt Repository Research, Design & Operation, Sept. 07-11, 2014, Santa Fe, USA - Mönig

7